
COSPAS-SARSAT MEOLUT COMMISSIONING STANDARD

C/S T.020
Issue 2 - Revision 1
June 2018

NOTE

This document includes requirements for non-static (moving) beacons with values that are to be determined. It has been recognized that the beacon motion (even small, e.g., caused by bobbing of an EPIRB in sea waves) degrades MEOSAR location performance for C/S T.001-compliant beacons and needs to be addressed. The effort to obtain satisfying results for SAR operations are ongoing as the Programme works towards meeting the expected performance requirements for MEOSAR.



COSPAS-SARSAT MEOLUT
COMMISSIONING STANDARD

HISTORY

<u>Issue</u>	<u>Revision</u>	<u>Date</u>	<u>Comments</u>
1	-	December 2015	Approved by the Cospas-Sarsat Council (CSC-55)
1	1	December 2016	Approved by the Cospas-Sarsat Council (CSC-57)
2	-	February 2018	Approved by the Cospas-Sarsat Council (CSC-59)
2	1	June 2018	Approved by the Cospas-Sarsat Council (CSC-60)

This document has been superseded
by a later version

TABLE OF CONTENTS

	Page
History.....	i
Table of Contents.....	ii
List of Figures.....	iii
List of Tables.....	iii
 1. INTRODUCTION	 1-1
1.1 Purpose 1-1	
1.2 Scope 1-1	
1.3 Reference Documents.....	1-1
 2. MEOLUT COMMISSIONING.....	 2-1
2.1 General 2-1	
2.2 Pre-Test Requirements	2-1
2.3 Test Data Collection.....	2-2
2.4 Frequency Registration.....	2-3
2.5 Data Collection Limitation.....	2-3
2.6 Reference System.....	2-4
2.7 Submission of Results	2-4
2.8 MEOLUT Commissioning and Integration.....	2-4
2.9 MEOLUT/MCC Interface	2-4
2.10 Confirmation of Requirements.....	2-4
2.11 Change of Configuration	2-5
2.11.1 Location of MEOLUT	2-5
2.11.2 Modification to MEOLUT Configuration (eg, Data Sources or Processing)	2-5
 3. EVALUATION OF OPERATIONAL REQUIREMENTS.....	 3-1
3.1 MEOLUT Data Availability.....	3-1
3.2 Data Requirements	3-1
3.3 Satellite Tracking and Visibility Capability	3-1
3.4 Status and Alarm	3-1
3.5 RF Radiation and Emissions	3-1
3.6 Data Archiving	3-1
 4. EVALUATION OF FUNCTIONAL AND PROCESSING REQUIREMENTS	 4-1
4.1 Functional Requirements.....	4-1

4.1.1	Antenna and RF Subsystems	4-1
4.1.2	Time and Frequency Reference Subsystem	4-1
4.1.3	Satellite Tracking Subsystem.....	4-1
4.1.4	MCC Interface	4-1
4.2	Beacon Message Processing.....	4-1
5.	EVALUATION OF PERFORMANCE REQUIREMENTS	5-1
5.1	Data Collection Test.....	5-1
5.1.1	Test Beacons	5-1
5.1.2	Satellite Tracking Schedule	5-2
5.2	Detection and Location Statistics	5-2
5.3	Detection and Location Data.....	5-2

LIST OF ANNEXES

ANNEX A MEOLUT COMMISSIONING REPORT

ANNEX B STATISTICS FOR OPERATIONAL REQUIREMENTS

ANNEX C STATISTICS FOR PERFORMANCE REQUIREMENTS

ANNEX D BEACON SIMULATOR TEST SCRIPT

ANNEX E DATA FORMAT

ANNEX F MEOLUT COMMISSIONING - PRINCIPLES AND POLICIES

ANNEX G GUIDELINES FOR INTEGRATION OF NEW MEOLUTS IN THE COSPAS-SARSAT SYSTEM

ANNEX H GUIDELINES FOR REGISTRATION OF NEW MEOLUTS WITH ITU

LIST OF FIGURES

Figure G.1: Overview of MEOLUT Integration.....	G-3
---	-----

LIST OF TABLES

Table A.1: MEOLUT Commissioning Summary Data Table (General Part).....	A-2
Table A.2: MEOLUT Commissioning Summary Data Table (C/S T.001 Beacon Part).....	A-3
Table A.3: MEOLUT Commissioning Summary Data Table (C/S T.018 Beacon Part).....	A-7
Table A.4: MEOLUT Test Beacon Location Table.....	A-13
Table A.5: MEOLUT Antenna Location Table	A-14

1. INTRODUCTION

1.1 Purpose

The Cospas-Sarsat MEOLUT Commissioning Standard shall be used to verify that a MEOSAR Local User Terminal (MEOLUT) complies with document C/S T.019, "Cospas-Sarsat MEOLUT Performance Specification and Design Guidelines". The national Administrations that wish to connect a new MEOLUT to the Cospas-Sarsat network shall conduct the tests and provide the data, which is specified in this document, to the Cospas-Sarsat Secretariat. The MEOLUT to be commissioned shall be fully described according to the technical file located in Annex A, Appendix 1.

1.2 Scope

This standard specifies MEOLUT commissioning for the 406 MHz data channels that are relayed through the MEOSAR satellites and received and processed by the MEOLUT. Section 2 defines the general commissioning process, section 3 describes the evaluation of the operational requirements, section 4 specifies the commissioning of functional and processing requirements, and section 5 specifies the commissioning of performance requirements. The annexes define the test requirements, signal characteristics, test beacon messages, the format of the test data which is to be collected, and the format of the commissioning report which is to be submitted to the Cospas-Sarsat Secretariat.

1.3 Reference Documents

The following documents contain useful information applicable to MEOLUT commissioning:

Reference	Title
C/S A.001	Cospas-Sarsat Data Distribution Plan (DDP)
C/S A.002	Cospas-Sarsat Mission Control Centres Standard Interface Description (SID)
C/S A.003	Cospas-Sarsat System Monitoring and Reporting
C/S A.005	Cospas-Sarsat MCC Performance Specification and Design Guidelines
C/S A.006	Cospas-Sarsat MCC Commissioning Standard
C/S T.001	Specification for Cospas-Sarsat 406 MHz Distress Beacons
C/S T.006	Cospas-Sarsat Orbitography Network Specification
C/S T.011	Description of the 406 MHz Payloads Used in the Cospas-Sarsat GEOSAR System
C/S T.016	Description of the 406 MHz Payload Used in the Cospas-Sarsat MEOSAR System
C/S T.015	Cospas-Sarsat Specification and Type Approval Standard for 406 MHz Ship Security Alert (SSAS) Beacons
C/S T.017	Cospas-Sarsat MEOSAR Space Segment Commissioning Standard
C/S T.018	Specification for Second Generation Cospas-Sarsat 406 MHz Distress Beacons
C/S T.019	Cospas-Sarsat MEOLUT Performance Specification and Design Guidelines

- END OF SECTION 1 -

This document has been superseded
by a later version

2. MEOLUT COMMISSIONING

2.1 General

The Cospas-Sarsat MEOLUT commissioning tests defined in this document are intended to be performed in addition to national acceptance tests, and are required prior to fully integrating a MEOLUT into the Cospas-Sarsat Ground Segment. Conducting these tests and assessing the results is the responsibility of the national Administration that desires to commission a MEOLUT.

The tests verify the MEOLUT's ability to receive and process signals transmitted from a distress beacon that is compliant with document C/S T.001, "Specification for Cospas-Sarsat 406 MHz Distress Beacons" or document C/S T.018, "Specification for Second Generation Cospas-Sarsat 406 MHz Distress Beacons", relayed by the MEOSAR satellites described in document C/S T.016, "Description of the 406 MHz Payload Used in the Cospas-Sarsat MEOSAR System", and received and processed in accordance with document C/S T.019. A cross reference of the requirements in document C/S T.019 and the corresponding commissioning requirements specified in this document is provided in the "Summary Table" of the commissioning report (Annex A). The tests shall be conducted with the MEOLUT in its operational configuration and location, and connected to the associated MCC. However, the data should not be distributed to other Cospas-Sarsat Ground Segment Operators.

The MEOLUT may provide optional capabilities as described in document C/S T.019, such as:

1. the MEOLUT may provide 406 MHz beacon data to other MEOLUTs according to the specifications contained in document C/S T.019,
2. the MEOLUT may process 406 MHz beacon data retrieved from other commissioned MEOLUTs according to the MEOLUT data exchange specifications contained in C/S T.019 to enhance system performance and support redundancy of the Cospas-Sarsat Ground Segment,
3. the ability to receive and process beacon signals received through downlinks from non-MEOSAR, Cospas-Sarsat commissioned satellites to obtain beacon data.

The MEOLUT must initially be commissioned with all optional capabilities disabled according to the non-optional tests described in Annex A. The optional capabilities, if to be used, must then be commissioned to verify that the MEOLUT meets all requirements as described by the optional tests contained in Annex A.

2.2 Pre-Test Requirements

Prior to commencing the test, the national Administration conducting the test shall coordinate with appropriate authorities in its SAR region, as well as notifying all affected Cospas-Sarsat MCCs, of the periods of operation and the location(s) of each of the test beacon(s). It is also invited to provide this information to the Cospas-Sarsat Secretariat.

Before the commissioning begins, the national Administration shall identify the Declared Coverage Area (DCA) of the MEOLUT, as described in document C/S T.019. The processing of a beacon located within the DCA shall meet the requirements in document C/S T.019. The DCA shall be verified using performance analysis, simulation, or both, and shall be equal to or greater than the Minimum Performance Area defined in document C/S T.019. The DCA shall indicate the declared coverage for each beacon identified in document C/S T.019; that is:

- the declared coverage for non-ELT(DT) C/S T.001 beacons, where relevant performance specifications are met,
- the declared coverage for ELT(DT) C/S T.001 beacons, where relevant performance specifications are met,
- the declared coverage for non-ELT(DT) C/S T.018 beacons, where relevant performance specifications are met,
- the declared coverage for ELT(DT) C/S T.018 beacons, where relevant performance specifications are met.

Assumptions with respect to visibility as per Annex D of document C/S T.019 and TOA/FOA data quality and single-channel throughput used in the analysis or simulation should be validated with data from Annex E.

The MEOLUT shall be commissioned with all assets that comprise the MEOLUT. However, if the DCA assumes fewer assets, for example, fewer antenna beams, then commissioning results shall also be reported for a MEOLUT in that configuration. In particular, if fewer antenna beams are used for the DCA, only data that results from an antenna tracking schedule generated using the fewer number of antenna beams shall be used in generating the results. This may result in the need for two sets of results, one for the MEOLUT with all available assets, and one for the MEOLUT with the configuration needed for the DCA.

2.3 Test Data Collection

The commissioning process for the MEOLUT comprises the collection of specific beacon messages and the specified numbers of solutions. The MEOLUT shall utilize beacon data received directly from downlinks from MEOSAR satellites for the data acquisition and statistical data analysis for the commissioning tests.

Data collection for commissioning a MEOLUT's optional capabilities are as follows:

1. The MEOLUT may provide 406 MHz beacon data to other MEOLUTs according to the specifications contained in document C/S T.019. Data collected directly from downlinks from commissioned MEOSAR satellites that comply with documents C/S T.016, "Description of the 406 MHz Payload Used in the Cospas-Sarsat MEOSAR System" and document C/S T.017 "Cospas-Sarsat MEOSAR Space Segment Commissioning Standard" shall be used for the data acquisition and statistical data analysis for the commissioning tests.
2. The MEOLUT may process 406 MHz beacon data retrieved from other commissioned MEOLUTs according to the MEOLUT data exchange specifications contained in document

C/S T.019. Data from every MEOLUT that will provide data to the MEOLUT being commissioned shall be used for the data acquisition and statistical data analysis for the commissioning tests.

3. The ability to receive and process beacon signals received through downlinks from non-MEOSAR, Cospas-Sarsat commissioned satellites to obtain beacon data. Data collected from every non-MEOSAR, Cospas-Sarsat commissioned satellite that will be used shall be included in the data acquisition and statistical data analysis for the commissioning tests.

2.4 Frequency Registration

Administrations should register their MEOLUT's use of the 1544 to 1545 MHz frequency band by "notifying" their MEOLUTs with the International Telecommunication Union (ITU) in accordance with article 11 of the radio regulations. The information required to notify MEOLUTs is identified at Annex H. The ITU only accepts notification requests submitted in electronic format and has developed a software application, available free of charge from their web site, which captures the required information and produces the necessary electronic file.

2.5 Data Collection Limitation

Only the data collected from those satellite channels that comply with documents C/S T.016 and C/S T.017 shall be used for the statistical data analysis. Data from satellites in an Initial Operational Capability (IOC) status should not be used for test data collection.

The data collection limitations for commissioning a MEOLUT's optional capabilities are as follows:

1. The MEOLUT may provide 406 MHz beacon data to other MEOLUTs according to the specifications contained in document C/S T.019. Only the data collected from those satellite channels that comply with documents C/S T.016 and C/S T.017 shall be used for the statistical data analysis. Data from satellites in an Initial Operational Capability (IOC) status should not be used for test data collection.
2. The MEOLUT may process 406 MHz beacon data retrieved from other commissioned MEOLUTs according to the MEOLUT data exchange specifications contained in C/S T.019 to enhance system performance and support redundancy of the Cospas-Sarsat Ground System. Only data that has been retrieved from a commissioned MEOLUT that has also been commissioned to provide 406 MHz beacon data to other MEOLUTs may be used.
3. The MEOLUT may have the ability to receive and process beacon signals received through downlinks from non-MEOSAR, Cospas-Sarsat commissioned satellites to obtain beacon data. Only the data collected from commissioned satellites shall be used. Data from satellites in an Initial Operational Capability (IOC) status should not be used for test data collection.

2.6 Reference System

All location data for the MEOLUT commissioning shall be given with respect to the Bureau International de l'Heure (BIH) geodetic reference system.

2.7 Submission of Results

The results of the MEOLUT commissioning process shall be documented in the commissioning report, in accordance with the format detailed at Annex A.

The complete commissioning report and the data files detailed at Annex E are to be submitted to the Cospas-Sarsat Secretariat for further evaluation, and distribution to Participants for subsequent review at the Joint Committee. Revisions or updates to commissioning reports should be provided to the Secretariat with a clear indication given on the cover page of the sections that have been revised and a short description of the nature of the revisions.

In order to provide Participants with sufficient time to adequately review the commissioning report, all reports (or updates) must be submitted to the Secretariat a minimum of six weeks prior to the start of the Joint Committee meeting. Submissions received after this date will be considered for review at the following Joint Committee meeting.

2.8 MEOLUT Commissioning and Integration

The test results, as defined in the annexes, shall be submitted to the Cospas-Sarsat Secretariat. The results will be reviewed by the Cospas-Sarsat Secretariat and submitted to the Joint Committee. The MEOLUT will be integrated into the Cospas-Sarsat Ground Segment as described in Annex F and Annex G.

2.9 MEOLUT/MCC Interface

Validation that the MEOLUT/MCC interface satisfies the minimum requirements of document C/S T.019 shall be completed by the national Administration as part of the MEOLUT commissioning.

2.10 Confirmation of Requirements

The national Administration shall confirm compliance to all requirements detailed in this document with either a measurement, a verification, a declaration, analysis or a combination of these methods:

- a) A measurement requires the national Administration to conduct a test and include the supporting data as part of the commissioning report.
- b) A verification requires a national Administration to test a requirement; however, supporting data does not need to be provided as part of the commissioning report.

- c) A declaration of compliance confirms that specific requirements are met although not necessarily tested as part of the commissioning process.
- d) Analysis requires the national Administration to provide analysis as part of the commissioning report that confirms that specific requirements are met.

Conformance to all requirements shall be documented in the commissioning report.

The exact method of confirming compliance for each respective requirement is identified in the summary table of the commissioning report (Annex A).

2.11 Change of Configuration

2.11.1 Location of MEOLUT

If the location of a commissioned MEOLUT has been changed, the responsible national Administration shall ensure that the MEOLUT continues to satisfy C/S T.019 requirements prior to resuming operations. Additionally, the national Administration shall:

- a) confirm that the level of local interference does not adversely affect the MEOLUT performance;
- b) verify the performance of the communication links;
- c) verify the performance of the antenna and RF subsystems; and
- d) update the technical file of the MEOLUT commissioning report (Appendix 1 to Annex A refers) by providing a declaration that the MEOLUT satisfies C/S T.019 requirements and the following information, to the Cospas-Sarsat Secretariat:
 - Antenna Characteristics (Annex A, Appendix 1, section A.2.1),
 - General LUT Indoor Equipment Description (Annex A, Appendix 1, section A.2.2) - identify any changes to the equipment configuration, or indicate “no change” if the configuration has not been changed,
 - General Capabilities (Annex A, Appendix 1, section A.2.3), - identify any changes to the general capabilities of the MEOLUT, or indicate “no change” if appropriate,
 - Communications Capability (Annex A, Appendix 1, section A.4),
 - Coverage (Annex A, Appendix 1, section A.5),
 - Location (Annex A, Appendix 1, section A.6).

2.11.2 Modification to MEOLUT Configuration (eg, Data Sources or Processing)

If the configuration of a commissioned MEOLUTs has been changed, the responsible national Administration shall ensure that the MEOLUT continues to satisfy C/S T.019 requirements prior to resuming operations. After the configuration change, Administrations shall confirm the MEOLUT satisfies C/S T.019 before distributing data from the MEOLUT operationally. Additionally, the national Administration shall:

- a. verify the performance of the antenna and RF subsystems if adding a new antenna;
- b. conduct tests defined in Annex A, Table A.1 for section 5.8.2 of C/S T.019;
- c. update the technical file of the MEOLUT commissioning report (Appendix 1 to Annex A refers) by providing a declaration that the MEOLUT satisfies C/S T.019 requirements and the following information, to the Cospas-Sarsat Secretariat:
 - i. Antenna Characteristics (Annex A, Appendix 1, section A.2.1) if adding a new antenna, or indicate “no change” if the configuration has not been changed,
 - ii. General LUT Indoor Equipment Description (Annex A, Appendix 1, section A.2.2) - identify any changes to the equipment configuration, or indicate “no change” if the configuration has not been changed,
 - iii. General Capabilities (Annex A, Appendix 1, section A.2.3), - identify any changes to the general capabilities of the MEOLUT, or indicate “no change” if appropriate,
 - iv. Communications Capability (Annex A, Appendix 1, section A.4),
 - v. Coverage (Annex A, Appendix 1, section A.5).

Some conditions that may be considered a change in configuration that would warrant conducting these tests might include:

- a. adding a new antenna or channel to a commissioned MEOLUT;
- b. adding data collection from other commissioned MEOLUTs that exchange data according to the MEOLUT data exchange specifications contained in document C/S T.019; and
- c. significant modifications to the MEOLUT processing algorithm(s), other software, or hardware.

The responsible administration shall submit results of its verification of MEOLUT performance in a supplementary commissioning report to the Joint Committee meeting for subsequent review.

- END OF SECTION 2 -

3. EVALUATION OF OPERATIONAL REQUIREMENTS

3.1 MEOLUT Data Availability

The MEOLUT data availability shall be measured during the commissioning period in accordance with guidance provided at Annex B. If any basic function or requirement is not performed by the MEOLUT, the MEOLUT data shall be considered unavailable.

A reliability assessment is performed by measurement during the commissioning period and by an analysis that predicts the availability for a one-year period to verify that the MEOLUT will meet the availability requirement in accordance with guidance provided at Annex B.

3.2 Data Requirements

The national Administration shall ensure that the MEOLUT provides the data necessary for the associated MCC to distribute alert data according to document C/S A.002 (SID). This shall be verified and noted in the appropriate section of the MEOLUT commissioning report.

3.3 Satellite Tracking and Visibility Capability

The national Administration shall ensure that the MEOLUT shall be capable of meeting the requirements of section 3.4 in document C/S T.019. This shall be declared in the appropriate section of the MEOLUT commissioning report.

3.4 Status and Alarm

The national Administration shall describe the status and alarm functions of the MEOLUT and declare compliance in the appropriate section of the MEOLUT commissioning report.

3.5 RF Radiation and Emissions

The national Administration shall ensure that the MEOLUT does not radiate or emit any radio frequency signals that will interfere with the functioning of the Cospas-Sarsat System. This shall be declared in the appropriate section of the MEOLUT commissioning report.

3.6 Data Archiving

The national Administration shall describe the data archiving capability of the MEOLUT and declare compliance to the relevant section of document C/S T.019 in the appropriate section of the MEOLUT commissioning report.

- END OF SECTION 3 -

This document has been superseded
by a later version

4. EVALUATION OF FUNCTIONAL AND PROCESSING REQUIREMENTS

4.1 Functional Requirements

4.1.1 Antenna and RF Subsystems

The national Administration shall verify that the antenna and RF subsystems of the MEOLUT can acquire, track and receive the downlink signals from any Cospas-Sarsat MEOSAR satellites as described in document C/S T.016. This verification shall be documented in the MEOLUT commissioning report.

4.1.2 Time and Frequency Reference Subsystem

The national Administration shall declare in the MEOLUT commissioning report, the MEOLUT's capability to maintain time and frequency subsystems according to document C/S T.019.

4.1.3 Satellite Tracking Subsystem

The national Administration shall declare, in the MEOLUT commissioning report, the MEOLUT's capability to maintain accurate satellite orbital elements and tracking schedules as described in document C/S T.019.

4.1.4 MCC Interface

The national Administration shall verify that the MEOLUT provides timely alert data of the level of quality and detail specified in documents C/S T.019, C/S A.002 and C/S A.005, "Cospas-Sarsat Mission Control Centre Performance Specification and Design Guidelines". This verification shall be documented in the MEOLUT commissioning report.

4.2 Beacon Message Processing

The national Administration shall conduct tests, and record the results in the appropriate section of the commissioning report, which confirm the MEOLUTs compliance to the "channels processing specifications" detailed in document C/S T.019.

These tests require the MEOLUT to process the data described at Annex D.1 in the manner prescribed. The processing consists of bit verification, message validation, message processing and transmission. The specific beacon test messages contained at Annex D.1 can be transmitted by a test beacon or a beacon simulator.

National Administrations should ensure that test beacons or simulators are capable of transmitting the beacon messages at the frequencies described at Annex D.1. Alternatively, national Administrations may arrange for the simulators in the United States or France to uplink the messages contained at

Annex D.1. If the test messages cannot be transmitted during the commissioning period, the national Administration may develop alternative methods of confirming compliance with the beacon message processing requirements and proceed with the commissioning test, and preparation and submission of the commissioning report. For beacon message processing, the unavailability of the test beacon or simulators to uplink the test messages contained at Annex D.1 shall not prevent the MEOLUT from being commissioned, if other adequate methods are used. If alternative methods are used, these methods shall be completely documented in the commissioning report.

- END OF SECTION 4 -

This document has been superseded
by a later version

5. EVALUATION OF PERFORMANCE REQUIREMENTS

The national Administration shall conduct the tests defined at Annex C to confirm conformance with the MEOLUT performance requirements detailed at document C/S T.019. The results of these tests shall be included in the MEOLUT commissioning report. Additional guidance pertaining to the tests detailed at Annex C is provided in the remainder of this section.

5.1 Data Collection Test

Tests shall be conducted to confirm that the MEOLUT processing satisfies the performance requirements detailed in document C/S T.019.

All data collected from test beacons during the entire time period of the commissioning test shall be used to generate statistics that validate the performance requirements are met.

All data and results shall be provided electronically to the Secretariat as part of the commissioning report. The required data elements and the format of the files to be included in the commissioning report are detailed in Annex E.

5.1.1 Test Beacons

Beacon tests shall be conducted with type-approved Cospas-Sarsat 406 MHz beacons coded with the test protocol and/or beacon simulators (i.e., not an orbitography beacon), as described in document C/S T.022. The beacons that are used for these tests shall not be used for updating the satellite orbital elements. However, any reference beacon that is not used by the MEOLUT for the determination of satellite orbits may be used as a test beacon during the commissioning of the MEOLUT. The characteristics of all beacons used during commissioning shall be described in the commissioning report.

Each test beacon must be placed as described below at a 3D position that is known to within 5 metres, and shall remain fixed at this position throughout the test (except for tests involving moving beacons). For tests involving moving beacons, a reference trajectory shall be provided with an accuracy of 100 metres. The test beacon locations shall be given with respect to the reference system given in section 2.6.

- 1) Use test beacon(s) located at the MEOLUT to perform all commissioning tests to verify the MEOLUT meets all performance requirements.
- 2) Use 1 or more test beacon(s) located as near the edge of the Declared Coverage Area as practical or at least 1,000 km from the MEOLUT, to demonstrate the MEOLUT Declared Coverage Area.

These tests require the MEOLUT to process the data described at Annex D.2 in the manner prescribed. The processing consists of beacon detection probability, probability of DOA location, DOA location accuracy, TOA/FOA measurement accuracy (if applicable), and expected horizontal error / quality

factor. The specific beacon test messages contained at Annex D.2 can be transmitted by a test beacon or a beacon simulator.

Beacons, and their set-up, used for the moving test configurations shall be documented in the commissioning report. Their location and velocity as a function of time shall be reported in the commissioning report.

National Administrations should ensure that test beacons or simulators are capable of transmitting the beacon messages at the frequencies described at Annex D.2. Alternatively, national Administrations may arrange for the simulators in the USA or France to uplink the messages contained at Annex D.2. If the test messages cannot be transmitted during the commissioning period, the national Administration may develop alternative methods of confirming compliance with the beacon message processing requirements and proceed with the commissioning test, and preparation and submission of the commissioning report. The unavailability of the test beacon or simulators to uplink the test messages contained at Annex D.2 shall not prevent the MEOLUT from being commissioned, if other adequate methods are used. If alternative methods are used, these methods shall be completely documented in the commissioning report.

If test beacons transmit in the operational 406 MHz frequency band or if beacon bursts are transmitted using the normal frame synchronization pattern, the total number of beacons simultaneously active shall not exceed 5.

5.1.2 Satellite Tracking Schedule

Beacon tests shall consist of receiving and processing data on all scheduled passes from the commissioned satellites that are visible during the test period. All available data channels shall be used for the collection of data from available satellites during this data collection test.

5.2 Detection and Location Statistics

Statistics will be reported for beacons identified in section 5.1.1, item 1, and separately for those identified in item 3.

Statistics will be also reported for all orbitography/reference beacons defined in document C/S A.001.

The statistics are defined in Annex A and shall be derived as listed in Annex C.

5.3 Detection and Location Data

The detection and location data from all tracked satellite passes shall be provided for each test beacon used during the test period.

A minimum of 1,000 for C/S T.001- and 10,000 for C/S T.018-beacon burst transmissions shall be used to establish the detection data statistics. A minimum of 1,000 location data solutions shall be used to establish the location data statistics for both C/S T.001 and C/S T.018 beacons.

A minimum of 100,000 detections shall be used to establish the processing anomaly statistics.

- END OF SECTION 5 -

This document has been superseded
by a later version

ANNEX A**MEOLUT COMMISSIONING REPORT**

Country or national Administration: _____

Cospas-Sarsat Identifier: _____

Location of MEOLUT: _____

Start of Commissioning Period: _____

End of Commissioning Period: _____

Section A.1 contains a summary of the commissioning results as well as the analysis (A), declarations (D) and verifications (V), by the national Administration, for requirements not specifically measured (M). The organization of the summary table follows the requirements contained in document C/S T.019.

Section A.2. contains the measurements (M) to support the results presented in section A.1, a copy of the associated data is provided in electronic format as required by this document. A technical description of the MEOLUT is presented in Appendix 1.

A.1 Summary Table

Table A.1: MEOLUT Commissioning Summary Data Table (General Part)

Section in C/S T.019	Requirement or Test	Pass Criteria	Result or Report Ref	Pass/Fail	Method of Compliance	Declaration / Verification or Comments
3.1	MEOLUT Data Availability	A≥95	2.1.1		M, A	
3.2	Data Requirements	n/a	n/a		D, V	Verify capability to use standard formats in Table 3.1 of C/S T.019. If non-standard formats will be used, declare and verify this capability.
3.3.1	Satellite Data Channels	Minimum MEOSAR	n/a		V	
3.3.2	MEOLUT Data Exchange	n/a	n/a		D	Only applicable to MEOLUTs which exchange data with other MEOLUTs
3.4	Satellite Tracking and Visibility	n/a	n/a		V	
3.5	Status and Alarm	n/a	n/a		D	Include description in technical file
3.6	RF Radiation and Emissions	n/a	n/a		D	
3.7	Data Archiving	n/a	n/a		D	
3.8	QMS	n/a			D	
4.1.1	Antenna and RF Subsystem	n/a	n/a		V	
4.1.2	Time and Frequency Reference Subsystem	n/a	n/a		V	
4.1.3	Satellite Tracking Subsystem	All MEOSAR satellites	n/a		D	
4.1.4	MCC Interface	n/a	n/a		V	
4.2.7	MEOLUT Data Exchange	See C/S T.019 Annex C	n/a		D	Only applicable to MEOLUTs which exchange data with other MEOLUTs
4.2.8	Time and Frequency Requirements	n/a	n/a		D	
4.2.9	Independent Location Processing	n/a	n/a		V	Check generation of location and validity
4.2.10	Transmitting Data to the MCC	n/a	n/a		V	Using MCC message log table as defined in Annex E. See additional tests for-ELT (DT) beacons in Tables A.2 and A.3
5	<i>Declared Coverage Area (for each beacon identified in document C/S T.019)</i>	<i>n/a</i>	<i>Appendix 1, A.5</i>		<i>A and/or V</i>	<i>See section Appendix 1, section A.5</i>

Table A.2: MEOLUT Commissioning Summary Data Table (C/S T.001 Beacon Part)

Section in C/S T.019	Requirement or Test	Pass Criteria	Result or Report Ref	Pass/Fail	Method of Compliance	Declaration / Verification or Comments
4.2.2	Beacon Message Recovery	Exact match on 9 Bit Frame Synch	n/a		D	Achieve identical match on 9 bit frame synchronization
See para 2.2.4.B to C/S T.001	Bit Rate Tolerance Check Test - BR1	M/N>0.75			M	
4.2.3.1	Bit Verification Test - BV1	See Annex D.1	2.2.1		M	
	Bit Verification Test - BV2	See Annex D.1	2.2.1		M	
	Bit Verification Test - BV3	See Annex D.1	2.2.1		M	
4.2.4.1	Beacon Message Validation Test - MV1	See Annex D.1	2.2.2		M	
	Beacon Message Validation Test - MV2	See Annex D.1	2.2.2		M	
	Beacon Message Validation Test - MV5	See Annex D.1	2.2.2		M	
	Beacon Message Validation Test - MV6	See Annex D.1	2.2.2		M	
	Beacon Message Validation Test - MV7	See Annex D.1	2.2.2		M	
4.2.6.1	Beacon Message Processing Test - LP1	See Annex D.1	2.2.3		M	
	Beacon Message Processing Test - LP2	See Annex D.1	2.2.3		M	
	Beacon Message Processing Test - LP3	See Annex D.1	2.2.3		M	
	Beacon Message Processing Test - LP4	See Annex D.1	2.2.3		M	
4.2.10	Transmitting Data to the MCC	n/a	n/a		V	Using MCC message log table as defined in Annex E For C/S T.001 ELT (DT) beacons using script in section D.3.2.2
5.1	RF Signal Margin	n/a	n/a		D	
5.2.1	Signal Sensitivity	Signal sensitivity better than 34.8 dB-Hz			D	
5.3.1	Beacon Message Detection Probability	$T \geq 0.99$	2.3.1.1		M	After 10 minutes
	Beacon Message Detection Probability (ELT(DT))	$T > 0.99$	2.3.1.1		M	Within any 1 minute period
5.4.1.1, 5.4.2.1	Probability of FDOA/TDOA Location	$PL \geq 0.90$	2.3.1.2		M	Single burst
		$PL \geq 0.98$	2.3.1.2		M	After 10 minutes
	Probability of FDOA/TDOA Location EOC	$PL \geq 0.75$	2.3.1.2		M	Single burst
		$PL \geq 0.98$	2.3.1.2		M	After 20 minutes
5.5.1	Capacity	100 beacons	n/a		D	
5.6.1	Location Accuracy (nearly-static beacon)	$M/N \geq 0.90$ (5 km)	2.3.1.3		M	Single Burst

Section in C/S T.019	Requirement or Test	Pass Criteria	Result or Report Ref	Pass/Fail	Method of Compliance	Declaration / Verification or Comments
	Location Accuracy EOC	M/N $\geq$ 0.70 (5 km)	2.3.1.3		M	Single Burst
		M/N $\geq$ 0.90 (10 km)	2.3.1.3		M	Single Burst
	Location Accuracy (nearly-static beacon)	M/N $\geq$ 0.95 (5 km)	2.3.1.3		M	Within 10 minutes
		M/N $\geq$ 0.98 (10 km)	2.3.1.3		M	Within 10 minutes
	Location Accuracy EOC	M/N $\geq$ 0.95 (5 km)	2.3.1.3		M	Within 20 minutes
		M/N $\geq$ 0.98 (10 km)	2.3.1.3		M	Within 20 minutes
5.6.3	Location Accuracy (slow-moving beacon)	M/N $\geq$ 0.90 (TBD km)	2.3.1.3		M	Single Burst
	Location Accuracy (slow-moving beacon)	M/N $\geq$ 0.95 (TBD km)	2.3.1.3		M	Within 10 minutes
		M/N $\geq$ 0.98 (TBD km)	2.3.1.3		M	Within 10 minutes
5.6.5 ¹	Location Accuracy (fast-moving beacon)	M/N $>$ 0.90 (TBD km)	2.3.1.3		M	Single Burst
	Location Accuracy (fast-moving beacon)	M/N $\geq$ 0.95 (TBD km)	2.3.1.3		M	Within 10 minutes
		M/N $\geq$ 0.98 (TBD km)	2.3.1.3		M	Within 10 minutes
5.7	Processing Bandwidth	406.010 to 406.090 MHz	n/a		D	
5.8.1.1	TOA/FOA Measurement Accuracy	TOA _o < 25 μ sec TOA _{bias} < 2.5 μ sec FOA _o < 0.2 Hz FOA _{bias} < 0.02 Hz	2.3.2.5		M	Only applicable to MEOLUTs which will provide data to other MEOLUTs 34.8 dBHz < C/N ₀ < 37.8 dBHz
5.8.2	External Data Processing	C/S T.019 sections 4.2.9 and 5			D	Only applicable to MEOLUTs which process data from other MEOLUTs
	Transmitting Data to the MCC	n/a	n/a		V	Using MCC message log table as defined in Annex E. For C/S T.001 ELT (DT) beacons using script in section D.3.2.2
	RF Signal Margin	n/a	n/a		D	
	Signal Sensitivity	Signal sensitivity better than 34.8 dB-Hz			D	
	Beacon Message Detection Probability	T $\geq$ 0.99	2.3.2.1		M	After 10 minutes
	Beacon Message Detection Probability (ELT(DT))	T $>$ 0.99	2.3.2.2		M	Within any 1 minute period
	Probability of FDOA/TDOA Location	PL $\geq$ 0.90	2.3.2.3		M	Single burst
		PL $\geq$ 0.98	2.3.2.3		M	After 10 minutes
		PL $\geq$ 0.75	2.3.2.3		M	Single burst

¹ A MEOLUT is not required to provide an independent location for ELT(DT)s unless the MEOLUT is commissioned to provide independent location for fast-moving beacons.

Section in C/S T.019	Requirement or Test	Pass Criteria	Result or Report Ref	Pass/Fail	Method of Compliance	Declaration / Verification or Comments
	Probability of FDOA/TDOA Location EOC	$PL \geq 0.98$	2.3.2.3		M	After 20 minutes
	Capacity	100 beacons	n/a		D	
	Location Accuracy (nearly-static beacon)	$M/N \geq 0.90$ (5 km)	2.3.2.3		M	Single Burst
	Location Accuracy EOC	$M/N \geq 0.70$ (5 km)	2.3.2.3		M	Single Burst
		$M/N \geq 0.90$ (10 km)	2.3.2.3		M	Single Burst
	Location Accuracy (nearly-static beacon)	$M/N \geq 0.95$ (5 km)	2.3.2.3		M	Within 10 minutes
		$M/N \geq 0.98$ (10 km)	2.3.2.3		M	Within 10 minutes
	Location Accuracy EOC	$M/N \geq 0.95$ (5 km)	2.3.2.3		M	Within 20 minutes
		$M/N \geq 0.98$ (10 km)	2.3.2.3		M	Within 20 minutes
	Location Accuracy (slow-moving beacon)	$M/N \geq 0.90$ (TBD km)	2.3.2.3		M	Single Burst
	Location Accuracy (slow-moving beacon)	$M/N \geq 0.95$ (TBD km)	2.3.2.3		M	Within 10 minutes
		$M/N \geq 0.98$ (TBD km)	2.3.2.3		M	Within 10 minutes
	Location Accuracy (fast-moving beacon)	$M/N > 0.90$ (TBD km)	2.3.2.3		M	Single Burst
	Location Accuracy (fast-moving beacon)	$M/N \geq 0.95$ (TBD km)	2.3.2.3		M	Within 10 minutes
		$M/N \geq 0.98$ (TBD km)	2.3.2.3		M	Within 10 minutes
5.9	Processing Bandwidth	406.010 to 406.090 MHz	n/a		D	
	Expected Horizontal Error / Quality Factor	Prediction accurate 95%	2.3.1.5		M	Results reported but will not be judged as pass or fail criteria during EOC.
	Processing Anomalies	$< 1 \times 10^{-4}$	2.3.1.6		M	Results reported but will not be judged as pass or fail criteria during EOC. Processing anomalies that consist of a single burst from a single satellite shall be identified separately
	Combined Processing	C/S T.019 sections 4.2.9 and 5			D	Only applicable to MEOLUTs which use non-MEOSAR C/S satellites
	Transmitting Data to the MCC	n/a	n/a		V	Using MCC message log table as defined in Annex E For C/S T.001 ELT (DT) beacons using script in section D.3.2.2
	RF Signal Margin	n/a	n/a		D	
	Signal Sensitivity	Signal sensitivity better than 34.8 dB-Hz			D	
	Beacon Message Detection Probability	$T \geq 0.99$	2.3.3.1		M	After 10 minutes

Section in C/S T.019	Requirement or Test	Pass Criteria	Result or Report Ref	Pass/Fail	Method of Compliance	Declaration / Verification or Comments
	Beacon Message Detection Probability (ELT(DT))	$T > 0.99$	2.3.3.2		M	Within any 1 minute period
	Probability of FDOA/TDOA Location	$PL \geq 0.90$	2.3.3.3		M	Single burst
		$PL \geq 0.98$	2.3.3.3		M	After 10 minutes
	Probability of FDOA/TDOA Location EOC	$PL \geq 0.75$	2.3.3.3		M	Single burst
		$PL \geq 0.98$	2.3.3.3		M	After 20 minutes
	Capacity	100 beacons	n/a		D	
	Location Accuracy (nearly-static beacon)	$M/N \geq 0.90$ (5 km)	2.3.3.3		M	Single Burst
	Location Accuracy EOC	$M/N \geq 0.70$ (5 km)	2.3.3.3		M	Single Burst
		$M/N \geq 0.90$ (10 km)	2.3.3.3		M	Single Burst
	Location Accuracy (nearly-static beacon)	$M/N \geq 0.95$ (5 km)	2.3.3.3		M	Within 10 minutes
		$M/N \geq 0.98$ (10 km)	2.3.3.3		M	Within 10 minutes
	Location Accuracy EOC	$M/N \geq 0.95$ (5 km)	2.3.3.3		M	Within 20 minutes
		$M/N \geq 0.98$ (10 km)	2.3.3.3		M	Within 20 minutes
	Location Accuracy (slow-moving beacon)	$M/N \geq 0.90$ (TBD km)	2.3.3.3		M	Single Burst
	Location Accuracy (slow-moving beacon)	$M/N \geq 0.95$ (TBD km)	2.3.3.3		M	Within 10 minutes
		$M/N \geq 0.98$ (TBD km)	2.3.3.3		M	Within 10 minutes
	Location Accuracy (fast-moving beacon)	$M/N > 0.90$ (TBD km)	2.3.3.3		M	Single Burst
	Location Accuracy (fast-moving beacon)	$M/N \geq 0.95$ (TBD km)	2.3.3.3		M	Within 10 minutes
		$M/N \geq 0.98$ (TBD km)	2.3.3.3		M	Within 10 minutes
	Processing Bandwidth	406.010 to 406.090 MHz	n/a		D	
	Expected Horizontal Error / Quality Factor	Prediction accurate 95%	2.3.1.5		M	Results reported but will not be judged as pass or fail criteria during EOC
	Processing Anomalies	$< 1 \times 10^{-4}$	2.3.1.6		M	Results reported but will not be judged as pass or fail criteria during EOC. Processing anomalies that consist of a single burst from a single satellite shall be identified separately.
5.10	Expected Horizontal Error / Quality Factor	Prediction accurate 95%	2.3.1.4		M	Results reported but will not be judged as pass or fail criteria during EOC.
5.11	Processing Anomalies	$< 1 \times 10^{-4}$	2.3.1.5		M	Results reported but will not be judged as pass or fail criteria during EOC. Processing anomalies that consist of a single burst from a single satellite shall be identified separately.

Table A.3: MEOLUT Commissioning Summary Data Table (C/S T.018 Beacon Part)

Section in C/S T.019	Requirement or Test	Pass Criteria	Result or Report Ref	Pass/Fail	Method of Compliance	Declaration / Verification or Comments
4.2.2	Beacon Message Recovery - MR1	See Annex D.1	3.2.1		D	
	Beacon Message Recovery - MR2	See Annex D.1	3.2.1		D	
	Beacon Message Recovery - MR3	See Annex D.1	3.2.1		D	
See TBD to C/S T.018	C/S T.018 Bit Rate Tolerance Check Test - TBD	TBD			M	
4.2.3.2	Bit Verification - BV1	See Annex D.1	3.2.2		M	
4.2.6.2	Message Association - MA1	See Annex D.1	3.2.3			
4.2.10	Transmitting Data to the MCC	n/a	n/a		V	Using MCC message log table as defined in Annex E. For C/S T.018 ELT (DT) beacons using script in section D.3.4.2.
5.1	RF Signal Margin	n/a	n/a		D	
5.2.2	Signal Sensitivity	Signal sensitivity better than 30.55 dB-Hz			D	
5.3.2	Beacon Message Detection Probability	$T \geq 0.999$	3.3.1.1		M	After 30 seconds
	Beacon Message Detection Probability (ELT(DT))	$T > 0.99$	3.3.1.2			Within any 1 minute period
5.4.1.2, 5.4.2.2	Probability of FDOA/TDOA Location	$PL \geq 0.95$	3.3.1.3		M	Single burst
		$PL \geq 0.98$	3.3.1.3		M	Within 30 seconds
		$PL \geq 0.98$	3.3.1.3		M	Within 5 minutes
		$PL \geq 0.98$	3.3.1.3		M	Within 30 minutes
5.5.2	Capacity	100 beacons	n/a		D	
5.6.2	Location Accuracy (nearly-static beacon)	$M/N \geq 0.95$ (5 km)	3.3.1.4		M	Single Burst
		$M/N \geq 0.97$ (5 km)	3.3.1.4		M	Within 30 seconds
		$M/N \geq 0.97$ (1 km)	3.3.1.4		M	Within 5 minutes
		$M/N \geq 0.97$ (0.1 km)	3.3.1.4		M	After 30 minutes
5.6.4	Location Accuracy (slow-moving beacon)	$M/N \geq 0.95$ (5 km)	3.3.1.4		M	Single Burst
		$M/N \geq 0.97$ (5 km)	3.3.1.4		M	Within 30 seconds
		$M/N \geq 0.97$ (1 km)	3.3.1.4		M	Within 5 minutes
5.6.6	Location Accuracy (fast-moving beacon)	$M/N \geq 0.95$ (TBD km)	3.3.1.4		M	Single Burst
		$M/N \geq 0.97$ (TBD km)	3.3.1.4		M	Within 30 seconds
		$M/N \geq 0.97$ (TBD km)	3.3.1.4		M	Within 5 minutes

Section in C/S T.019	Requirement or Test	Pass Criteria	Result or Report Ref	Pass/Fail	Method of Compliance	Declaration / Verification or Comments
5.7	Processing Bandwidth	Center frequency in the range 406.05 MHz $\pm$ [3] kHz	n/a		D	
5.8.1.2	TOA/FOA Measurement Accuracy	TOA _σ < [1] μsec TOA _{bias} < [0.2] μsec FOA _σ < [0.2] Hz FOA _{bias} < [0.02] Hz	3.3.2.6		M	Only applicable to MEOLUTs which will provide data to other MEOLUTs [30.55] dBHz < C/N ₀ < [33.55] dBHz
5.8.2	External Data Processing	C/S T.019 sections 4.2.9 and 5			D	Only applicable to MEOLUTs which process data from other MEOLUTs
	Transmitting Data to the MCC	n/a	n/a		V	Using MCC message log table as defined in Annex E. For C/S T.018 ELT(DT) beacons using script in section D.3.4.2.
	RF Signal Margin	n/a	n/a		D	
	Signal Sensitivity	Signal sensitivity better than 30.55 dB-Hz			D	
	Beacon Message Detection Probability	T ≥ 0.999	3.3.2.1		M	After 30 seconds
	Beacon Message Detection Probability (ELT(DT))	T > 0.99	3.3.2.2			Within any 1 minute period
	Probability of FDOA/TDOA Location	PL ≥ 0.95	3.3.2.3		M	Single burst
		PL ≥ 0.98	3.3.2.3		M	Within 30 seconds
		PL ≥ 0.98	3.3.2.3		M	Within 5 minutes
		PL ≥ 0.98	3.3.2.3		M	Within 30 minutes
	Capacity	100 beacons	n/a		D	
	Location Accuracy (nearly-static beacon)	M/N ≥ 0.95 (5 km)	3.3.2.4		M	Single Burst
		M/N ≥ 0.97 (5 km)	3.3.2.4		M	Within 30 seconds
		M/N ≥ 0.97 (1 km)	3.3.2.4		M	Within 5 minutes
		M/N ≥ 0.97 (0.1 km)	3.3.2.4		M	After 30 minutes
	Location Accuracy (slow-moving beacon)	M/N ≥ 0.95 (5 km)	3.3.2.4		M	Single Burst
		M/N ≥ 0.97 (5 km)	3.3.2.4		M	Within 30 seconds
		M/N ≥ 0.97 (1 km)	3.3.2.4		M	Within 5 minutes
	Location Accuracy (fast-moving beacon)	M/N ≥ 0.95 (TBD km)	3.3.2.4		M	Single Burst
		M/N ≥ 0.97 (TBD km)	3.3.2.4		M	Within 30 seconds
		M/N ≥ 0.97 (TBD km)	3.3.2.4		M	Within 5 minutes
	Processing Bandwidth	Center frequency in the range	n/a		D	

Section in C/S T.019	Requirement or Test	Pass Criteria	Result or Report Ref	Pass/ Fail	Method of Compliance	Declaration / Verification or Comments
		406.05 MHz ± [3] kHz				
	Expected Horizontal Error / Quality Factor	Prediction accurate 95%	3.3.2.5		M	Results reported but will not be judged as pass or fail criteria during EOC.
	Processing Anomalies	< 1x10 ⁻⁴	3.3.2.7		M	Results reported but will not be judged as pass or fail criteria during EOC. Processing anomalies that consist of a single burst from a single satellite shall be identified separately.
5.9	Combined Processing	C/S T.019 sections 4.2.9 and 5			D	Only applicable to MEOLUTs which use non-MEOSAR C/S satellites.
	Transmitting Data to the MCC	n/a	n/a		V	Using MCC message log table as defined in Annex E. For C/S T.018 ELT (DT) beacons using script in section D.3.4.2.
	RF Signal Margin	n/a	n/a		D	
	Signal Sensitivity	Signal sensitivity better than 30.55 dB-Hz			D	
	Beacon Message Detection Probability	T≥0.999	3.3.3.1		M	After 30 seconds
	Beacon Message Detection Probability (ELT(DT))	T>0.99	3.3.3.2			Within any 1 minute period
	Probability of FDOA/TDOA Location	PL≥0.95	3.3.3.3		M	Single burst
		PL≥0.98	3.3.3.3		M	Within 30 seconds
		PL≥0.98	3.3.3.3		M	Within 5 minutes
		PL≥0.98	3.3.3.3		M	Within 30 minutes
	Capacity	100 beacons	n/a		D	
	Location Accuracy (nearly-static beacon)	M/N≥0.95 (5 km)	3.3.3.4		M	Single Burst
		M/N≥0.97 (5 km)	3.3.3.4		M	Within 30 seconds
		M/N≥0.97 (1 km)	3.3.3.4		M	Within 5 minutes
		M/N≥0.97 (0.1 km)	3.3.3.4		M	After 30 minutes
	Location Accuracy (slow-moving beacon)	M/N≥0.95 (5 km)	3.3.3.4		M	Single Burst
		M/N≥0.97 (5 km)	3.3.3.4		M	Within 30 seconds
		M/N≥0.97 (1 km)	3.3.3.4		M	Within 5 minutes
	Location Accuracy (fast-moving beacon)	M/N≥0.95 (TBD km)	3.3.3.4		M	Single Burst
		M/N≥0.97 (TBD km)	3.3.3.4		M	Within 30 seconds
		M/N≥0.97 (TBD km)	3.3.3.4		M	Within 5 minutes
	Processing Bandwidth	Center frequency in the range	n/a		D	

Section in C/S T.019	Requirement or Test	Pass Criteria	Result or Report Ref	Pass/ Fail	Method of Compliance	Declaration / Verification or Comments
		406.05 MHz ± [3] kHz				
	Expected Horizontal Error / Quality Factor	Prediction accurate 95%	3.3.3.5		M	Results reported but will not be judged as pass or fail criteria during EOC.
	Processing Anomalies	$< 1 \times 10^{-4}$	3.3.3.6		M	Results reported but will not be judged as pass or fail criteria during EOC. Processing anomalies that consist of a single burst from a single satellite shall be identified separately.
5.10	Expected Horizontal Error / Quality Factor	Prediction accurate 95%	3.3.1.4		M	Results reported but will not be judged as pass or fail criteria during EOC.
5.11	Processing Anomalies	$< 1 \times 10^{-4}$	3.3.1.5		M	Results reported but will not be judged as pass or fail criteria during EOC. Processing anomalies that consist of a single burst from a single satellite shall be identified separately.

A.2 Results of Measurements

This section contains the detailed results of measurements summarized in section A.1. Each of the requirements is referred to in the report by the report reference number. The test procedure column identifies the reference in this document, where the detailed test procedure and pass/fail criteria are provided.

General part

Report Ref #	Title	Test Procedure
2.1	Operational Requirements	
2.1.1	MEOLUT Data Availability (A)	B.1

C/S T.001 Beacons

Report Ref #	Title	Test Procedure
2.2	Functional and Processing Requirements	
2.2.1	Bit Verification (test code sequence BV1 - BV2 - BV3)	D.2.1
2.2.2	Beacon Message Validation (test code sequence MV1 - MV2 - MV5 - MV6 - MV7)	D.2.1
2.2.3	Beacon Message Processing (test code sequence LP1 LP2 - LP3 - LP4)	D.2.1
2.3	Performance Requirements	
2.3.1	Stand Alone Statistics	
2.3.1.1	Beacon Detection Probability (T) Non ELT(DT) Beacons	C.2.1
2.3.1.2	Beacon Detection Probability (T) ELT(DT) Beacons	C.2.2
2.3.1.3	Probability of Location (PL)	C.2.3
2.3.1.4	Location Accuracy	C.2.4
2.3.1.5	Expected Horizontal Error / Quality Factor	C.2.6
2.3.1.6	Processing Anomalies	C.2.7
2.3.2	MEOLUT Data Exchange	
2.3.2.1	Beacon Detection Probability (T) Non ELT(DT) Beacons	C.2.1
2.3.2.2	Beacon Detection Probability (T) ELT(DT) Beacons	C.2.2
2.3.2.3	Probability of Location (PL)	C.2.3
2.3.2.4	Location Accuracy	C.2.4
2.3.2.5	Expected Horizontal Error / Quality Factor	C.2.5
2.3.2.6	TOA/FOA Measurement Accuracy	C.2.6
2.3.2.7	Processing Anomalies	C.2.7
2.3.3	Combined Non-MEOSAR Satellite Statistics	
2.3.3.1	Beacon Detection Probability (T) Non ELT(DT) Beacons	C.2.1
2.3.3.2	Beacon Detection Probability (T) ELT(DT) Beacons	C.2.2
2.3.3.3	Probability of Location (PL)	C.2.3
2.3.3.4	Location Accuracy	C.2.4
2.3.3.5	Expected Horizontal Error / Quality Factor	C.2.6
2.3.3.6	Processing Anomalies	C.2.7

C/S T.018 Beacons

Report Ref #	Title	Test Procedure
3.1	Operational Requirements (same as 2.1)	
3.2	Functional and Processing Requirements	
3.2.1	Message Recovery (test code sequence MR1 - MR2 - MR3)	D.2.2
3.2.2	Bit Verification (test code sequence BV1)	D.2.2
3.2.3	Message Association (test code sequence MA1)	D.2.2
3.3	Performance Requirements	
3.3.1	Stand Alone Statistics	
3.3.1.1	Beacon Detection Probability (T) Non ELT(DT) Beacons	C.3.1
3.3.1.2	Beacon Detection Probability (T) ELT(DT) Beacons	C.3.2
3.3.1.3	Probability of Location (PL)	C.3.3
3.3.1.4	Location Accuracy	C.3.4
3.3.1.5	Expected Horizontal Error / Quality Factor	C.3.5
3.3.1.6	Processing Anomalies	C.3.7
3.3.2	MEOLUT Data Exchange	
3.3.2.1	Beacon Detection Probability (T) Non ELT(DT) Beacons	C.3.1
3.3.2.2	Beacon Detection Probability (T) ELT(DT) Beacons	C.3.2
3.3.2.3	Probability of Location (PL)	C.3.3
3.3.2.4	Location Accuracy	C.3.4
3.3.2.5	Expected Horizontal Error / Quality Factor	C.3.5
3.3.2.6	TOA/FOA Measurement Accuracy	C.3.6
3.3.2.7	Processing Anomalies	C.3.7
3.3.3	Combined Non-MEOSAR Satellite Statistics	
3.3.3.1	Beacon Detection Probability (T) Non ELT(DT) Beacons	C.3.1
3.3.3.2	Beacon Detection Probability (T) ELT(DT) Beacons	C.3.2
3.3.3.3	Probability of Location (PL)	C.3.3
3.3.3.4	Location Accuracy	C.3.4
3.3.3.5	Expected Horizontal Error / Quality Factor	C.3.5
3.3.3.6	Processing Anomalies	C.3.7

Table A.4: MEOLUT Test Beacon Location Table

Beacon Number	Beacon Identifier	Longitude (Degrees East)	Latitude (Degrees North)	Altitude (metres)
1				
2				
3				
4				
5				
6				
7				
8				
...				
n				

Appendix 1 - Technical File**A.1 General**

This appendix defines LUT information to be provided by national Administrations for LUT commissioning. The following information is required as a minimum:

A.2 LUT Hardware Description**A.2.1 Antenna Characteristics**

- a) number and type(s) of antennas
- b) gain/temperature ratio (G/T) at 5° elevation angle above the local horizon, and actual elevation angle at which the G/T was measured
- c) operational limitations
- d) dedicated or shared
- e) site-horizon profile
- f) operational-tracking (elevation) limits
- g) downlink frequency (S/L band)

Table A.5: MEOLUT Antenna Location Table

Antenna Number	Antenna Diameter (if applicable) (m)	Longitude (Degrees East)	Latitude (Degrees North)	Altitude (m)
1				
2				
3				
4				
5				
6				
7				
8				
...				
n				

A.2.2 General LUT Indoor Equipment Description

- a) equipment complement
- b) stand alone, shared, or collocated with MCC
- c) LUT manufacturer and model number
- d) status and alarm functions
- e) location – latitude, longitude, altitude

A.2.3 General Capabilities

- a) specific processing capability
- b) spectrum monitoring capability
- c) optional capabilities

A.3 Processing

- a) specific-performance capability
- b) manufacturer specifications
- c) processing bandwidth, signal sensitivity and beacon processing capacity of each data channel

A.4 Communications Capability – internal and external

- a) primary-mode configuration
- b) backup-mode configuration

A.5 Coverage Area

Describe the Declared Coverage Area of the MEOLUT system.

The description of the Declared Coverage Area shall be accompanied, if applicable, with the following:

- 1) Satellite tracking schedule used;*
- 2) Description of DCA as:*
 - a) the latitude and longitude values of the DCA contour, and/or*
 - b) the coverage radius around the MEOLUT;*
- 3) Graphical plots of coverage should:*
 - a) Indicate the DCA,*
 - b) Provide a legend of all colors and/or scales used;*
- 4) Beacon characteristics including transmission pattern;*
- 5) Simulation time period and step size;*

- 6) *Simulation grid size;*
- 7) *List the C/S T.019 performance requirements used as criteria to determine the DCA;*
- 8) *Performance and modelling assumptions and their dependencies, such as:*
 - a) *Detection performance as a function of elevation angle or received signal strength,*
 - b) *Standard deviation (1 sigma) TOA and FOA accuracy, as a function of beacon elevation angle or received signal strength,*
 - c) *A description of methodology used for location accuracy assessment at a given grid node (e.g., statistical EHE calculation or modelling of the complete detection and location process used by the MEOLUT);*
- 9) *A description of any empirical basis for performance assumptions such as type of test sources (beacon simulator or operational beacons).*

A.6 MEOLUT Network

For a networked MEOLUT, this section shall include a list of all the other MEOLUTs that exchange data with this MEOLUT and their status (commissioned or not).

- END OF ANNEX A -

ANNEX B

STATISTICS FOR OPERATIONAL REQUIREMENTS

B.1 MEOLUT Data Availability (A)

Measurement during the commissioning period

MEOLUT data availability measures the probability of receiving complete and accurate MEOLUT data at the MCC. Availability (A) is expressed as a percentage and is calculated by dividing the amount of operational time (OT) by the time required to be in operation (OTR). The time required to be in operation (OTR), expressed in hours, is 24 times the number of days in the commissioning period inclusive of all maintenance downtime. Downtime (DT) is that period of time when the performance of the MEOLUT is below the minimum requirements specified in document C/S T.019 over the Declared Coverage Area in the configuration for which the MEOLUT was commissioned. Therefore:

$A = (OT / OTR) * 100 = (1 - (DT / OTR)) * 100$ and shall be greater than 95.

Prediction

A reliability analysis shall be performed and the results reported to verify that the MEOLUT will meet the availability requirement. The analysis shall be based on industry standard methodology using Mean Time Between Failure (MTBF) and Mean Time To Repair (MTTR) values for all the components and interfaces comprising the MEOLUT.

- END OF ANNEX B -

ANNEX C

STATISTICS FOR PERFORMANCE REQUIREMENTS

C.1 Commissioning Status

C.1.1 General

This annex describes the statistics to be provided to the Cospas-Sarsat Secretariat when commissioning a MEOLUT.

For the 406 MHz solution statistics, the report must include a list of all 406 MHz beacons used for the statistical data analysis.

C.2 C/S T.001 Beacon Statistics

C.2.1 Beacon Detection Probability (T)

Statistics will be generated using the test script identified in Annex D.3.1 to meet the following requirements:

Calculate:

$$T = N / B$$

where:

N = number of 10-minute windows for which the MEOLUT produced a valid message

B = total number of 10-minute windows (not overlapping) within the duration of the beacon activation period²

The value of T using data from all test beacons shall be 0.99 or greater.

C.2.2 ELT(DT) Beacon Detection Probability (T(DT))

Statistics will be generated using the test script identified in Annex D.3.2.1 to meet the following requirements:

Calculate:

$$T(DT) = N / B$$

where:

² A MEOLUT shall not use information from past 10-minute windows to improve beacon message detection in subsequent 10-minute windows (this might require a specific MEOLUT test set up to force a reset of the detection mechanism)

N = number of 1 minute windows for which the MEOLUT produced a ~~valid~~-complete message

B = total number of 1 minute windows within the duration of the beacon activation period

The value of T(DT) using data from all test beacons shall be 0.99 or greater.

C.2.3 Probability of DOA Location (PL)

Single Burst

Statistics will be generated using the test script identified in Annex D.3.1 to meet the following requirements:

$$PDL = M/N$$

where:

M = Number of DOA single-burst locations produced by the MEOLUT for a test beacon, within three minutes of the single burst transmission.

N = Total number of beacon messages transmitted by the test beacons

PDL shall be 0.90 or greater

PDL shall be 0.75 or greater (EOC)

Within 10 minutes

Within 20 minutes (EOC)

Statistics will be generated using the test script identified in Annex D.3.1 to meet the following requirements:

$$PDL = M/N$$

where:

M = number of beacons that produced a DOA location

N = total number of test beacons

PDL shall be 0.98 or greater.

C.2.4 Location Accuracy

Single burst solutions

Statistics will be generated using the test script identified in Annex D.3.1, or a test beacon for moving configurations to meet the following requirements:

Configuration 1: static beacon

M/N shall be greater than or equal to the following:

0.90 where:

M = number of solutions within 5 km

N = number of solutions

EOC Requirements

M/N shall be greater than or equal to the following:

0.70 where:

M = number of solutions within 5 km

N = number of solutions

M/N shall be greater than or equal to the following:

0.90 where:

M = number of solutions within 10 km

N = number of solutions

Configuration 2: nearly-static beacon (velocity = [0.4] m/s)

M/N shall be greater than or equal to the following:

0.90 where:

M = number of solutions within 5 km

N = number of solutions

Configuration 3: slow-moving beacon (velocity = [2] m/s)

M/N shall be greater than or equal to the following:

0.90 where:

M = number of solutions within TBD km

N = number of solutions

Configuration 4: fast-moving beacon (velocity > [10] m/s)

M/N shall be greater than or equal to the following:

0.90 where:

M = number of solutions within TBD km

N = number of solutions

For each configuration, a histogram for the location accuracy of the correct solutions shall be provided. The histogram shall be in 1 km increments from 0 to 20 km. All solutions with an error greater than 20 km shall be individually listed and an explanation for the error provided. The cumulative distribution function based on the histogram shall also be provided.

Solutions within 10 minutes after beacon activation

Solutions within 20 minutes after beacon activation (EOC)

Statistics will be generated using the test script identified in Annex D.3.1-2, or a test beacon for moving configurations, to meet the following requirements:

Configuration 1: static beacon

M/N shall be greater than or equal to the following:

0.95 where:

M = number of solutions within 5 km

N = number of solutions

0.98 where:

M = number of solutions within 10 km

N = number of solutions

Configuration 2 : nearly-static beacon (velocity = [0.4] m/s)

M/N shall be greater than or equal to the following:

0.95 where:

M = number of solutions within 5 km

N = number of solutions

0.98 where:

M = number of solutions within 10 km

N = number of solutions

Configuration 3 : slow-moving beacon (velocity = [2] m/s)

M/N shall be greater than or equal to the following:

0.95 where:

M = number of solutions within TBD km

N = number of solutions

0.98 where:

M = number of solutions within TBD km

N = number of solutions

Configuration 4 : fast-moving beacon (velocity > [10] m/s)

M/N shall be greater than or equal to the following:

0.95 where:

M = number of solutions within TBD km

N = number of solutions

0.98 where:

M = number of solutions within TBD km

N = number of solutions

For each configuration, a histogram for the location accuracy of the correct solutions shall be provided. The histogram shall be in 1 km increments from 0 to 20 km. All solutions with an error greater than 20 km shall be individually listed and an explanation for the error provided. The cumulative distribution function based on the histogram shall also be provided.

C.2.5 Expected Horizontal Error / Quality Factor

For each test configuration, compare each beacon DOA location produced by the MEOLUT with the known location of the test beacon to derive the actual location error.

Check that the Expected Horizontal Error is greater than the actual location error with a probability in the range 0.93-0.97 as follows:

NC = number of locations with an actual location error < Expected Horizontal Error

NL = total number of locations

$0.93 < NC/NL < 0.97$

C.2.6 TOA/FOA Measurement Accuracy

For each received beacon message:

1. Filter out messages with received C/N_0 less than 34.8 dBHz or greater than 37.8 dBHz.
2. Determine the TOA and FOA measurement error using the known beacon position.

From the beacon log data as defined in Annex E (in particular the transmission time and frequency of the transmitted bursts), calculate:

1. The standard deviation of the error of the TOA and FOA measurements for all filtered beacon messages.
2. The bias of the mean of the error of the TOA and FOA measurements.

The standard deviation of the error shall be:

Better than 25 microseconds for TOA

Better than 0.20 Hz for FOA

The bias of the mean of the error shall be:

Less than 2.5 microseconds for TOA

Less than 0.02 Hz for FOA

C.2.7 Processing Anomalies

From the beacon message data table (see section E.3), collect detected C/S T.001 beacon messages received on the transmitted test beacon frequency ± 2 kHz.

Count all messages (NM).

Count all anomalies (NA) which are defined as any beacon 15 hex ID that does not match exactly the 15 hex ID of the beacons known to transmit within the test beacon frequency ± 2 kHz (e.g., test beacons, reference beacons, etc.).

Determine the probability (PA) to detect an anomaly:

$$PA = NA / NM$$

Check that PA is less than 10^{-4} .

C.3 C/S T.018 Beacon Statistics

C.3.1 Beacon Detection Probability (T)

Statistics will be generated using the test script identified in Annex D.3.3.1 to meet the following requirements:

Calculate:

$$T = N / B$$

where:

N = number of 30-second windows for which the MEOLUT produced a ~~valid~~-complete message

B = total number of 30-second windows from the first beacon message transmission

The value of T using data from all test beacons shall be 0.999 or greater.

C.3.2 ELT(DT) Beacon Detection Probability (T(DT))

Statistics will be generated using the test script identified in Annex D.3.4.1 to meet the following requirements:

Calculate:

$$T(DT) = N / B$$

where:

N = number of 1 minute windows for which the MEOLUT produced a ~~valid~~ *complete* message

B = total number of 1 minute windows within the duration of the beacon activation period

The value of T(DT) using data from all test beacons shall be 0.99 or greater.

C.3.3 Probability of DOA Location (PL)

Single Burst

Statistics will be generated using the test script identified in Annexes *D.3.3.1, D.3.3.2, D.3.3.3 and D.3.3.4* to meet the following requirements:

$$PDL = M/N$$

where:

M = Number of DOA single-burst locations produced by the MEOLUT for a test beacon, within three minutes of the single burst transmission.

N = Total number of beacon messages transmitted by the test beacons

PDL shall be 0.95 or greater

Within 30 seconds

Statistics will be generated using the test script identified in Annex D.3.3.1 to meet the following requirements:

$$PDL = M/N$$

where:

M = number of beacons that produced a DOA location

N = total number of test beacons

PDL shall be 0.98 or greater.

Within 5 minutes

Statistics will be generated using the test script identified in Annex D.3.3.2 to meet the following requirements:

$$PDL = M/N$$

where:

M = number of beacons that produced a DOA location

N = total number of test beacons

PDL shall be 0.98 or greater.

Within 30 minutes

Statistics will be generated using the test script identified in Annex D.3.3.3 to meet the following requirements:

$$PDL = M/N$$

where:

M = number of beacons that produced a DOA location

N = total number of test beacons

PDL shall be 0.98 or greater.

C.3.4 Location Accuracy

Single burst solutions

Statistics will be generated using the test script identified in Annexes *D.3.3.1, D.3.3.2, D.3.3.3 and D.3.3.4* to meet the following requirements:

Configuration 1: static beacon

M/N shall be greater than or equal to the following:

0.95 where:

M = number of solutions within 5 km

N = number of solutions

Configuration 2: nearly-static beacon (velocity = [0.4] m/s)

M/N shall be greater than or equal to the following:

0.95 where:

M = number of solutions within 5 km

N = number of solutions

Configuration 3: slow-moving beacon (velocity = [2] m/s)

M/N shall be greater than or equal to the following:

0.95 where:

M = number of solutions within TBD km

N = number of solutions

Configuration 4: fast-moving beacon (velocity > [10] m/s)

M/N shall be greater than or equal to the following:

0.95 where:

M = number of solutions within TBD km

N = number of solutions

For each configuration, a histogram for the location accuracy of the correct solutions shall be provided. The histogram shall be in 1 km increments from 0 to 20 km. All solutions with an error greater than 20 km shall be individually listed and an explanation for the error provided. The cumulative distribution function based on the histogram shall also be provided.

Solutions within 30 seconds after beacon activation

Statistics will be generated using the test script identified in Annex D.3.3.1 to meet the following requirements:

Configuration 1: static beacon

M/N shall be greater than or equal to the following:

0.97 where:

M = number of solutions within 5 km

N = number of solutions

Configuration 2: nearly-static beacon (velocity = [0.4] m/s)

M/N shall be greater than or equal to the following:

0.97 where:

M = number of solutions within 5 km

N = number of solutions

Configuration 3: slow-moving beacon (velocity = [2] m/s)

M/N shall be greater than or equal to the following:

0.97 where:

M = number of solutions within TBD km

N = number of solutions

Configuration 4: fast-moving beacon (velocity > [10] m/s)

M/N shall be greater than or equal to the following:

0.97 where:

M = number of solutions within TBD km

N = number of solutions

For each configuration, a histogram for the location accuracy of the correct solutions shall be provided. The histogram shall be in 1 km increments from 0 to 20 km. All solutions with an error greater than

20 km shall be individually listed and an explanation for the error provided. The cumulative distribution function based on the histogram shall also be provided.

Solutions within 5 minutes after beacon activation

Statistics will be generated using the test script identified in Annex D.3.3.2 to meet the following requirements:

Configuration 1: static beacon

M/N shall be greater than or equal to the following:

0.97 where:

M = number of solutions within 1 km

N = number of solutions

Configuration 2: nearly-static beacon (velocity = [0.4] m/s)

M/N shall be greater than or equal to the following:

0.97 where:

M = number of solutions within 1 km

N = number of solutions

Configuration 3: slow-moving beacon (velocity = [2] m/s)

M/N shall be greater than or equal to the following:

0.95 where:

M = number of solutions within TBD km

N = number of solutions

Configuration 4: fast-moving beacon (velocity > [10] m/s)

M/N shall be greater than or equal to the following:

0.97 where:

M = number of solutions within TBD km

N = number of solutions

For each configuration, a histogram for the location accuracy of the correct solutions shall be provided. The histogram shall be in 0.2 km increments from 0 to 10 km. All solutions with an error greater than 10 km shall be individually listed and an explanation for the error provided. The cumulative distribution function based on the histogram shall also be provided.

Solutions within 30 minutes after beacon activation

Statistics will be generated using the test script identified in Annex D.3.3.3 to meet the following requirements:

Configuration 1: static beacon

M/N shall be greater than or equal to the following:

0.97 where:

M = number of solutions within 0.1 km

N = number of solutions

Configuration 2: nearly-static beacon (velocity = [0.4] m/s)

M/N shall be greater than or equal to the following:

0.97 where:

M = number of solutions within 0.1 km

N = number of solutions

For each configuration, a histogram for the location accuracy of the correct solutions shall be provided. The histogram shall be in 20 m increments from 0 to 1 km. All solutions with an error greater than 1 km shall be individually listed and an explanation for the error provided. The cumulative distribution function based on the histogram shall also be provided.

Solutions after 30 minutes after beacon activation

Statistics will be generated using the test script identified in Annex D.3.3.4 to meet the following requirements:

M/N shall be greater than or equal to the following:

0.97 where:

M = number of solutions within 0.1 km

N = number of solutions

A histogram for the location accuracy of the correct solutions shall be provided. The histogram shall be in 20 m increments from 0 to 1 km. All solutions with an error greater than 1 km shall be individually listed and an explanation for the error provided. The cumulative distribution function based on the histogram shall also be provided.

C.3.5 Expected Horizontal Error / Quality Factor

For each test configuration, compare each beacon DOA location produced by the MEOLUT with the known location of the test beacon to derive the actual location error.

Check that the Expected Horizontal Error is greater than the actual location error with a probability in the range 0.93-0.97 as follows:

NC = number of locations with an actual location error < Expected Horizontal Error

NL = total number of locations

$0.93 < NC/NL < 0.97$

C.3.6 TOA/FOA Measurement Accuracy

For each received beacon message:

1. Filter out messages with received C/N₀ less than [30.55] dBHz or greater than [33.55] dBHz.
2. Determine the TOA and FOA measurement error using the known beacon position.

From the beacon log data as defined in Annex E (in particular the transmission time and frequency of the transmitted bursts), calculate:

1. The standard deviation of the error of the TOA and FOA measurements for all filtered beacon messages.
2. The bias of the mean of the error of the TOA and FOA measurements.

The standard deviation of the error shall be:

Better than [1] microseconds for TOA

Better than [0.2] Hz for FOA

The bias of the mean of the error shall be:

Less than [0.2] microseconds for TOA

Less than [0.02] Hz for FOA

C.3.7 Processing Anomalies

From the beacon message data table (see section E.3), collect detected C/S T.018 beacon messages received within ± 10 Hz from the expected received test-beacon frequency³.

Count all messages (NM).

Count all anomalies (NA) which are defined as any beacon 23hex ID that does not match exactly the 23 hex ID of the beacons known to transmit within the test beacon frequency 10 Hz (e.g., test beacons, reference beacons, etc.).

Determine the probability (PA) to detect an anomaly:

$$PA = NA / NM$$

Check that PA is less than 10^{-4} .

- END OF ANNEX C -

³ The expected received test beacon frequency depends on the beacon-to-satellite geometry, and thus is a function of the satellite channel; the expected received frequency of the test beacons or beacon simulator shall be then determined for each satellite channel, to allow the collection of received messages within ± 10 Hz of the expected received test beacon frequency.

ANNEX D**BEACON SIMULATOR TEST SCRIPT****D.1 Test Messages to be Transmitted for Beacon Message Processing****D.1.1 C/S T.001 Beacons**

Test Code Sequence	Simulator	Transmit Frequency (MHz)	Date/Time (UTC)	Transmitted 30 Hex Transmitted Message (15 Hex Identifier, bits 26-85)	Number of Bit Errors				Comments
					PDF-1	BCH-1	PDF-2	BCH-2	
Bit Rate Tolerance Check (BR)									
BR1	[TBD]	406.064	[TBD]	96EEF9DA0A2BA9EB5F96F400000F19 (2DDDF3B414FFBFF)	0	0	0	0	Transmit 20 bursts at the lower end of the permissible Bit Rate Range (396 bps)
	[TBD]	406.064	[TBD]	96EEF9DA0A2BA9EB5F96F400000F19	0	0	0	0	Transmit 20 bursts at the higher end of the permissible Bit Rate Range (404 bps)
Bit Verification (BV)									
BV1	USA	406.064	[TBD]	56EE1100000000037E540000000000 (ADDC220000000000)	2	0	n/a	n/a	USA, User Test coded beacon with two (2) bit errors introduced at bits 44 and 48 in PDF-1.
BV2	USA	406.064	[TBD]	D6E10E1A4324920458B9D555555555 (ADC21C348649240)	0	0	0	0	USA, Orbitography beacon with a pattern of A01" in the long message. No bit errors
		406.064	[TBD]	D6E10E1A4324920458B9D555555555	0	0	0	0	Same as above
BV3	USA	406.064	[TBD]	D6EEAAAAAAAAAA2EA1A24E14CD2F4 (ADDD5555555554)	0	0	0	1	USA, User Test coded beacon with encoded position (38.8667, -76.933) in PDF-2. One bit error at bit 138.
Message Validation (MV)									
MV1	USA	406.064	[TBD]	D6EE1100000000265F1424DB4CEFBF (ADDC22000000004)	2	0	0	2	USA, User Test coded beacon with encoded position (38.8667, -76.933) in PDF-1. Two (2) bit errors at bits 44 and 48 in PDF-1. Two (2) bit errors at bits 133 and 134 in BCH-2

Test Code Sequence	Simulator	Transmit Frequency (MHz)	Date/Time (UTC)	Transmitted 30 Hex Transmitted Message (15 Hex Identifier, bits 26-85)	Number of Bit Errors				Comments
					PDF-1	BCH-1	PDF-2	BCH-2	
		406.064		D6EE0011100000265F1424DB4CE3BF	3	0	0	0	Three (3) bit errors at bits 52, 56 and 60 in PDF-1.
MV2	USA	406.064	[TBD]	96EE0000002729A5E22BB61B842E0A (2DDC000000FFBFF)	0	0	0	0	USA, Standard Location Protocol Test coded beacon with encoded position (38. 884, -76.931) in PDF-1 and PDF-2.
		406.064		96EE0000002729A5E22BB61B842E0A	0	0	0	0	Same as above
		406.064		96EE0000002729A5E22BB61B842E0A	0	0	0	0	Same as above
		406.064	[TBD]	96EE00000029299B91383601261D93	0	0	0	0	Position updated to (40.995, 76.851).
		406.064		96EE00000029299B91383601261D9F	0	0	0	2	Two (2) bit errors at bits 141 and 142 in BCH-2.
MV5	France	406.064	[TBD]	8E3E0000002B80372E8B968E01107B (1C7C000000FFBFF)	0	0	0	0	France, Standard Location Test Encoded position (43.559, 1.482) in PDF-1 and PDF-2. Fixed Bit 107 in error Bits 107-110=0101 instead of 1101
MV6	France	406.064	[TBD]	8E3F000000AE2017508A9BE0F380330 (1C7E00003F81FE0)	0	0	0	0	France, National Location Test Protocol Encoded position (43.559, 1.482) in PDF-1 and PDF-2 Bit 109 in error. Bit 107-109= 111 instead of 110
MV7	France	406.064	[TBD]	8E3E0780002B80372E8BB68E011E5C (PDF1: 1C7C0F000057006)	4	0	0	0	0 Transmission power 40 dBm France, Test User Four (4) bit errors at bits 46, 47,48 and 49 in PDF-1.
Location Protocol Processing (LP)									
LP1	France	406.064	[TBD]	8E3E0000007FDFFC77A376000003DD (1C7C000000FFBFF)	0	0	0	0	France, Standard Location Protocol Test coded beacon with default encoded position in PDF-1 and 0s in PDF-2.
		406.064		8E3E0000007FDFFC77A376000003DD	0	0	0	0	Same as above
		406.064		8E3E0000007FDFFC77A376000003DD	0	0	0	0	Same as above
		406.064		8E3E0000002B80372E8BB68E011E5C	0	0	0	0	Encoded position (43.559, 1.482) in PDF-1 and PDF-2
		406.064		8E3E0000002B80372E8BB68E011E5C	0	0	0	0	Same as above
		406.064		8E3E0000002B80372E8BB68E011E5C	0	0	0	0	Same as above

Test Code Sequence	Simulator	Transmit Frequency (MHz)	Date/Time (UTC)	Transmitted 30 Hex Transmitted Message (15 Hex Identifier, bits 26-85)	Number of Bit Errors				Comments
					PDF-1	BCH-1	PDF-2	BCH-2	
LP2	France	406.064	[TBD]	8E3F00000AA20175813BB60F380F6B (1C7E00003F81FE0)	0	0	0	0	Encoded position (42.559, 1.482) in PDF-1 and PDF-2
		406.064		8E3F00000AA20175813BB60F380F6B	0	0	0	0	Same as above
		406.064		8E3F00000AA20175813BB60F380F6B	0	0	0	0	Same as above
		406.064		8E3F00000AE2017508A9B60F380F6B	0	0	0	0	France, National Location Protocol Test coded beacon with encoded position (43.559, 1.482) in PDF-1 and PDF-2
		406.064		8E3F00000AE2017508A9B60F380F6B	0	0	0	0	Same as above
		406.064		8E3F00000AE2017508A9B60F380F6B	0	0	0	0	Same as above
LP3	USA	406.064	[TBD]	D6EE1F1E1E1E1E06A383EFE0FF0146 (ADDC3C3C3C3C3C0)	1	0	0	0	USA, User Test coded beacon with default encoded position in PDF-2. One (1) bit error at bit 48 in PDF-1
		406.064		D6EE1F1E1E1E1E06A383E4E14CD2BE	1	0	0	2	Encoded position updated (339.000, -76.867) in PDF-2. One (1) bit error in bit 48 in PDF-1 and two (2) bit errors at bits 141 and 143 in BCH-2.
		406.064		D6EE1F1E1E1E1E06A383E4E14CD2BE	1	0	0	2	One (1) bit error in bit 48 in PDF-1 and two (2) bit errors at bits 141 and 143 in BCH-2.
		406.064		D6EE1F1E1E1E1E06A383E4E14CD2B4	1	0	0	0	One (1) bit error in bit 48 in PDF-1.
LP4	USA	406.064	[TBD]	96EF000049C14CD260D5F608380389 (2DDE0000BF81FE0)	0	0	0	0	USA, National Location Protocol Test Coded beacon with encoded position (38. 996, -76.851).
		406.064		96EF000049C14CD260D5F608380389	0	0	0	0	Same as above.
		406.064		96EF000049814CD2E947F608380389	0	0	0	0	Encoded position (37. 996, -76.851) updated.
		406.064		96EF000049814CD2E947F60838038F	0	0	0	2	Two (2) bit errors in bits 142 and 143.
		406.064		96EF000049814CD2E947F6083803E9	0	0	0	2	Two (2) bit errors in bits 138 and 139.

D.1.2 C/S T.018 Beacons

Test Code Sequence	Simulator	Transmit Frequency (MHz)	Date/Time (UTC)	Transmitted 63 Hex Transmitted Message (23 Hex Identifier, bits 1-40 and 91-137)	Number of Bit Errors		Comments
					PDF	BCH	
Message Recovery (MR)							
MR1	[TBD]	406.05	[TBD]	000E68F4C9C6196188A047C000000000007FFFC0100C1A0096320FCF37E7840 (993C0039A3D0000000000001)	[0]	[0]	Transmit bursts with normal mode PRN and bit 42 to ‘1’
		406.05	[TBD]	000E68F4C986196188A047C000000000007FFFC0100C1A00962AC1AAAA57AE4 (993C0039A3D0000000000001)	[0]	[0]	Transmit bursts with normal mode PRN and bit 42 to ‘0’
MR2	[TBD]	406.05	[TBD]	000E68F4C986196188A047C000000000007FFFC0100C1A00962AC1AAAA57AE4 (993C0039A3D0000000000001)	[0]	[0]	Transmit bursts with self-test mode PRN and bit 42 to ‘0’
		406.05	[TBD]	000E68F4C9C6196188A047C000000000007FFFC0100C1A0096320FCF37E7840 (993C0039A3D0000000000001)	[0]	[0]	Transmit bursts with self-test mode PRN and bit 42 to ‘1’
MR3	[TBD]	406.047	[TBD]	000E68F4C986196188A047C000000000007FFFC0100C1A00962AC1AAAA57AE4 (993C0039A3D0000000000001)	[0]	[0]	Transmit 20 bursts at the lower limit of the processing bandwidth
		406.053	[TBD]	000E68F4C986196188A047C000000000007FFFC0100C1A00962AC1AAAA57AE4 (993C0039A3D0000000000001)	[0]	[0]	Transmit 20 bursts at the upper limit of the processing bandwidth
Bit Verification (BV)							
BV1	[TBD]	406.05	[TBD]	000E68F4D9861B6188E047C000020000007FFFC0100C1A00962EC1AAAA5FAE4 (993C0039A3D0000000000001)	[4]	[2]	Transmit bursts with 6 bit errors on PDF+BCH
		406.05	[TBD]	000E68F4D9861B6188E047C000020000007FFFC0100C1A00962EC1AAAA7FAE4 (993C0039A3D0000000000001)	[5]	[2]	Transmit bursts with 7 bit errors on PDF+BCH
Message Association (MA)							
MA1	[TBD]	406.05	[TBD]	000E68F4C9C6196188A047C000000000007FFFC010281A2A5623E9CFF91801C (993C0039A3D0000000000001)	[1]	[0]	1 burst with rotating fields #0
		406.05	[TBD]	000E68F4C9C61961A8A047C000000000007FFFC6A2FE1A44800B4E0B68CEB14 (993C0039A3D0000000000001)	[2]	[0]	1 burst with rotating fields #1
		406.05	[TBD]	000E68F4C9C61961A8A047C000000000007FFFCB00D0000000084F8E8D41F68 (993C0039A3D0000000000001)	[3]	[0]	1 burst with rotating fields #2
		406.05	[TBD]	000E68F4C9C61961A8A047C000000000007FFFCFAA1A0140433E59AD1B0A20 (993C0039A3D0000000000001)	[4]	[0]	1 burst with rotating fields #3

Test Code Sequence	Simulator	Transmit Frequency (MHz)	Date/Time (UTC)	Transmitted 63 Hex Transmitted Message (23 Hex Identifier, bits 1-40 and 91-137)	Number of Bit Errors		Comments
					PDF	BCH	
		406.05	[TBD]	000E68F4C9C6196188A047C00000000007FFFFFFFFFFFFFFFA5DE8EAD22C34 (993C0039A3D0000000000001)	[5]	[0]	1 Burst with rotating fields #15

D.2 Expected Processing

D.2.1 C/S T.001 Beacons

Test Code Sequence	Message to be Transmitted by MEOLUT	Encoded Location	Comments
BR1	96EEF9DA0A2BA9EB5F96F400000F19	n/a	MEOLUT sends a valid message to the MCC.
BV1	56EE0000000000037E540000000000	n/a	MEOLUT should correct two bit errors and transmit corrected message to MCC.
BV2	D6E10E1A4324920458B9D555555555	n/a	MEOLUT should transmit orbitography beacon message without error correcting the long message.
BV3	D6EEAAAAAAAAAA2EA1A24E14CD2B4	38.8667, -76.933	MEOLUT should correct error at bit 138 and transmit alert to MCC.
MV1	D6EE000000000265F1424FFFFFFFFF D6EE0011100000265F1424FFFFFFFFF	n/a	MEOLUT corrects both beacon messages (message is confirmed) and transmits corrected message to MCC with bits 107 to 144 set to all "1".
MV2	96EE0000002729A5E22BB61B842E0A	38.884, -76.931	MEOLUT sends the first complete, confirmed message to MCC and calculates Doppler position.
MV5	8E3E0000002B80372E8BBFFFFFFFFF	n/a	MEOLUT sends a confirmed invalid message with an independent location to the MCC without bit correction in PDF1+BCH1 and with bits 107 to 144 set to "1". The 15hexID of the alert message is "1C7C00000057006".
MV6	8E3F000000AE2017508A9BFFFFFFFFF	n/a	MEOLUT sends a confirmed invalid message with an independent location to the MCC without bit correction in PDF1+BCH1 and with bits 107 to 144 set to "1". The 15hexID of the alert message is "1C7E000015C402E".

Test Code Sequence	Message to be Transmitted by MEOLUT	Encoded Location	Comments
MV7	8E3E0780002B80372E8BBFFFFFFFFF	n/a	MEOLUT sends a confirmed invalid message with an independent location to the MCC without bit correction in PDF1+BCH1 and with bits 107 to 144 set to “1”. The 15hexID of the alert message is “1C7C0F000057006”.
LP1	8E3E0000002B80372E8BB68E011E5C	43.559, 1.482	MEOLUT sends updated, confirmed message for Standard Location Protocol beacon to MCC.
LP2	8E3800000AE20177ECCB360F380F6B	43.559, 1.482	MEOLUT sends updated, confirmed message for National Location Protocol beacon to MCC.
LP3	D6EE1E1E1E1E1E06A383E4FFFFFFFFF	38.855, -76.951	MEOLUT sends valid short message to MCC, however bits 113 to 144 are set to all ‘1’ because PDF-2 is not confirmed.
LP4	96EF000049C14CD260D5F608380389	38.855, -76.951	MEOLUT sends complete, confirmed message with an independent location to MCC.
	96EF000049814CD2E947F608380389	37.996, -76.851	For the third burst MEOLUT sends complete, confirmed message to MCC.

D.2.2 C/S T.018 Beacons

Test Code Sequence	Message to be Transmitted by MEOLUT	Encoded Location	Comments
MR1	000E68F4C9C6196188A047C000000000007FFFC0100C1A0096320FCF37E7840	[n/a]	MEOLUT sends a message with bit 42 to ‘1’ to the MCC and filters out message with bit 42 to ‘0’.
MR2	000E68F4C986196188A047C000000000007FFFC0100C1A00962AC1AAAA57AE4	[n/a]	MEOLUT records message with bit 42 to ‘0’ and sends it to the MCC following the self-test filtering configuration. MEOLUT filters out message with bit 42 to ‘1’.
MR3	000E68F4C986196188A047C000000000007FFFC0100C1A00962AC1AAAA57AE4	[n/a]	MEOLUT records message and sends it to the MCC.
BV1	000E68F4D9861B6188E047C000020000007FFFC0100C1A00962EC1AAAA5FAE4	[n/a]	For the first transmitted burst, MEOLUT should correct 6 bit errors and transmit corrected message. For the second transmitted burst, MEOLUT should filter out the message.
MA1	000E68F4C9C6196188A047C000000000007FFFC010281A2A5623E9CFF91801C	[n/a]	MEOLUT corrects beacon messages and transmits corrected message to MCC even if the EHE does not decrease. All 23Hex IDs are identical.

D.3 Test Messages to be Transmitted for Performance Testing

D.3.1 General Performance Script for C/S T.001 Beacons

This annex provides a description of the beacon signals that have to be transmitted in order to generate the statistics for performance requirements described in Annex C. The script is comprised of no more than 25 beacons simultaneously active and each transmitting 13 bursts. The transmissions shall *only not* use an *unallocated operational* channel of the 406 MHz frequency bandwidth.

The 15 Hex ID of beacon events are coded as follows: 9C9D0000YYD0037

- 9C9D0: fixed value for all beacon events (this is an example using a French country code),
- YY : beacon event serial 01 to 25,
- D00: fixed value for all beacon events,
- 37: signifies nominal transmission power of 37 dBm,
- *the transmitted frequency of each beacon event shall be $f_t = f_0 - 5450 + (YY - 1) * (2 * 5450) / (25 - 1)$ Hz (rounded to Hz), with f_0 being the center frequency of the beacon frequency channel used.*

The appropriate country code is to be coded within the 15 Hex ID to indicate which beacon simulator is transmitting the burst.

The script of this test shall implement beacon messages using the inverted frame synchroniser pattern.

D.3.2 C/S T.001 ELT(DT) Beacons Scripts

D.3.2.1 Performance Evaluation Script

The script is comprised of no more than 25 beacons simultaneously active and each transmitting 63 bursts, with a fixed repetition rate of 28.5 seconds and beacon event separated by 1 s. The transmissions shall not use an operational channel of the 406 MHz bandwidth, but the transmission frequency shall be spread so that it covers a range of ~~10.8-10.9~~ kHz with a resolution of ~~412.5 400~~ Hz.

The script shall be repeated for a duration of at least 4 hours to allow various geometric configurations and tracking plan.

The 15 Hex ID of beacon events are coded as follows: 1C538 0ZZYY 3FDFF,

- 1C538: fixed value for all beacon events (this is an example using a French country code 226),
- YY: beacon event serial 01 to 25,
- D: fixed value for all beacon events,
- ZZ: frequency shift factor between 0 and 27 (the transmitted frequency shall be $f_t = f_0 + ZZ \times 400412.5$ Hz, with $f_0 = 406.058600$ MHz the nominal frequency). A correspondence between ZZ and YY is given in the table below,

- 37: signifies nominal transmission power of 37 dBm.

The appropriate country code is to be coded within the 15 Hex ID to indicate which beacon simulator is transmitting the burst.

The script of this test shall implement beacon messages using the inverted frame synchronization pattern (self-test mode).

The following table give additional guidance about the test script to be used:

15 Hex ID of Beacon	Time of Transmission T0 + XX s	Transmission Power (dBm)	Frequency ZZ
1C538 00001 3FDFF	0	37	0
1C538 01402 3FDFF	1	37	14
1C538 00703 3FDFF	2	37	7
1C538 02204 3FDFF	3	37	22
1C538 00105 3FDFF	4	37	1
1C538 01506 3FDFF	5	37	15
1C538 00807 3FDFF	6	37	8
1C538 02308 3FDFF	7	37	23
1C538 00209 3FDFF	8	37	2
1C538 01610 3FDFF	9	37	16
1C538 00911 3FDFF	10	37	9
1C538 02412 3FDFF	11	37	24
1C538 00313 3FDFF	12	37	3
1C538 01714 3FDFF	13	37	17
1C538 01015 3FDFF	14	37	10
1C538 02516 3FDFF	15	37	25
1C538 00417 3FDFF	16	37	4
1C538 01818 3FDFF	17	37	18
1C538 01119 3FDFF	18	37	11
1C538 02620 3FDFF	19	37	26
1C538 00521 3FDFF	20	37	5
1C538 01922 3FDFF	21	37	19
1C538 01223 3FDFF	22	37	12
1C538 02724 3FDFF	23	37	27
1C538 00625 3FDFF	24	37	6
1C538 00001 3FDFF	28.5	37	0
1C538 01402 3FDFF	29.5	37	14
...	...	...	...

D.3.2.2 Functional Validation Script

This script aims at validating specific management of ELT(DT) alerts at MEOLUT level.
The script is composed of one beacon transmitting the following sequence:

- 24 nominal bursts with 5 second repetition rate,
- 18 nominal bursts with 10 second repetition rate,

- 6 nominal bursts with 28.5 second repetition rate,
- 10 cancellation bursts with 10 second repetition rate,
- no transmission during 2 minutes,
- 24 nominal bursts with 5 second repetition rate,
- 18 nominal bursts with 10 second repetition rate,
- 6 nominal bursts with 28.5 second repetition rate.

The transmissions shall not use an operational channel of the 406 MHz bandwidth and shall be transmitted with a nominal power of 37 dBm. Beacon message should be encoded using normal mode and ELT(DT) test protocol in bits 41 and 42.

The bits 26 to 85 of transmitted messages of the simulated beacon for nominal transmissions is coded as follow: 1C538 ABCDE LLLLL:

- 1C538: fixed value for all beacon events (this is an example using a French country code 226),
- ABCDE: fixed value for all beacon events,
- LLLLL: latitude and longitude value, changing from burst to burst, consistent with linear motion at a speed of ~~1,000~~1,200 km/h.

Additional beacon message definition:

- since the encoded location is encoded over PDF1 and PDF2 fields, both fields shall be constructed to provide a location that changes from burst to burst, consistent with horizontal motion at a speed of ~~1,000~~1,200 km/h,
- the “means of activation” bits in PDF-2 should be set to ‘01’,
- the ‘encoded altitude’ bits should be set to a constant value of ‘0010’,
- the encoded location freshness bits should be set to ‘11’.

The bits 26 to 85 of transmitted messages (using hexadecimal representation) of the simulated beacon for cancellation transmission is coded as follow: 1C538 ABCDE 7EBFA:

- 1C538: fixed value for all beacon events (this is an example using a French country code 226),
- ABCDE: fixed value for all beacon events,
- 7EBFA: fixed value for cancellation message.

Note: the fixed bits of PDF-2 for cancellation message shall be set according to the beacon cancelation message definition in document C/S T.001.

D.3.3 General Performance Script for C/S T.018 Beacons

D.3.3.1 30-Second Script

A script with the first 30 seconds of beacon activation, to evaluation the detection and location performance for single burst and at 30 seconds from beacon activation.

This annex provides a description of the beacon signals that have to be transmitted in order to generate the statistics for performance requirements described in Annex C. The script is comprised of no more than 4 beacons transmitting simultaneously 6 bursts with a repetition period of 5 seconds. These 4 beacons are reactivated continuously to achieve a sufficient amount of data to calculate accurate statistics. The event ID will increment from 1 to 100 and then restart to insure proper processing.

The 23 Hex ID of beacon events are coded as follows: ADF7 XXXX DNNN OPPD B000 001,

- ADF7: fixed value for all beacon events (this is an example using a USA country code),
- XXXX : beacon event ID 1 to 4, 5 to 8, ..., 93 to 100, 81 to 84, 1 to 4, ...,
- NNN = total number of bursts (fixed value) to be transmitted transmitted for each beacon ID during the test (15),
- PP = transmitted power,-
- *FF: transmitted frequency that shall be $f_t = f_0 - 1650 + (XXXX - 1) * (2*1650)/(100-1)$ Hz, with $f_0 = 406.05$ MHz (rounded to Hz),*
- *CRA: Chip Rate Accuracy, shall be so that $CRA = 0.6 * \sin(\pi/2 * (XXXX-1))$ chips/s,*
- *CRV: Chip Rate Variation, shall be so that $CRV = 0.6 * \sin(\pi/2 * \text{INT}((XXXX-1)/4))$ chips/s².*

The appropriate country code is to be coded within the 23 Hex ID to indicate which beacon simulator is transmitting the burst.

The script of this test shall implement beacon messages using the Test Protocol bit set.

23 Hex ID of Beacon	Time of Transmission T0 + XX s	Transmission Power (dBm)	Frequency (MHz)FF (Hz)	Chip rate accuracy CRA (chips/s)	Chip rate variation CRV (chips/s ²)
ADF7 0001 D006 OPPD B000 001	0.0	PP	406048350 406.05	0	0
ADF7 0002 D006 OPPD B000 001	1.1	PP	406048383 406.05	0.6	0
ADF7 0003 D006 OPPD B000 001	2.2	PP	406048417 406.05	0	0
ADF7 0004 D006 OPPD B000 001	3.3	PP	406048450 406.05	-0.6	0
ADF7 0001 D006 OPPD B000 001	5.0	PP	406048350 406.05	0	0
ADF7 0002 D006 OPPD B000 001	6.1	PP	406048383 406.05	0.6	0
ADF7 0003 D006 OPPD B000 001	7.2	PP	406048417 406.05	0	0
ADF7 0004 D006 OPPD B000 001	8.3	PP	406048450 406.05	-0.6	0
...	...	...	...	...	...
ADF7 0001 D006 OPPD B000 001	25.0	PP	406048350 406.05	0	0
ADF7 0002 D006 OPPD B000 001	26.1	PP	406048383 406.05	0.6	0
ADF7 0003 D006 OPPD B000 001	27.2	PP	406048417 406.05	0	0
ADF7 0004 D006 OPPD B000 001	28.3	PP	406048450 406.05	-0.6	0

23 Hex ID of Beacon	Time of Transmission T0 + XX s	Transmission Power (dBm)	Frequency (MHz)FF (Hz)	Chip rate accuracy CRA (chips/s)	Chip rate variation CRV (chips/s ²)
ADF7 0005 D006 OPPD B000 001	30.0	PP	406048483 406.05	0	0.6
ADF7 0006 D006 OPPD B000 001	31.1	PP	406048517 406.05	0.6	0.6
ADF7 0007 D006 OPPD B000 001	32.2	PP	406048550 406.05	0	0.6
ADF7 0008 D006 OPPD B000 001	33.3	PP	406048583 406.05	-0.6	0.6
...	...	...	...	...	...
ADF7 0097 D006 OPPD B000 001	745.0	PP	406051550 406.05	0	0.6
ADF7 0098 D006 OPPD B000 001	746.1	PP	406051583 406.05	0.6	0.6
ADF7 0099 D006 OPPD B000 001	747.2	PP	406051617 406.05	0	0.6
ADF7 0100 D006 OPPD B000 001	748.3	PP	406051650 406.05	-0.6	0.6
ADF7 0001 D006 OPPD B000 001	750.0	PP	406048350 406.05	0	0
ADF7 0002 D006 OPPD B000 001	751.1	PP	406048383 406.05	0.6	0
ADF7 0003 D006 OPPD B000 001	752.2	PP	406048417 406.05	0	0
ADF7 0004 D006 OPPD B000 001	753.3	PP	406048450 406.05	-0.6	0
...	...	...	...	...	...

D.3.3.2 5-Minute Script

A script with the first 5 minutes of beacon activation, to evaluation the location performance for single burst and at 5 minutes.

This annex provides a description of the beacon signals that have to be transmitted in order to generate the statistics for performance requirements described in Annex C. The script is comprised of no more than 4 beacons transmitting simultaneously 6 bursts with a repetition period of 5 seconds followed by 9 bursts with a repetition period of 30 seconds. These 4 beacons are reactivated continuously to achieve a sufficient amount of data to calculate accurate statistics. The event ID will increment from 1 to 16 and then restart to insure proper processing.

The 23 Hex ID of beacon events are coded as follows: ADF7 XXXX DNNN OPPD B000 001

- ADF7: fixed value for all beacon events (this is an example using a USA country code),
- XXXX : beacon event ID, 1 to 4, 5 to 8, 9 to 12, 13 to 16, 1 to 4, ...,
- NNN = total number of bursts (fixed value) to be transmitted for each beacon ID during the test (6),
- PP = transmitted power,-
- FF: transmitted frequency that shall be $f_t = f_0 - 1650 + (XXXX - 1) * (2*1650)/(16-1)$ Hz, with $f_0 = 406.05$ MHz (rounded to Hz),
- CRA: Chip Rate Accuracy, shall be so that $CRA = 0.6 * \sin(\pi/2 * (XXXX-1))$ chips/s,
- CRV: Chip Rate Variation, shall be so that $CRV = 0.6 * \sin(\pi/2 * \text{INT}((XXXX-1)/4))$ chips/s².

The appropriate country code is to be coded within the 23 Hex ID to indicate which beacon simulator is transmitting the burst.

The script of this test shall implement beacon messages using the Test Protocol bit set.

23 Hex ID of Beacon	Time of Transmission T0 + XX s	Transmission Power (dBm)	Frequency (MHz)FF (Hz)	Chip rate accuracy CRA (chips/s)	Chip rate variation CRV (chips/s ²)
ADF7 0001 D015 OPPD B000 001	0.0	PP	406048350 406.05	0	0
ADF7 0002 D015 OPPD B000 001	1.1	PP	406048570 406.05	0.6	0
ADF7 0003 D015 OPPD B000 001	2.2	PP	406048790 406.05	0	0
ADF7 0004 D015 OPPD B000 001	3.3	PP	406049010 406.05	-0.6	0
ADF7 0001 D015 OPPD B000 001	5.0	PP	406048350 406.05	0	0
ADF7 0002 D015 OPPD B000 001	6.1	PP	406048570 406.05	0.6	0
ADF7 0003 D015 OPPD B000 001	7.2	PP	406048790 406.05	0	0
ADF7 0004 D015 OPPD B000 001	8.3	PP	406049010 406.05	-0.6	0
...	...	...	...	...	...
ADF7 0001 D015 OPPD B000 001	25.0	PP	406048350 406.05	0	0
ADF7 0002 D015 OPPD B000 001	26.1	PP	406048570 406.05	0.6	0
ADF7 0003 D015 OPPD B000 001	27.2	PP	406048790 406.05	0	0
ADF7 0004 D015 OPPD B000 001	28.3	PP	406049010 406.05	-0.6	0
ADF7 0001 D015 OPPD B000 001	55.0	PP	406048350 406.05	0	0
ADF7 0002 D015 OPPD B000 001	56.1	PP	406048570 406.05	0.6	0
ADF7 0003 D015 OPPD B000 001	57.2	PP	406048790 406.05	0	0
ADF7 0004 D015 OPPD B000 001	58.3	PP	406049010 406.05	-0.6	0
ADF7 0001 D015 OPPD B000 001	85.0	PP	406048350 406.05	0	0
ADF7 0002 D015 OPPD B000 001	86.1	PP	406048570 406.05	0.6	0
ADF7 0003 D015 OPPD B000 001	87.2	PP	406048790 406.05	0	0
ADF7 0004 D015 OPPD B000 001	88.3	PP	406049010 406.05	-0.6	0
...	...	...	...	...	...
ADF7 0001 D015 OPPD B000 001	295.0	PP	406048350 406.05	0	0
ADF7 0002 D015 OPPD B000 001	296.1	PP	406048570 406.05	0.6	0
ADF7 0003 D015 OPPD B000 001	297.2	PP	406048790 406.05	0	0
ADF7 0004 D015 OPPD B000 001	298.3	PP	406049010 406.05	-0.6	0
ADF7 0005 D015 OPPD B000 001	300.0	PP	406049230 406.05	0	0
ADF7 0006 D015 OPPD B000 001	301.1	PP	406049450 406.05	0.6	0
ADF7 0007 D015 OPPD B000 001	302.2	PP	406049670 406.05	0	0
ADF7 0008 D015 OPPD B000 001	303.3	PP	406049890 406.05	-0.6	0
...	...	...	...	...	...
ADF7 0013 D015 OPPD B000 001	1195.0	PP	406050990 406.05	0	0
ADF7 0014 D015 OPPD B000 001	1196.1	PP	406051210 406.05	0.6	0
ADF7 0015 D015 OPPD B000 001	1197.2	PP	406051430 406.05	0	0
ADF7 0016 D015 OPPD B000 001	1198.3	PP	406051650 406.05	-0.6	0
ADF7 0001 D015 OPPD B000 001	1200.0	PP	406048350 406.05	0	0
ADF7 0002 D015 OPPD B000 001	1201.1	PP	406048570 406.05	0.6	0
ADF7 0003 D015 OPPD B000 001	1202.2	PP	406048790 406.05	0	0
ADF7 0004 D015 OPPD B000 001	1203.3	PP	406049010 406.05	-0.6	0
...	...	...	...	...	...

D.3.3.3 30-Minute Script

A script with the first 30 minutes of beacon activation, to evaluation the location performance for single burst and at 30 minutes.

This annex provides a description of the beacon signals that have to be transmitted in order to generate the statistics for performance requirements described in Annex C. The script is comprised of no more than 4 beacons transmitting simultaneously 6 bursts with a repetition period of 5 seconds followed by 59 bursts with a repetition period of 30 seconds. These 4 beacons are reactivated continuously to achieve a sufficient amount of data to calculate accurate statistics. The event ID will increment from 1 to 8 and then restart to insure proper processing.

The 23 Hex ID of beacon events are coded as follows: ADF7 XXXX DNNN 0PPD B000 001

- ADF7: fixed value for all beacon events (this is an example using a USA country code),
- XXXX : beacon event serial 1 to 4, 5 to 8, 1 to 4, ...,
- NNN = total number of bursts (fixed value) to be transmitted for each beacon ID during the test (65),
- PP = transmitted power,,-
- *FF: transmitted frequency that shall be $f_t = f_0 - 1650 + (XXXX - 1) * (2*1650)/(8-1)$ Hz, with $f_0 = 406.05$ MHz (rounded to Hz),*
- *CRA: Chip Rate Accuracy, shall be so that $CRA = 0.6 * \sin(\pi/2 * (XXXX-1))$ chips/s,*
- *CRV: Chip Rate Variation, shall be so that $CRV = 0.6 * \sin(\pi/2 * \text{INT}((XXXX-1)/4))$ chips/s².*

The appropriate country code is to be coded within the 23 Hex ID to indicate which beacon simulator is transmitting the burst.

The script of this test shall implement beacon messages using the Test Protocol bit set.

23 Hex ID of Beacon	Time of Transmission T0 + XX s	Transmission Power (dBm)	Frequency (MHz)FF (Hz)	Chip rate accuracy CRA (chips/s)	Chip rate variation CRV (chips/s ²)
ADF7 0001 D065 0PPD B000 001	0.0	PP	406048350 406.05	0	0
ADF7 0002 D065 0PPD B000 001	1.1	PP	406048821 406.05	0.6	0
ADF7 0003 D065 0PPD B000 001	2.2	PP	406049293 406.05	0	0
ADF7 0004 D065 0PPD B000 001	3.3	PP	406049764 406.05	-0.6	0
ADF7 0001 D065 0PPD B000 001	5.0	PP	406048350 406.05	0	0
ADF7 0002 D065 0PPD B000 001	6.1	PP	406048821 406.05	0.6	0
ADF7 0003 D065 0PPD B000 001	7.2	PP	406049293 406.05	0	0
ADF7 0004 D065 0PPD B000 001	8.3	PP	406049764 406.05	-0.6	0
...	...	...	...	...	...
ADF7 0001 D065 0PPD B000 001	25.0	PP	406048350 406.05	0	0
ADF7 0002 D065 0PPD B000 001	26.1	PP	406048821 406.05	0.6	0
ADF7 0003 D065 0PPD B000 001	27.2	PP	406049293 406.05	0	0
ADF7 0004 D065 0PPD B000 001	28.3	PP	406049764 406.05	-0.6	0
ADF7 0001 D065 0PPD B000 001	55.0	PP	406048350 406.05	0	0
ADF7 0002 D065 0PPD B000 001	56.1	PP	406048821 406.05	0.6	0
ADF7 0003 D065 0PPD B000 001	57.2	PP	406049293 406.05	0	0
ADF7 0004 D065 0PPD B000 001	58.3	PP	406049764 406.05	-0.6	0
ADF7 0001 D065 0PPD B000 001	85.0	PP	406048350 406.05	0	0
ADF7 0002 D065 0PPD B000 001	86.1	PP	406048821 406.05	0.6	0
ADF7 0003 D065 0PPD B000 001	87.2	PP	406049293 406.05	0	0

23 Hex ID of Beacon	Time of Transmission T0 + XX s	Transmission Power (dBm)	Frequency (MHz)FF (Hz)	Chip rate accuracy CRA (chips/s)	Chip rate variation CRV (chips/s ²)
ADF7 0004 D065 0PPD B000 001	88.3	PP	406049764 406.05	-0.6	0
...	...	...	...	...	...
ADF7 0001 D065 0PPD B000 001	1795.0	PP	406048350 406.05	0	0
ADF7 0002 D065 0PPD B000 001	1796.1	PP	406048821 406.05	0.6	0
ADF7 0003 D065 0PPD B000 001	1797.2	PP	406049293 406.05	0	0
ADF7 0004 D065 0PPD B000 001	1798.3	PP	406049764 406.05	-0.6	0
ADF7 0005 D065 0PPD B000 001	1800.0	PP	406050236 406.05	0	0.6
ADF7 0006 D065 0PPD B000 001	1801.1	PP	406050707 406.05	0.6	0.6
ADF7 0007 D065 0PPD B000 001	1802.2	PP	406051179 406.05	0	0.6
ADF7 0008 D065 0PPD B000 001	1803.3	PP	406051650 406.05	-0.6	0.6
...	...	...	...	...	...
ADF7 0005 D065 0PPD B000 001	3595.0	PP	406050236 406.05	0	0.6
ADF7 0006 D065 0PPD B000 001	3596.1	PP	406050707 406.05	0.6	0.6
ADF7 0007 D065 0PPD B000 001	3597.2	PP	406051179 406.05	0	0.6
ADF7 0008 D065 0PPD B000 001	3598.3	PP	406051650 406.05	-0.6	0.6
ADF7 0001 D065 0PPD B000 001	3600.0	PP	406048350 406.05	0	0
ADF7 0002 D065 0PPD B000 001	3601.1	PP	406048821 406.05	0.6	0
ADF7 0003 D065 0PPD B000 001	3602.2	PP	406049293 406.05	0	0
ADF7 0004 D065 0PPD B000 001	3603.3	PP	406049764 406.05	-0.6	0
...	...	...	...	...	...

D.3.3.4 After 30-Minute Script

A script with transmission as after the 30 first minutes of beacon activation, to evaluation the location performance for single burst and after 30 minutes.

This annex provides a description of the beacon signals that have to be transmitted in order to generate the statistics for performance requirements described in Annex C. The script is comprised of no more than 15 beacons transmitting simultaneously 60 bursts with a repetition period of 30 seconds. These 15 beacons are reactivated continuously to achieve a sufficient amount of data to calculate accurate statistics. The event ID will increment from 1 to 30 and then restart to insure proper processing.

The 23 Hex ID of beacon events are coded as follows: ADF7 XXXX DNNN 0PPD B000 001

- ADF7: fixed value for all beacon events (this is an example using a USA country code),
- XXXX : beacon event serial 1 to 15, 16 to 30, 1 to 15, ...,
- NNN = total number of bursts (fixed value) to be transmitted for each beacon ID during the test (60),
- PP = transmitted power,-
- FF: transmitted frequency that shall be $f_i = f_0 - 1650 + (XXXX - 1) * (2*1650)/(30-1)$ Hz, with $f_0 = 406.05$ MHz (rounded to Hz),
- CRA: Chip Rate Accuracy, shall be so that $CRA = 0.6 * \sin(\pi/2 * (XXXX-1))$ chips/s,
- CRV: Chip Rate Variation, shall be so that $CRV = 0.6 * \sin(\pi/2 * \text{INT}((XXXX-1)/4))$ chips/s².

The appropriate country code is to be coded within the 23 Hex ID to indicate which beacon simulator is transmitting the burst.

The script of this test shall implement beacon messages using the Test Protocol bit set.

23 Hex ID of Beacon	Time of Transmission T0 + XX s	Transmission Power (dBm)	Frequency (MHz) FF (Hz)	Chip rate accuracy CRA (chips/s)	Chip rate variation CRV (chips/s ²)
ADF7 0001 D060 OPPD B000 001	0	PP	406048350 406.05	0	0
ADF7 0002 D060 OPPD B000 001	2	PP	406048464 406.05	0.6	0
ADF7 0003 D060 OPPD B000 001	4	PP	406048578 406.05	0	0
...	...	...	...	...	...
ADF7 0015 D060 OPPD B000 001	28	PP	406049943 406.05	0	-0.6
ADF7 0001 D060 OPPD B000 001	30	PP	406048350 406.05	0	0
...	...	...	...	...	...
ADF7 0001 D060 OPPD B000 001	1770	PP	406048350 406.05	0	0
...	...	...	...	...	...
ADF7 0015 D060 OPPD B000 001	1798	PP	406049943 406.05	0	-0.6
ADF7 0016 D060 OPPD B000 001	1800	PP	406050057 406.05	-0.6	-0.6
...	...	...	...	...	...
ADF7 0030 D060 OPPD B000 001	1828	PP	406051650 406.05	0	-0.6
...	...	...	...	...	...
ADF7 0030 D060 OPPD B000 001	3598	PP	406051650 406.05	0	-0.6
ADF7 0001 D060 OPPD B000 001	3600	PP	406048350 406.05	0	0
...	...	...	...	...	...

D.3.4 Scripts for C/S T.018 ELT(DT) Beacons

D.3.4.1 Performance Evaluation Script

The script is comprised of no more than 25 beacons simultaneously active and each transmitting 63 bursts, with a fixed repetition rate of 28.5 seconds and beacon events are separated by 1 s. The transmission frequency shall be spread around 406.05 MHz so that it covers a range of ~~3-23.3~~ kHz with a resolution of ~~400-412.5~~ Hz.

The script shall be repeated for a duration of at least 4 hours to allow various geometric configurations and tracking plan.

The 23 Hex ID of beacons events are coded as follows: 9C54 00YY DNNN OPPD BZZ0 001

- 9C54: fixed value for all beacon events (this is an example using a French country code 226),
- YY : beacon event serial 01 to 25,
- D: fixed value for all beacon events,
- NNN: total number of transmitted burst (fixed value) to be transmitted for each beacon ID during the test (63),
- PP: transmitted power,

- ZZ: frequency shift factor, between 0 and 8 (the transmitted frequency shall be $f_t = f_0 - 1600 - 1650 + ZZ \times 412.5 - 400$ Hz, with $f_0 = 406.05$ MHz). A correspondence between ZZ and YY is given in the table below.

The appropriate country code is to be coded within the 23 Hex ID to indicate which beacon simulator is transmitting the burst.

The script of this test shall implement beacon messages using the normal spreading sequence with the Test Protocol bit 43 set to 1.

The following table give additional guidance about the test script to be used:

23 Hex ID	Time of Transmission T0 + XX s	Transmission Power (dBm)	Frequency ZZ
9C54 0001 D063 0PPD B000 001	0	PP	0
9C54 0002 D063 0PPD B080 001	1		8
9C54 0003 D063 0PPD B010 001	2		1
9C54 0004 D063 0PPD B070 001	3		7
9C54 0005 D063 0PPD B020 001	4		2
9C54 0006 D063 0PPD B060 001	5		6
9C54 0007 D063 0PPD B030 001	6		3
9C54 0008 D063 0PPD B050 001	7		5
9C54 0009 D063 0PPD B000 001	8		0
9C54 0010 D063 0PPD B080 001	9		8
9C54 0011 D063 0PPD B010 001	10		1
9C54 0012 D063 0PPD B070 001	11		7
9C54 0013 D063 0PPD B020 001	12		2
9C54 0014 D063 0PPD B060 001	13		6
9C54 0015 D063 0PPD B030 001	14		3
9C54 0016 D063 0PPD B050 001	15		5
9C54 0017 D063 0PPD B000 001	16		0
9C54 0018 D063 0PPD B080 001	17		8
9C54 0019 D063 0PPD B010 001	18		1
9C54 0020 D063 0PPD B070 001	19		7
9C54 0021 D063 0PPD B020 001	20		2
9C54 0022 D063 0PPD B060 001	21		6
9C54 0023 D063 0PPD B030 001	22		3
9C54 0024 D063 0PPD B050 001	23		5
9C54 0025 D063 0PPD B040 001	24		4
9C54 0001 D063 0PPD B000 001	28.5		0
9C54 0002 D063 0PPD B080 001	29.5		8
...	...	...	...

D.3.4.2 Functional Validation Script

This script aims at validating specific management of ELT(DT) alerts at MEOLUT level.

The script is composed of one beacon transmitting the following sequence:

- 24 nominal bursts with 5 second repetition rate,
- 18 nominal bursts with 10 second repetition rate,
- 6 nominal bursts with 28.5 second repetition rate,
- 10 cancellation bursts with 10 second repetition rate,
- no transmission during 2 minutes,
- 24 nominal bursts with 5 second repetition rate,
- 18 nominal bursts with 10 second repetition rate,
- 6 nominal bursts with 28.5 second repetition rate.

The transmissions shall be done at 406.05 MHz.

The Hex ID of the simulated beacon for transmissions is coded as follow: 9C54 0000 D000 000D B000 001:

- 9C54: fixed value for all beacon events (this is an example using a French country code 226)

Additional beacon message definition:

- the encoded latitude/longitude in the main field of the message shall be constructed in the beacon message, consistent with horizontal beacon motion at ~~1,000~~1,200 km/h,
- the rotating field shall be #1 with:
 - 'Time of last encoded location' should be all ones,
 - altitude of encoded location' should be 0 m,
 - triggering event should be '1000',
 - GNSS status should be 2D,
 - remaining battery capacity should be '11'.

The script of this test shall implement beacon messages using the normal spreading sequence with the Test Protocol bit 43 set to 1. For cancellation transmissions, the rotating field shall be #15 and the "method of deactivation" field shall be set to '01'.

- END OF ANNEX D -

ANNEX E**DATA FORMAT****E.1 General**

This annex describes the data format to be provided in electronic files using ASCII format to the Cospas-Sarsat Secretariat when commissioning a MEOLUT. The data is to be provided in a comma separated value (csv) format, and each field shall include an entry. If there is no data for any given field, then the field can be empty. All solution data used in the commissioning testing shall be provided.

A description of the fields is provided below:

Field	Relative position of the data
Description	Description of the information provided
Detailed Format	Guidance on how the data should be provided
Type	C - Character, N - Numeric and L - Logical
Width	The total number of characters for the field
Dec	The total number of digits after the decimal
MF#	Message Field as described in document C/S A.002 (SID)
Comments	

E.2 MEOLUT Satellite Tracking

The satellites tracked by the MEOLUT during the commissioning test period shall be documented using the following format.

Field	Description	Detailed Format	Type	Width	Dec	MF#	Comments
1	LUT ID	xxxx	N	4		11	
2	Antenna ID	xx	N	2		71	
3	Satellite ID	xxx	N	3		6	
4	AOS_Time (Acquisition of Signal) (UTC)	yyyy-mm-dd hh:mm:ss.xxx	C	23			
5	LOS_Time (Loss of Signal) (UTC)	yyyy-mm-dd hh:mm:ss.xxx	C	23			

E.3 Beacon Message Data

All beacon valid messages produced by the LUT for C/S T.001 and C/S T.018 beacons during the commissioning test period will be documented using the following format.

Field	Description		Detailed Format	Type	Width	Dec	MF#	Comments
1	Burst number (as collected)			N				
2	Raw/Full message (36 Hex) for C/S T.001 beacon, or raw/full message (63 Hex) for C/S T.018 beacon		h...h	C	36, or 63		77 for C/S T.001 beacons	Note 1
3	Beacon ID 15 Hex for C/S T.001 beacon, or 23 Hex for C/S T.018 beacon		h..h	C	15, or 23		22 for C/S T.001 beacons, or 92 for C/S T.018 beacons	
4	Time of beacon burst received (UTC)		yyyy-mm-dd hh:mm:ss.xxx	C	23	3		
5	FOA (Hz)		nnnnnnnnn.nnn	N	13	3	68	
6	Freq Offset (Hz)		snnnnn.nnn	N	10	3	70	
7	TOA (UTC)		yyyy-mm-dd hh:mm:ss.xxxxxxxxxx	C	29		67	
8	Time Offset (s)		n.nnnnnnnnn	N	11	9	69	
9	C/N ₀ (dB/Hz)		nn.n	N	4	2	72	
10	Bit rate (bps)		nnn.nnn	N	7	3	73	
11	Antenna ID		nn	N	2		71	
12	Spacecraft ID		nnn	N	3		6	
13	Satellite position (km)	X	snnnnn.nnnn	N	11	4	75	Note 2
14		Y	snnnnn.nnnn	N	11	4		
15		Z	snnnnn.nnnn	N	11	4		
16	Satellite velocity (km/s)	X	snnn.nnnnnn	N	11	6	76	Note 3
17		Y	snnn.nnnnnn	N	11	6		
18		Z	snnn.nnnnnn	N	11	6		

Notes:

- 1 For C/S T.018 beacons, field 2 is composed of the 250-bit C/S T.018 raw/full message, which shall be left padded with zeros to form a 63 Hex character.
- 2 Associated satellite position data and associated reference frame (preferably Earth-Centered Earth-Fixed frame) may be provided or optionally disclosed.
- 3 Associated satellite velocity data and associated reference frame (preferably Earth-Centered Earth-Fixed frame) may be provided or optionally disclosed.

E.4 LUT Database for Solution Data

All the location and detection solutions produced by the LUT during the commissioning test period shall be documented according to the format defined. If no location is available, the location fields (e.g., latitude, longitude, DOP etc.) would be empty.

Field	Description	Detailed Format	Type	Width	Dec	MF#	Comments
1	Solution ID		N				Note 1
2	LUTID	nnnn	N	4		2	
3	Time stamp of 1 st burst used for location (UTC)	yyyy-mm-dd hh:mm:ss.xxx	C	23		14a	
4	Time stamp of last burst used for location (UTC)	yyyy-mm-dd hh:mm:ss.xxx	C	23		14b	
5	Time of location computation or time solution sent (UTC)	yyyy-mm-dd hh:mm:ss.xxx	C	23		3	
6	Beacon ID 15 Hex for C/S T.001 beacon, or 23 Hex for C/S T.018 beacon	h..h	C	15, or 23		22, or 92	
7	Detection Frequency	406.nnnnnnn	N	10	6	49	
8	Full message 36 Hex for C/S T.001 beacon, or 63 Hex for C/S T.018 beacon	h...h	C	36, or 63		77, or [90]	[note for MF#90]
9	Number of bursts used	nn	N	2		80	Note 2
10	Data used T/F/D	aa	C	2			Note 3
11	Antenna IDs	nn ... nn	N			71	Note 4
12	Number of packets used to derive the solution	nnn	N	2		88	Note 5
13	Number of satellites used to derive the solution	nnn	N	3		Derived from MF#14	
14	Satellite IDs	nnn ... nnn	N			83	Note 6
15	JDOP	nn.nn	N	5	2		
16	Expected Horizontal Error	nnn.nn	N	7	3	89	
17	Location methodology	a	C	1			Note 7
18	Latitude(degree)	snn.nnnnnn	M	9	5	25	Note 8
19	Longitude (degree)	snnn.nnnnnn	N	10	5	26	Note 9
20	Altitude (km)	nn.nnnnnnn	N	9	6	82	
21	Location error (km)	nnnn.nnn	N	8	3		Note 10
22	Comment		C				

Notes:

- 1 This number has not to be generated by the LUT.
- 2 Number of bursts used in location computation.
- 3 T – TDOA only, F – FDOA only, D – TDOA/FDOA.
- 4 Empty or a list of antenna IDs separated by spaces.
- 5 A packet is a pair of TOA/FOA measurements from a specific satellite/antenna combination (channel) for a beacon burst.
- 6 A list of satellite IDs separated by spaces.
- 7 As available, location methodology for the generation of the computed location (e.g., median, mean, weighted average) may be provided or optionally disclosed, but should always be recorded.
- 8 Latitude to be provided in decimal and $\pm$ format (i.e., without North or South indication).
- 9 Longitude to be provided in decimal and $\pm$ format (i.e., without East or West indication).
- 10 Can be empty.

E.5 MCC message log table

All the location and detection solutions produced by the LUT and intended to be sent to the MCC during the commissioning test period shall be documented according to the same format provided in section E.4. If no location is available, the location fields (e.g., latitude, longitude, DOP etc.) would be empty.

SIT messages listed in Table 3.1 of document C/S T.019 shall be collected and provided as part of the data package.

E.6 Beacon Database Description

Field	Description	Detailed Format	Type	Width	Dec	MF#	Comments
1	Beacon Number	nn	N	2			
2	Location		C	11			
3	Beacon ID 15 Hex for C/S T.001 beacon, or 23 Hex for C/S T.018 beacon	h..h	C	15, or 23			
4	Beacon latitude	snn.nnnnn	N	9	5	25	
5	Beacon longitude	snnn.nnnnn	N	10	5	26	
6	Beacon altitude (km)	snn.nnn	N	7			
7	Type of Beacon		C	4			
8	Country Code		C	3			
9	Activation Time	yyyy-mm-dd hh:mm:ss.xxx	N	23			
10	Deactivation Time	yyyy-mm-dd hh:mm:ss.xxx	N	23			

Field	Description	Detailed Format	Type	Width	Dec	MF#	Comments
11	Actual Time “On”	yyyy-mm-dd hh:mm:ss.xxx	N	23			
12	Actual Time “Off”	yyyy-mm-dd hh:mm:ss.xxx	N	23			
	Comments		C				

E.7 Beacon Test Script Log

All the beacon scripts used during the LUT commissioning test period shall be documented according using the following format.

Field	Description	Detailed Format	Type	Width	Dec	Comments
1	Transmission Time (UTC)	yyyy-mm-dd hh:mm:ss.xxxxxxxxxx	N	29		
2	Beacon ID 15 Hex for C/S T.001 beacon, or 23 Hex for C/S T.018 beacon	h.h	C	15, or 23		
3	Full message 36 Hex for C/S T.001 beacon, or 63 Hex for C/S T.018 beacon	h...h	C	36, or 63		Note 1
4	Transmitted power	nn	N	2		dBm
5	Transmitted frequency	nnn.nnnnnn	N	10		MHz
6	Beacon latitude	snn.nnnnn	N	9	5	deg
7	Beacon longitude	snnn.nnnnn	N	10	5	deg
8	Beacon altitude	nnnn	N	4		m
9	Comments		C			

Note 1: 250-bit C/S T.018 raw/full messages in field 3 shall be left padded with zeros to form a 63 Hex character string

- END OF ANNEX E -

ANNEX F

MEOLUT COMMISSIONING - PRINCIPLES AND POLICIES

F.1 References

The Cospas-Sarsat Council approved the general principles of its commissioning policy for MEOLUTs, provided hereunder in sections F.2, F.3 and F.4.

F.2 General

The following principles govern the commissioning of Cospas-Sarsat Ground Segment equipment:

- F.2.1** A State which has notified its association with the Cospas-Sarsat Programme as a Ground Segment Provider assumes the responsibility "to adhere to the technical specifications and operating procedures set by the Council for the purpose of ensuring adequate System performance" and "to provide, as agreed with the Council, appropriate performance data in order to confirm compatibility of its Ground Segment equipment with the System" (section 3.1 of the Letter of Notification).
- F.2.2** Cospas-Sarsat performance specification and design guidelines for MEOLUTs and MCCs are defined in documents C/S T.019 and C/S A.005, respectively.
- F.2.3** Cospas-Sarsat criteria and test methods for verifying that MEOLUTs and MCCs meet these standards are defined in documents C/S T.020 and C/S A.006, respectively.
- F.2.4** The responsible Agency or Administration installing and planning to operate a new MEOLUT or MCC shall plan and conduct appropriate tests, in accordance with the applicable Cospas-Sarsat standards, which may form part of its own acceptance testing.
- F.2.5** A commissioning report, including the results of the commissioning tests defined by Cospas-Sarsat, shall be submitted to the Cospas-Sarsat Secretariat, for review by the Joint Committee. The commissioning report must be submitted six weeks prior to the Joint Committee meeting. Reports submitted less than six weeks in advance will be considered at the subsequent Joint Committee meeting.
- F.2.6** After review of the commissioning report, the Joint Committee makes appropriate recommendations to the Cospas-Sarsat Council. Formal commissioning is recorded at the subsequent Council meeting, after approval of the Joint Committee recommendation by the Council.
- F.2.7** This commissioning and reporting procedure shall be implemented by all Cospas-Sarsat Ground Segment Providers, including Parties to the International Cospas-Sarsat Programme

Agreement, for commissioning new MEOLUTs and MCCs or new equipment or functions which have a significant impact on the Cospas-Sarsat Ground Segment operation.

- F.2.8** The cost of implementing the commissioning procedure and reporting to the Cospas-Sarsat Joint Committee is borne by the operating Agency or Administration installing the equipment to be commissioned.
- F.2.9** Ground Segment equipment will be commissioned into the Cospas-Sarsat System only if the formal association of the MEOLUT and MCC operator with the Cospas-Sarsat Programme has been notified in accordance with the standard procedure, unless otherwise agreed by the Council.

F.3 LUT Commissioning

The following principles govern the implementation of the Cospas-Sarsat MEOLUT Commissioning Standard (C/S T.020):

- F.3.1** The implementation of the commissioning procedure defined in document C/S T.020 is the responsibility of the operating Agency or Administration.
- F.3.2** The operating Agency or Administration will be responsible for equipment which may be required for performing the commissioning tests.
- F.3.3** A MEOLUT may be commissioned as a stand-alone system, independent of an MCC. However, MEOLUT commissioning may take place at the same time that the associated MCC is being commissioned.
- F.3.4** The MEOLUT/MCC interface is part of the MEOLUT commissioning. Therefore, it shall be tested as part of the MEOLUT commissioning procedure.
- F.3.5** If the test results in the commissioning report submitted by the operating Agency or Administration do not demonstrate full compliance document C/S T.019, corrective action shall be taken.
- F.3.6** If the test results in the commissioning report submitted by the operating Agency or Administration do demonstrate full compliance with document C/S T.019, the alert data derived from the new MEOLUT can be immediately used by the associated MCC for distribution in accordance with document C/S A.001.
- F.3.7** Once the alert data derived from the new MEOLUT begins to be used by the associated MCC, a change of System status shall be notified to all MCCs by the associated MCC, in accordance with the procedure of document C/S A.001.
- F.3.8** The Joint Committee shall, at its following meeting, review the commissioning report and recommend to the Cospas-Sarsat Council, as appropriate, formal commissioning of the MEOLUT.

F.4 Status of the Cospas-Sarsat Ground Segment

- F.4.8** After their commissioning, MEOLUTs are listed and described as appropriate in the applicable System documents and the “Cospas-Sarsat System Data” document.
- F.4.8** The Cospas-Sarsat MEOLUTs commissioned in the Cospas-Sarsat System shall be listed on the Cospas-Sarsat website www.cospas-sarsat.int.

- END OF ANNEX F -

This document has been superseded
by a later version

ANNEX G

GUIDELINES FOR INTEGRATION OF NEW MEOLUTS IN THE COSPAS-SARSAT SYSTEM

The introduction of new MEOLUTs in the Cospas-Sarsat System is supervised by the Technical Working Group (TWG) of the Cospas-Sarsat Joint Committee whose objectives include:

- a) the improvement of the overall performance of the Cospas-Sarsat Ground Segment; and
- c) the technical control of the development of the Cospas-Sarsat LUTs.

The guidelines hereunder, and Figure G.1, provide procedures for integrating a new MEOLUT into the Cospas-Sarsat Ground Segment.

1. Installation of New Equipment - The new MEOLUT(s) equipment should be sited to allow the widest possible horizon and to maximize coverage of national SRRs as well as the entire Cospas-Sarsat System. The location of the MEOLUT(s) should also allow for reliable communications with the associated MCC.
2. Ground Segment Description and MEOLUT Coverage - The national Administration should ensure that a description of the new MEOLUT(s) along with (1) coordinates, (2) address, (3) frequencies and (4) MEOLUT antenna masks are provided to the Cospas-Sarsat Secretariat.

The national Administration should also ensure that their MEOLUT(s) are properly registered with the International Telecommunications Union (ITU). The forms provided in Annex H to this document should be completed and forwarded to ITU through the appropriate national authorities.

3. Commissioning Test - For new Ground Segment Providers, the MEOLUT Commissioning tests may be scheduled to coincide with the MCC commissioning tests. In any case, the MEOLUT should be connected to the MCC and tested in its operational configuration, including optional capabilities, if used. However, statistics for optional capabilities shall be collected separately.

The MEOLUT Operator should ensure that test beacon(s) capable of transmitting the test code sequences contained in Annex D is (are) available for the commissioning test, or the MEOLUT Operator should coordinate with beacon simulator providers in the USA or France for the transmission of such code sequences. If test beacons/simulators cannot be used during the commissioning test, the MEOLUT Operator should ensure that an alternative method of confirming compliance is identified.

The relevant sections of this document describe the operational, functional and processing, and performance requirements to be tested. During the test, the data from the MEOLUT(s) should be transmitted to the associated MCC, however, the data should be suppressed by the MCC and not transmitted within the Cospas-Sarsat System.

4. Preparation of Commissioning Report - The results of the tests, along with the proper declarations and verifications for items not specifically tested, should be documented in a commissioning report. Annex A to this document contains the format of the commissioning report.

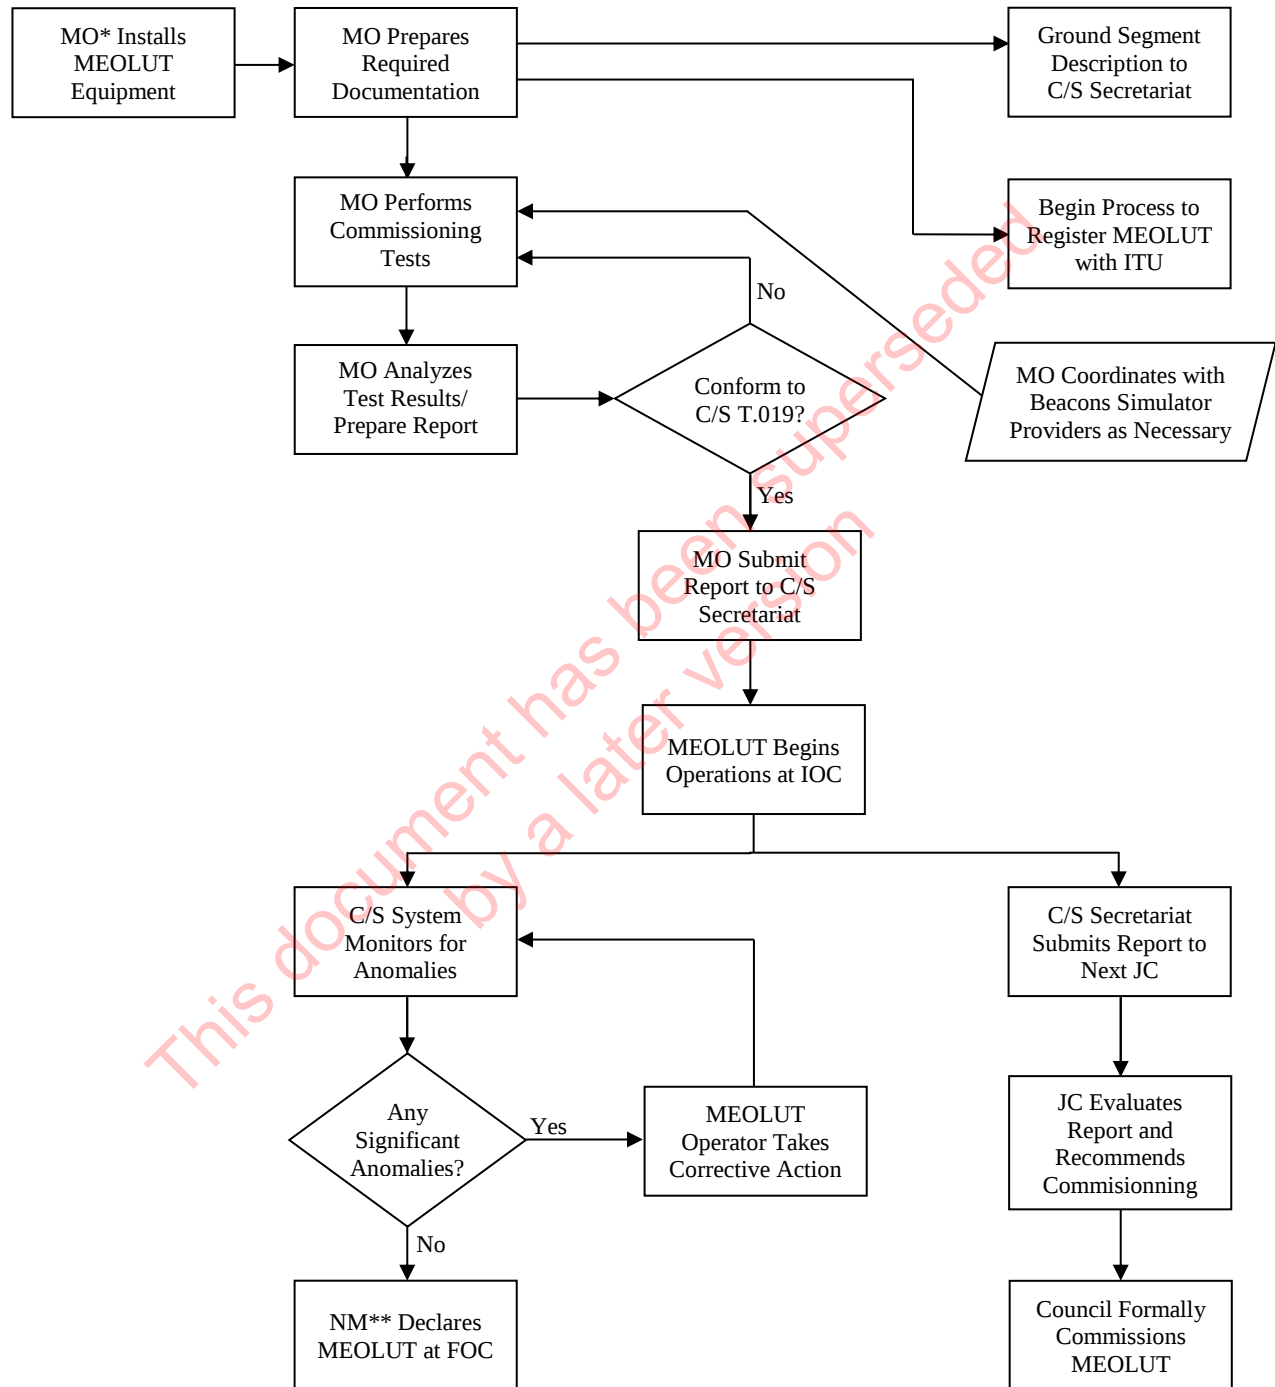
The commissioning report should include as a minimum the information requested in this document and in the format contained in Annex A. In addition, information to explain or clarify results should also be included in the commissioning report.

Any anomaly, or failure to meet a requirement, observed during the commissioning test should be corrected and the requirement re-tested. After the MEOLUT satisfies the requirements of document C/S T.019, the completed commissioning report should be submitted by the national Administration to the Cospas-Sarsat Secretariat.

5. Initial Operational Capability (IOC) - If the commissioning test has been completed successfully, and the commissioning report has been forwarded to the Cospas-Sarsat Secretariat, the MEOLUT may begin operations in an IOC status. However, the MEOLUT cannot reach IOC status prior to the MCC IOC date if the associated MCC is also in the commissioning process. The national Administration, through its associated MCC, should notify all Ground Segment Operators of a MEOLUT's IOC status via a System Status message.

The IOC phase allows a thorough review of the MEOLUT performance. However a MEOLUT shall not remain in an IOC phase for more than one year. MEOLUTs that have not reached FOC within one year will be considered not operational, and documented as "Under Development". To regain IOC status the MEOLUT will require a retest of the elements which prevented it from reaching FOC. The MEOLUT then must operate again in an IOC phase prior to reaching FOC. All Cospas-Sarsat Ground Segment Operators should monitor the data from new MEOLUTs for any significant anomalies that could impact Cospas-Sarsat operations.

6. Full Operational Capability (FOC) - If after 90 days of operation in an IOC state no anomalies are detected in the performance of the MEOLUT, the MEOLUT should be declared at FOC by the appropriate nodal MCC. The transition of a MEOLUT from an IOC status to a FOC status ensures that the MEOLUT performs to Cospas-Sarsat standards and does not negatively impact System operations.
7. Formal Commissioning - The Joint Committee reviews the commissioning report and, pending additional details or explanations, submits the report to the Cospas-Sarsat Council. The Council accepts the commissioning report and the MEOLUT is formally commissioned in the Cospas-Sarsat Ground Segment.

Figure G.1: Overview of MEOLUT Integration

* MO: MEOLUT operator

** NO: Nodal MCC

ANNEX H**GUIDELINES FOR REGISTRATION OF NEW MEOLUTS WITH ITU**

[This Annex shall be taken from the corresponding Annex of document C/S T.005 (LEOLUT Commissioning Standard) or document C/S T.010 (GEOLUT Commissioning Standard), with the appropriate changes made to ensure that all references to LEOLUTs or GEOLUTs are changed to MEOLUTs.]

- END OF ANNEX H -

- END OF DOCUMENT -

This document has been superseded
by a later version

This document has been superseded
by a later version

Cospas-Sarsat Secretariat
1250 Boul. René-Lévesque West, Suite 4215, Montreal (Quebec) H3B 4W8 Canada
Telephone: +1 514 500 7999 / Fax: +1 514 500 7996
Email: mail@cospas-sarsat.int
Website: www.cospas-sarsat.int
