
COSPAS-SARSAT MEOLUT COMMISSIONING STANDARD

C/S T.020
Issue 2 – Revision 10
October 2025

This document is provided as a complement to the final clean version of the document. In case of discrepancy between this marked-up version and the clean final version, the information in the clean final version shall prevail.

NOTE

This document includes requirements yet to be determined or to be confirmed for beacons moving at velocities between 5 and 10 m/s (i.e., “slow-moving medium speed”) and above 10 m/s (“fast-moving” beacon). The values of these requirements are labelled as to be confirmed (TBC) or appear in square brackets [] and their determination is ongoing.



COSPAS-SARSAT MEOLUT
COMMISSIONING STANDARD

HISTORY

<u>Issue</u>	<u>Revision</u>	<u>Date</u>	<u>Comments</u>
1	-	December 2015	Approved by the Cospas-Sarsat Council (CSC-55)
1	1	December 2016	Approved by the Cospas-Sarsat Council (CSC-57)
2	-	February 2018	Approved by the Cospas-Sarsat Council (CSC-59)
2	1	June 2018	Approved by the Cospas-Sarsat Council (CSC-60)
2	2	February 2019	Approved by the Cospas-Sarsat Council (CSC-61)
2	3	November 2019	Approved by the Cospas-Sarsat Council (CSC-62)
2	4	March 2021	Approved by the Cospas-Sarsat Council (CSC-64)
2	5	June 2021	Approved by the Cospas-Sarsat Council (CSC-65)
2	6	March 2022	Approved by the Cospas-Sarsat Council (CSC-66)
2	7	November 2022	Approved by the Cospas-Sarsat Council (CSC-67)
2	8	October 2023	Approved by the Cospas-Sarsat Council (CSC-69)
2	9	October 2024	Approved by the Cospas-Sarsat Council (CSC-71)
2	10	October 2025	Approved by the Cospas-Sarsat Council (CSC-73)

TABLE OF CONTENTS

	Page
History.....	i
Table of Contents	ii
List of Figures	iii
List of Tables	iii
1. INTRODUCTION	1-1
1.1 Purpose	1-1
1.2 Scope	1-1
1.3 Reference Documents.....	1-1
2. MEOLUT COMMISSIONING.....	2-1
2.1 General 2-1	
2.2 Pre-Test Requirements	2-1
2.3 Test Data Collection.....	2-2
2.4 Frequency Registration.....	2-3
2.5 Data Collection Limitation.....	2-3
2.6 Reference System.....	2-4
2.7 Submission of Results	2-4
2.8 MEOLUT Commissioning and Integration.....	2-4
2.9 MEOLUT/MCC Interface	2-4
2.10 Confirmation of Requirements	2-4
2.11 Change of Configuration	2-5
2.11.1 Location of MEOLUT	2-5
2.11.2 Modification to MEOLUT Configuration (eg, Addition of Satellite Channels, Addition of Data Sources or Significant Change in the Processing).....	2-6
3. EVALUATION OF OPERATIONAL REQUIREMENTS	3-1
3.1 MEOLUT Data Availability.....	3-1
3.2 Data Requirements	3-1
3.3 Satellite Tracking and Visibility Capability	3-1
3.4 Status and Alarm	3-1
3.5 RF Radiation and Emissions	3-1
3.6 Data Archiving	3-1
4. EVALUATION OF FUNCTIONAL AND PROCESSING REQUIREMENTS	4-1
4.1 Functional Requirements.....	4-1

4.1.1	Antenna and RF Subsystems	4-1
4.1.2	Time and Frequency Reference Subsystem.....	4-1
4.1.3	Satellite Tracking Subsystem.....	4-1
4.1.4	MCC Interface	4-1
4.2	Beacon Message Processing.....	4-1
5.	EVALUATION OF PERFORMANCE REQUIREMENTS	5-1
5.1	Data Collection Test.....	5-1
5.1.1	Test Beacons	5-1
5.1.2	Satellite Tracking Schedule	5-2
5.2	Detection and Location Statistics	5-2
5.3	Detection and Location Data.....	5-2

LIST OF ANNEXES

ANNEX A MEOLUT COMMISSIONING REPORT

ANNEX B STATISTICS FOR OPERATIONAL REQUIREMENTS

ANNEX C STATISTICS FOR PERFORMANCE REQUIREMENTS

ANNEX D BEACON SIMULATOR TEST SCRIPT

ANNEX E DATA FORMAT

ANNEX F MEOLUT COMMISSIONING - PRINCIPLES AND POLICIES

**ANNEX G GUIDELINES FOR INTEGRATION OF NEW MEOLUTS IN THE
COSPAS-SARSAT SYSTEM**

ANNEX H GUIDELINES FOR REGISTRATION OF NEW MEOLUTS WITH ITU

LIST OF FIGURES

Figure C.1: (Location Error)/EHE Cumulative Distribution	C-7
Figure G.1: Overview of MEOLUT Integration.....	G-3

LIST OF TABLES

Table A.1: MEOLUT Commissioning Summary Data Table (General Part).....	A-2
Table A.2: MEOLUT Commissioning Summary Data Table (C/S T.001 Beacon Part).....	A-3
Table A.3: MEOLUT Commissioning Summary Data Table (C/S T.018 Beacon Part).....	A-9
Table A.4: MEOLUT Test Beacon Location Table.....	A-18
Table A.5: Implementation Status of MEOLUT Critical Changes.....	A-19
Table A.6: MEOLUT Antenna Location Table	A-20

Table E.1: Description of the Fields	E-1
Table E.2:MEOLUT Satellite Tracking.....	E-1
Table E.3: Beacon Message Data	E-2
Table E.4: MEOLUT Solution Data	E-4
Table E.6: Beacon Database Description.....	E-6
Table E.7: Beacon Test Script Log	E-6

1. INTRODUCTION

1.1 Purpose

The Cospas-Sarsat MEOLUT Commissioning Standard shall be used to verify that a MEOSAR Local User Terminal (MEOLUT) complies with document C/S T.019, "Cospas-Sarsat MEOLUT Performance Specification and Design Guidelines". The national Administrations that wish to connect a new MEOLUT to the Cospas-Sarsat network shall conduct the tests and provide the data, which is specified in this document, to the Cospas-Sarsat Secretariat. The MEOLUT to be commissioned shall be fully described according to the technical file located in Annex A, Appendix 1.

1.2 Scope

This standard specifies MEOLUT commissioning for the 406 MHz data channels that are relayed through the MEOSAR satellites and received and processed by the MEOLUT. Section 2 defines the general commissioning process, section 3 describes the evaluation of the operational requirements, section 4 specifies the commissioning of functional and processing requirements, and section 5 specifies the commissioning of performance requirements. The annexes define the test requirements, signal characteristics, test beacon messages, the format of the test data which is to be collected, and the format of the commissioning report which is to be submitted to the Cospas-Sarsat Secretariat.

1.3 Reference Documents

The following documents contain useful information applicable to MEOLUT commissioning:

Reference	Title
C/S A.001	Cospas-Sarsat Data Distribution Plan (DDP)
C/S A.002	Cospas-Sarsat Mission Control Centres Standard Interface Description (SID)
C/S A.003	Cospas-Sarsat System Monitoring and Reporting
C/S A.005	Cospas-Sarsat MCC Performance Specification and Design Guidelines
C/S A.006	Cospas-Sarsat MCC Commissioning Standard
C/S T.001	Specification for Cospas-Sarsat 406 MHz Distress Beacons
C/S T.006	Cospas-Sarsat Orbitography Network Specification
C/S T.011	Description of the 406 MHz Payloads Used in the Cospas-Sarsat GEOSAR System
C/S T.016	Description of the 406 MHz Payload Used in the Cospas-Sarsat MEOSAR System
C/S T.015	Cospas-Sarsat Specification and Type Approval Standard for 406 MHz Ship Security Alert (SSAS) Beacons
C/S T.017	Cospas-Sarsat MEOSAR Space Segment Commissioning Standard
C/S T.018	Specification for Second Generation Cospas-Sarsat 406 MHz Distress Beacons
C/S T.019	Cospas-Sarsat MEOLUT Performance Specification and Design Guidelines

2. MEOLUT COMMISSIONING

2.1 General

The Cospas-Sarsat MEOLUT commissioning tests defined in this document are intended to be performed in addition to national acceptance tests, and are required prior to fully integrating a MEOLUT into the Cospas-Sarsat Ground Segment. Conducting these tests and assessing the results is the responsibility of the national Administration that desires to commission a MEOLUT.

The tests verify the MEOLUT's ability to receive and process signals transmitted from a distress beacon that is compliant with document C/S T.001, "Specification for Cospas-Sarsat 406 MHz Distress Beacons" or document C/S T.018, "Specification for Second Generation Cospas-Sarsat 406 MHz Distress Beacons", relayed by the MEOSAR satellites described in document C/S T.016, "Description of the 406 MHz Payload Used in the Cospas-Sarsat MEOSAR System", and received and processed in accordance with document C/S T.019. A cross reference of the requirements in document C/S T.019 and the corresponding commissioning requirements specified in this document is provided in the "Summary Table" of the commissioning report (Annex A). The tests shall be conducted with the MEOLUT in its operational configuration and location, and connected to the associated MCC. However, the data should not be distributed to other Cospas-Sarsat Ground Segment Operators.

The MEOLUT may provide optional capabilities as described in document C/S T.019, such as:

1. the MEOLUT may provide 406 MHz beacon data to other MEOLUTs according to the specifications contained in document C/S T.019,
2. the MEOLUT may process 406 MHz beacon data retrieved from other commissioned MEOLUTs according to the MEOLUT data exchange specifications contained in C/S T.019 to enhance system performance and support redundancy of the Cospas-Sarsat Ground Segment,
3. the ability to receive and process beacon signals received through downlinks from non-MEOSAR, Cospas-Sarsat commissioned satellites to obtain beacon data.

The MEOLUT must initially be commissioned with all optional capabilities disabled according to the non-optional tests described in Annex A. The optional capabilities, if to be used, must then be commissioned to verify that the MEOLUT meets all requirements as described by the optional tests contained in Annex A.

2.2 Pre-Test Requirements

Prior to commencing the test, the national Administration conducting the test shall coordinate with appropriate authorities in its SAR region, as well as notifying all affected Cospas-Sarsat MCCs, of the periods of operation and the location(s) of each of the test beacon(s). It is also invited to provide this information to the Cospas-Sarsat Secretariat.

~~Before the commissioning begins~~ *Prior to commencing the tests*, the national Administration *in consultation with the MEOLUT manufacturer* ~~shall~~*must* identify the Declared Coverage Area (DCA) of the MEOLUT, as described in document C/S T.019 *and in section A.5 of this document*. ~~The processing of a beacon located within the DCA shall meet the requirements in document C/S T.019~~. The DCA ~~shall~~*must* be verified using performance analysis, simulation, or both, and ~~shall~~*must* be equal to or greater than the Minimum Performance Area defined in document C/S T.019. The DCA ~~shall~~*must* indicate the declared coverage for each beacon identified in document C/S T.019; that is:

- the declared coverage for non-ELT(DT) C/S T.001 beacons, where relevant performance specifications are met,
- the declared coverage for ELT(DT) C/S T.001 beacons, where relevant performance specifications are met,
- the declared coverage for non-ELT(DT) C/S T.018 beacons, where relevant performance specifications are met,
- the declared coverage for ELT(DT) C/S T.018 beacons, where relevant performance specifications are met.

Assumptions with respect to visibility as per Annex D of document C/S T.019 and TOA/FOA data quality and single-channel throughput used in the analysis or simulation should be validated with data from Annex E.

The MEOLUT shall be commissioned with all assets that comprise the MEOLUT. However, if the DCA assumes fewer assets, for example, fewer antenna beams, then commissioning results shall also be reported for a MEOLUT in that configuration. In particular, if fewer antenna beams are used for the DCA, only data that results from an antenna tracking schedule generated using the fewer number of antenna beams shall be used in generating the results. This may result in the need for two sets of results, one for the MEOLUT with all available assets, and one for the MEOLUT with the configuration needed for the DCA.

2.3 Test Data Collection

The commissioning process for the MEOLUT comprises the collection of specific beacon messages and the specified numbers of solutions. The MEOLUT shall utilize beacon data received directly from downlinks from MEOSAR satellites for the data acquisition and statistical data analysis for the commissioning tests.

Data collection requirements for commissioning a MEOLUT's optional capabilities are as follows:

1. The MEOLUT, once commissioned, may provide 406 MHz beacon data to other MEOLUTs according to the specifications contained in document C/S T.019. Data collected directly from downlinks from commissioned MEOSAR satellites that comply with document C/S T.016, "Description of the 406 MHz Payload Used in the Cospas-Sarsat MEOSAR System" and document C/S T.017 "Cospas-Sarsat MEOSAR Space Segment Commissioning Standard" shall be used for the data acquisition and statistical data analysis for the commissioning tests.

2. The MEOLUT may process 406 MHz beacon data retrieved from other commissioned MEOLUTs according to the MEOLUT data exchange specifications contained in document C/S T.019. Data from every commissioned MEOLUT that will provide data to the MEOLUT being commissioned shall be used for the data acquisition and statistical data analysis for the commissioning tests.
3. The MEOLUT has the ability to receive and process beacon signals received through downlinks from non-MEOSAR, Cospas-Sarsat commissioned satellites to obtain beacon data. Data collected from every non-MEOSAR, Cospas-Sarsat commissioned satellite that will be used shall be included in the data acquisition and statistical data analysis for the commissioning tests.

2.4 Frequency Registration

Administrations should register their MEOLUT's use of the 1544 to 1545 MHz frequency band by "notifying" their MEOLUTs with the International Telecommunication Union (ITU) in accordance with article 11 of the radio regulations. The information required to notify MEOLUTs is identified at Annex H. The ITU only accepts notification requests submitted in electronic format and has developed a software application, available free of charge from their web site, which captures the required information and produces the necessary electronic file.

2.5 Data Collection Limitation

Only the data collected from those satellite channels that comply with documents C/S T.016 and C/S T.017 shall be used for the statistical data analysis. Data from satellites in an Initial Operational Capability (IOC) status should not be used for test data collection.

The data collection limitations for commissioning a MEOLUT's optional capabilities are as follows:

1. The MEOLUT once commissioned may provide 406 MHz beacon data to other MEOLUTs according to the specifications contained in document C/S T.019. Only the data collected from those satellite channels that comply with documents C/S T.016 and C/S T.017 shall be used for the statistical data analysis. Data from satellites in an Initial Operational Capability (IOC) status should not be used for test data collection.
2. The MEOLUT may process 406 MHz beacon data retrieved from other commissioned MEOLUTs according to the MEOLUT data exchange specifications contained in C/S T.019 to enhance system performance and support redundancy of the Cospas-Sarsat Ground System. Only data that has been retrieved from another MEOLUT that has also been commissioned to provide 406 MHz beacon data to other MEOLUTs may be used.
3. The MEOLUT may have the ability to receive and process beacon signals received through downlinks from non-MEOSAR, Cospas-Sarsat commissioned satellites to obtain beacon data. Only the data collected from commissioned satellites shall be used. Data from satellites in an Initial Operational Capability (IOC) status should not be used for test data collection.

2.6 Reference System

All location data for the MEOLUT commissioning shall be given with respect to the Bureau International de l'Heure (BIH) geodetic reference system.

2.7 Submission of Results

The results of the MEOLUT commissioning process shall be documented in the commissioning report, in accordance with the format detailed at Annex A.

The complete commissioning report and the data files detailed at Annex E are to be submitted to the Cospas-Sarsat Secretariat for further evaluation, and distribution to Participants for subsequent review at the Joint Committee. Revisions or updates to commissioning reports should be provided to the Secretariat with a clear indication given on the cover page of the sections that have been revised and a short description of the nature of the revisions.

In order to provide Participants with sufficient time to adequately review the commissioning report, all reports (or updates) must be submitted to the Secretariat a minimum of six weeks prior to the start of the Joint Committee meeting. Submissions received after this date will be considered for review at the following Joint Committee meeting.

2.8 MEOLUT Commissioning and Integration

The test results, as defined in the annexes, shall be submitted to the Cospas-Sarsat Secretariat. The results will be reviewed by the Cospas-Sarsat Secretariat and submitted to the Joint Committee. The MEOLUT will be integrated into the Cospas-Sarsat Ground Segment as described in Annex F and Annex G.

2.9 MEOLUT/MCC Interface

Validation that the MEOLUT/MCC interface satisfies the minimum requirements of document C/S T.019 shall be completed by the national Administration as part of the MEOLUT commissioning.

2.10 Confirmation of Requirements

The national Administration shall confirm compliance to all requirements detailed in this document with either a measurement, a verification, a declaration, analysis or a combination of these methods:

- a) A measurement requires the national Administration to conduct a test and include the supporting data as part of the commissioning report.
- b) A verification requires a national Administration to test a requirement; however, supporting data does not need to be provided as part of the commissioning report.

- c) A declaration of compliance confirms that specific requirements are met although not necessarily tested as part of the commissioning process.
- d) Analysis requires the national Administration to provide analysis as part of the commissioning report that confirms that specific requirements are met.

Conformance to all requirements shall be documented in the commissioning report.

The exact method of confirming compliance for each respective requirement is identified in the summary table of the commissioning report (Annex A).

For requirements, whose compliance are confirmed by measurement, Annex A indicates whether the measurement must be done after installation at the installation site (S) or can alternatively be done at the vendor's facility (F). Measurements done at the vendor's facility must follow the same procedures as specified for testing done at the installation site, including the provision of test data.

Annex A also indicates which measurements can be confirmed using results from prior commissioning of the same hardware and software versions (P). Any changes in the hardware or software version that are claimed to be equivalent must be justified by the commissioning authority.

2.11 Change of Configuration

2.11.1 Location of MEOLUT

If the location of a commissioned MEOLUT has been changed, the responsible national Administration shall ensure that the MEOLUT continues to satisfy C/S T.019 requirements prior to resuming operations. Additionally, the national Administration shall:

- a) confirm that the level of local interference does not adversely affect the MEOLUT performance;
- b) verify the performance of the communication links;
- c) verify the performance of the antenna and RF subsystems; and
- d) update the technical file of the MEOLUT commissioning report (Appendix 1 to Annex A refers) by providing a declaration that the MEOLUT satisfies C/S T.019 requirements and the following information, to the Cospas-Sarsat Secretariat:
 - Antenna Characteristics (Annex A, Appendix 1, section A.2.1),
 - General LUT Indoor Equipment Description (Annex A, Appendix 1, section A.2.2) - identify any changes to the equipment configuration, or indicate "no change" if the configuration has not been changed,
 - General Capabilities (Annex A, Appendix 1, section A.2.3), - identify any changes to the general capabilities of the MEOLUT, or indicate "no change" if appropriate,
 - Communications Capability (Annex A, Appendix 1, section A.4),
 - Declared Coverage Area (Annex A, Appendix 1, section A.5),

- Location (Annex A, Appendix 1, section A.6).

2.11.2 Modification to MEOLUT Configuration (e.g., Addition of Satellite Channels, Addition of Data Sources or Significant Change in the Processing)

If the configuration of a commissioned MEOLUT has been changed, the responsible national Administration shall ensure that the MEOLUT continues to satisfy C/S T.019 requirements prior to resuming operations. After the configuration change, Administrations shall confirm the MEOLUT satisfies C/S T.019 before distributing data from the MEOLUT operationally. Additionally, the national Administration shall:

- a. verify the performance of the antenna and RF subsystems if adding a new antenna or a new channel;
- b. provide updated Tables A.1, A.2 and A.3, and conduct tests defined in Annex A, at least for performance testing related to section 5 of document C/S T.019;
- c. update the technical file of the MEOLUT commissioning report (Appendix 1 to Annex A refers) by providing a declaration that the MEOLUT satisfies C/S T.019 requirements and the following information, to the Cospas-Sarsat Secretariat:
 - i. Antenna Characteristics (Annex A, Appendix 1, section A.2.1) if adding a new antenna, or indicate “no change” if the configuration has not been changed,
 - ii. General LUT Indoor Equipment Description (Annex A, Appendix 1, section A.2.2) - identify any changes to the equipment configuration, or indicate “no change” if the configuration has not been changed,
 - iii. General Capabilities (Annex A, Appendix 1, section A.2.3), - identify any changes to the general capabilities of the MEOLUT, or indicate “no change” if appropriate,
 - iv. Communications Capability (Annex A, Appendix 1, section A.4),
 - v. Declared Coverage Area (Annex A, Appendix 1, section A.5).

In general, any change that is determined to potentially impact MEOLUT performance, especially beacon alert detection or location performance, requires retesting to verify that the MEOLUT continues to satisfy C/S T.019 requirements. National Administrations shall make this determination, possibly with consultation with the MEOLUT vendor and Cospas-Sarsat experts.

Some conditions that may be considered a change in configuration that would warrant conducting these tests might include:

- a. adding a new antenna or channel to a commissioned MEOLUT;
- b. removing an antenna or channel from a commissioned MEOLUT;
- c. adding data collection from other commissioned MEOLUTs that exchange data according to the MEOLUT data exchange specifications contained in document C/S T.019;
- d. significant modifications to the MEOLUT processing algorithm(s), other software, or hardware; *and*
- e. implementing major new functionality/*critical change* (e.g., processing of a new beacon standard), *if required by Council; and-*
- f. *Addition or removal of a satellite constellation.*

The responsible administration shall submit results of its verification of MEOLUT performance in a supplementary commissioning report to the Joint Committee meeting for subsequent review.

- END OF SECTION 2 -

3. EVALUATION OF OPERATIONAL REQUIREMENTS

3.1 MEOLUT Data Availability

The MEOLUT data availability shall be measured during the commissioning period in accordance with guidance provided at Annex B. If any basic function or requirement is not performed by the MEOLUT, the MEOLUT data shall be considered unavailable.

A reliability assessment is performed by measurement during the commissioning period and by an analysis that predicts the availability for a one-year period to verify that the MEOLUT will meet the availability requirement in accordance with guidance provided at Annex B.

3.2 Data Requirements

The national Administration shall ensure that the MEOLUT provides the data necessary for the associated MCC to distribute alert data according to document C/S A.002 (SID). This shall be verified and noted in the appropriate section of the MEOLUT commissioning report.

3.3 Satellite Tracking and Visibility Capability

The national Administration shall ensure that the MEOLUT shall be capable of meeting the requirements of section 3.4 in document C/S T.019. This shall be declared in the appropriate section of the MEOLUT commissioning report.

3.4 Status and Alarm

The national Administration shall describe the status and alarm functions of the MEOLUT and declare compliance in the appropriate section of the MEOLUT commissioning report.

3.5 RF Radiation and Emissions

The national Administration shall ensure that the MEOLUT does not radiate or emit any radio frequency signals that will interfere with the functioning of the Cospas-Sarsat System. This shall be declared in the appropriate section of the MEOLUT commissioning report.

3.6 Data Archiving

The national Administration shall describe the data archiving capability of the MEOLUT and declare compliance to the relevant section of document C/S T.019 in the appropriate section of the MEOLUT commissioning report.

4. EVALUATION OF FUNCTIONAL AND PROCESSING REQUIREMENTS

4.1 Functional Requirements

4.1.1 Antenna and RF Subsystems

The national Administration shall verify that the antenna and RF subsystems of the MEOLUT can acquire, track and receive the downlink signals from any Cospas-Sarsat MEOSAR satellites as described in document C/S T.016. This verification shall be documented in the MEOLUT commissioning report.

4.1.2 Time and Frequency Reference Subsystem

The national Administration shall declare in the MEOLUT commissioning report, the MEOLUT's capability to maintain time and frequency subsystems according to document C/S T.019.

4.1.3 Satellite Tracking Subsystem

The national Administration shall declare, in the MEOLUT commissioning report, the MEOLUT's capability to maintain accurate satellite orbital elements and tracking schedules as described in document C/S T.019.

4.1.4 MCC Interface

The national Administration shall verify that the MEOLUT provides timely alert data of the level of quality and detail specified in documents C/S T.019, C/S A.002 and C/S A.005, "Cospas-Sarsat Mission Control Centre Performance Specification and Design Guidelines". This verification shall be documented in the MEOLUT commissioning report.

The national Administration shall declare in the MEOLUT commissioning report the methodology used by the MEOLUT to determine when an independent-location solution has a better location quality than solutions previously sent to the MCC, so that the better-quality solution would then be sent to the associated MCC.

4.2 Beacon Message Processing

The national Administration shall conduct tests, and record the results in the appropriate section of the commissioning report, which confirm the MEOLUTs compliance to the "channels processing specifications" detailed in document C/S T.019.

These tests require the MEOLUT to process the data described at Annex D.1 in the manner prescribed. The processing consists of bit verification, message validation, message processing and transmission. The specific beacon test messages contained at Annex D.1 can be transmitted by a test beacon or a beacon simulator.

National Administrations should ensure that test beacons or simulators are capable of transmitting the beacon messages at the frequencies described at Annex D.1. Alternatively, national Administrations may arrange for the simulators in the United States or France to uplink the messages contained at Annex D.1. If the test messages cannot be transmitted during the commissioning period, the national Administration may develop alternative methods of confirming compliance with the beacon message processing requirements and proceed with the commissioning test, and preparation and submission of the commissioning report. For beacon message processing, the unavailability of the test beacon or simulators to uplink the test messages contained at Annex D.1 shall not prevent the MEOLUT from being commissioned, if other adequate methods are used. If alternative methods are used, these methods shall be completely documented in the commissioning report.

- END OF SECTION 4 -

5. EVALUATION OF PERFORMANCE REQUIREMENTS

The national Administration shall conduct the tests defined at Annex C to confirm conformance with the MEOLUT performance requirements detailed at document C/S T.019. The results of these tests shall be included in the MEOLUT commissioning report. Additional guidance pertaining to the tests detailed at Annex C is provided in the remainder of this section.

5.1 Data Collection Test

Tests shall be conducted to confirm that the MEOLUT processing satisfies the performance requirements detailed in document C/S T.019.

All data collected from test beacons during the entire time period of the commissioning test shall be used to generate statistics that validate the performance requirements are met.

All data and results shall be provided electronically to the Secretariat as part of the commissioning report. The required data elements and the format of the files to be included in the commissioning report are detailed in Annex E.

5.1.1 Test Beacons

Beacon tests shall be conducted with type-approved Cospas-Sarsat 406 MHz beacons coded with the test protocol and/or beacon simulators (i.e., not an orbitography beacon), as described in document C/S T.022. The beacons that are used for these tests shall not be used for updating the satellite orbital elements. However, any reference beacon that is not used by the MEOLUT for the determination of satellite orbits may be used as a test beacon during the commissioning of the MEOLUT. The characteristics of all beacons used during commissioning shall be described in the commissioning report.

Each test beacon must be placed as described below at a 3D position that is known to within 5 metres, and shall remain fixed at this position throughout the test (except for tests involving moving beacons). For tests involving moving beacons, a reference trajectory (set of time/latitude/longitude/altitude points) shall be provided with a sufficient accuracy (e.g., 10 m for SGB, 100 m for FGB; the location accuracy of the reference trajectory shall be reported for review). The test beacon locations shall be given with respect to the reference system given in section 2.6.

- 1) Use test beacon(s) located at the MEOLUT to perform all commissioning tests to verify the MEOLUT meets all performance requirements.
- 2) Use 1 or more test beacon(s) located as near the edge of the Declared Coverage Area as practical or at least 1,000 km from the MEOLUT, to demonstrate the MEOLUT Declared Coverage Area.

These tests require the MEOLUT to process the data described at Annex D.3 in the manner prescribed. The processing consists of beacon detection probability, probability of DOA location, DOA location

accuracy, TOA/FOA measurement accuracy (if applicable), and expected horizontal error / quality factor. The specific beacon test messages contained at Annex D.3 can be transmitted by a test beacon or a beacon simulator.

Beacons, and their set-up, used for the moving test configurations shall be documented in the commissioning report. Their location and velocity as a function of time shall be reported in the commissioning report. The beacon velocity profile should include velocities in a nearly static configuration and in a slow-moving configuration, as well as the transition between these regimes.

National Administrations should ensure that test beacons or simulators are capable of transmitting the beacon messages at the frequencies described at Annex D.3. Alternatively, national Administrations may arrange for the simulators in the USA or France to uplink the messages contained at Annex D.3. If the test messages cannot be transmitted during the commissioning period, the national Administration may develop alternative methods of confirming compliance with the beacon message processing requirements and proceed with the commissioning test, and preparation and submission of the commissioning report. The unavailability of the test beacon or simulators to uplink the test messages contained at Annex D.3 shall not prevent the MEOLUT from being commissioned, if other adequate methods are used. If alternative methods are used, these methods shall be completely documented in the commissioning report.

If test beacons transmit in the operational 406 MHz frequency band or if beacon bursts are transmitted using the normal frame synchronization pattern, the total number of beacons simultaneously active shall not exceed 5.

5.1.2 Satellite Tracking Schedule

Beacon tests shall consist of receiving and processing data on all scheduled passes from the commissioned satellites that are visible during the test period. All available data channels shall be used for the collection of data from available satellites during this data collection test.

5.2 Detection and Location Statistics

Statistics will be reported for beacons identified in section 5.1.1, item 1, and separately for those identified in item 3.

Statistics will be also reported for all orbitography/reference beacons defined in document C/S A.001.

The statistics are defined in Annex A and shall be derived as listed in Annex C.

5.3 Detection and Location Data

The detection and location data from all tracked satellite passes shall be provided for each test beacon used during the test period.

A minimum of 1,000 ~~for C/S T.001 and 10,000 for C/S T.018~~ beacon burst transmissions shall be used to establish the detection data statistics *for both C/S T.001 and C/S T.018 beacons*. A minimum of 1,000 location data solutions shall be used to establish the location data statistics for both C/S T.001 and C/S T.018 beacons.

A minimum of 100,000 detections shall be used to establish the processing anomaly statistics.

- END OF SECTION 5 -

ANNEX A**MEOLUT COMMISSIONING REPORT**

Country or national Administration: _____

Cospas-Sarsat Identifier: _____

Location of MEOLUT: _____

Start of Commissioning Period: _____

End of Commissioning Period: _____

Commissioning documents versions

C/S T.019, Issue [XX], Revision [XX]

C/S T.020, Issue [XX], Revision [XX]

Section A.1 contains a summary of the commissioning results as well as the analysis (A), declarations (D) and verifications (V), by the national Administration, for requirements not specifically measured (M). The organization of the summary table follows the requirements contained in document C/S T.019.

For requirements, whose compliance are confirmed by measurement, section A.1 indicates whether the measurement must be done after installation at the installation site (S) or can alternatively be done at the vendor's facility (F). Measurements done at the vendor's facility must follow the same procedures as specified for testing done at the installation site, including the provision of test data.

Section A.1 also indicates which measurements can be confirmed using results from prior commissioning of the same hardware and software versions (P). Any changes in the hardware or software version that are claimed to be equivalent must be justified by the commissioning authority.

For every requirement, if there is no indication in Tables A.1, A.2 and A.3 of whether a requirement can be confirmed on site (S), at vendor's facility (F) or from previous commissioning (P), the requirement must be verified on site.

Section A.2 contains the measurements (M) to support the results presented in section A.1, a copy of the associated data is provided in electronic format as required by this document. A technical description of the MEOLUT is presented in Appendix 1.

Section A.3 contains a summary table providing the implementation status of the MEOLUT critical changes decided by the Council.

A.1 Summary Table

Tables A.1, A.2 and A.3 shall be provided in full in the commissioning report (for initial or subsequent commissioning), with rows not applicable showing as greyed out.

Table A.1: MEOLUT Commissioning Summary Data Table (General Part)

Section in C/S T.019	Requirement or Test	Pass Criteria	Result or Report Ref	Pass/ Fail	Method of Compliance	Declaration / Verification or Comments	Facility (F) or Installation Site (S)	Prior Results (P) or not
3.1	MEOLUT Data Availability	A \geq 95	2.1.1		M, A		S	No
3.2	Data Requirements	n/a	n/a		D, V	Verify capability to use standard formats in Table 3.1 of C/S T.019. If non-standard formats will be used, declare and verify this capability.		
3.3.1	Satellite Data Channels	Minimum MEOSAR	n/a		V			
3.3.2	MEOLUT Data Exchange	n/a	n/a		D	Only applicable to MEOLUTs which exchange data with other MEOLUTs		
3.4	Satellite Tracking and Visibility	n/a	n/a		V			
3.5	Status and Alarm	n/a	n/a		D	Include description in technical file		
3.6	RF Radiation and Emissions	n/a	n/a		D			
3.7	Data Archiving	n/a	n/a		D			
3.8	QMS	n/a			D			
4.1.1	Antenna and RF Subsystem	n/a	n/a		V			
4.1.2	Time and Frequency Reference Subsystem	n/a	n/a		V			
4.1.3	Satellite Tracking Subsystem	All MEOSAR satellites	n/a		D			
4.1.4	MCC Interface	n/a	n/a		V			
4.2.8	MEOLUT Data Exchange	See C/S T.019 Annex C	n/a		D	Only applicable to MEOLUTs which exchange data with other MEOLUTs		
4.2.9	Time and Frequency Requirements	n/a	n/a		D			
4.2.10	Independent Location Processing	n/a	n/a		V	Check generation of location and validity		
4.2.11	Transmitting Data to the MCC	n/a	n/a		V	Using MCC message log table as defined in Annex E. See additional tests for ELT(DT) beacons in Tables A.2 and A.3		
5	Declared Coverage Area (for each beacon identified in document C/S T.019)	n/a	Appendix 1, A.5		A and/or V	See section Appendix 1, section A.5		

Table A.2: MEOLUT Commissioning Summary Data Table (C/S T.001 Beacon Part)

Section in C/S T.019	Requirement or Test	Pass Criteria	Result or Report Ref	Pass/ Fail	Method of Compliance	Declaration / Verification or Comments	Facility (F) or Installation Site (S)	Prior Results (P) or not
4.2.2	Beacon Message Recovery	Exact match on 9 Bit Frame Synch	n/a		D	Achieve identical match on 9 bit frame synchronization		
<i>4.2.1 (See para 2.2.4.B to C/S T.001)</i>	Bit Rate Tolerance Check Test - BR1	M/N>0.75	2.2.1		M	For 396 bps	<i>F</i>	<i>P</i>
					M	For 404 bps	<i>F</i>	<i>P</i>
4.2.3.1	Bit Verification Test - BV1	See Annex D.1	2.2.2		M		<i>F</i>	<i>P</i>
	Bit Verification Test - BV2	See Annex D.1	2.2.2		M		<i>F</i>	<i>P</i>
	Bit Verification Test - BV3	See Annex D.1	2.2.2		M		<i>F</i>	<i>P</i>
4.2.4.1	Beacon Message Validation Test - MV1	See Annex D.1	2.2.3		M		<i>F</i>	<i>P</i>
	Beacon Message Validation Test - MV2	See Annex D.1	2.2.3		M		<i>F</i>	<i>P</i>
	Beacon Message Validation Test - MV5	See Annex D.1	2.2.3		M		<i>F</i>	<i>P</i>
	Beacon Message Validation Test - MV6	See Annex D.1	2.2.3		M		<i>F</i>	<i>P</i>
4.2.5.1	Invalid Message Processing Test - IMP1	See Annex D.1	2.2.4		M		<i>F</i>	<i>P</i>
4.2.6.1	Beacon Message Processing Test - LP1	See Annex D.1	2.2.5		M		<i>F</i>	<i>P</i>
	Beacon Message Processing Test - LP2	See Annex D.1	2.2.5		M		<i>F</i>	<i>P</i>
	Beacon Message Processing Test - LP3	See Annex D.1	2.2.5		M		<i>F</i>	<i>P</i>
	Beacon Message Processing Test - LP4	See Annex D.1	2.2.5		M		<i>F</i>	<i>P</i>
4.2.6.1 and 4.2.11	Return Link Test - RL1	See Annex D.1	2.2.6		M		<i>F</i>	<i>P</i>
4.2.7	Multiple valid message processing	n/a	2.2.7		D			
4.2.11	Transmitting Data to the MCC	n/a	n/a		V	Using MCC message log table as defined in Annex E		
			2.2.8		M	For C/S T.001 ELT(DT) beacons using script in section D.3.2.2	<i>F</i>	<i>P</i>
5.1	RF Signal Margin	n/a	n/a		D			
5.2.1	Signal Sensitivity	Signal sensitivity better than 34.8 dB-Hz			D			
5.3.1	Beacon Message Detection Probability (nearly-static beacon)	T≥0.99	2.3.1.1		M	After 10 minutes - Configuration 1	<i>S</i>	<i>No</i>
					M	After 10 minutes - Configuration 2	<i>F</i>	<i>P</i>
	Beacon Message Detection Probability ((low speed) slow-moving beacon)	T≥0.99	2.3.1.1		M	After 10 minutes - Configuration 3.1	<i>F</i>	<i>P</i>
			2.3.1.1		M	After 10 minutes - Configuration 3.2	<i>F</i>	<i>P</i>
	Beacon Message Detection Probability ^(#) ((medium speed) slow-moving beacon)	T≥0.99	2.3.1.1		M	After 10 minutes - Configuration 4	<i>F</i>	<i>P</i>
	Beacon Message Detection Probability ^(*)	T≥0.99	2.3.1.1		M	After 10 minutes - Configuration 5	<i>TBD</i>	<i>TBD</i>

Section in C/S T.019	Requirement or Test	Pass Criteria	Result or Report Ref	Pass/ Fail	Method of Compliance	Declaration / Verification or Comments	Facility (F) or Installation Site (S)	Prior Results (P) or not
	(fast-moving beacon)							
	Beacon Message Detection Probability (ELT(DT))	T>0.99	2.3.1.2		M	Within any 1 minute period	S	No
5.4.1.1, 5.4.2.1	Probability of FDOA/TDOA Location (nearly-static beacon)	PDL≥0.90	2.3.1.3		M	Single burst – Configuration 1	S	No
					M	Single burst – Configuration 2	F	P
		PDL≥0.98	2.3.1.3		M	After 10 minutes - Configuration 1	S	No
					M	After 10 minutes - Configuration 2	F	P
	Probability of FDOA/TDOA Location ((low speed) slow-moving beacon)	PDL≥0.90	2.3.1.3		M	Single burst – Configuration 3.1	F	P
					M	Single burst – Configuration 3.2	F	P
		PDL≥0.98	2.3.1.3		M	After 10 minutes - Configuration 3.1	F	P
					M	After 10 minutes - Configuration 3.2	F	P
	Probability of FDOA/TDOA Location ^(#) ((medium speed) slow-moving beacon)	PDL≥0.90	2.3.1.3		M	After 10 minutes Single burst - Configuration 4	F	P
		PDL≥0.98	2.3.1.3		M	After 10 minutes - Configuration 4	F	P
	Probability of FDOA/TDOA Location ^(*) (fast-moving beacon)	PDL≥0.90	2.3.1.3		M	Single burst – Configuration 5	TBD	TBD
		PDL≥0.98	2.3.1.3		M	After 10 minutes - Configuration 5	TBD	TBD
5.5	Capacity	100 beacons	n/a		D			
5.6.1	Location Accuracy (nearly-static beacon)	M/N≥0.90 (5 km)	2.3.1.4		M	Single burst – Configuration 1	S	No
					M	Single burst – Configuration 2	F	P
	Location Accuracy (nearly-static beacon)	M/N≥0.95 (5 km)	2.3.1.4		M	Within 10 minutes – Configuration 1	S	No
					M	Within 10 minutes – Configuration 2	F	P
		M/N≥0.98 (10 km)	2.3.1.4		M	Within 10 minutes – Configuration 1	S	No
5.6.3	Location Accuracy ((low speed) slow-moving beacon)	M/N≥0.70 (10 km)	2.3.1.4		M	Single burst – Configuration 3.1	F	P
					M	Single burst – Configuration 3.2	F	P
		M/N≥0.95 (20 km)	2.3.1.4		M	Single burst – Configuration 3.1	F	P
					M	Single burst – Configuration 3.2	F	P
	Location Accuracy ((low speed) slow-moving beacon)	M/N≥0.75 (5 km)	2.3.1.4		M	Within 10 minutes – Configuration 3.1	F	P
					M	Within 10 minutes – Configuration 3.2	F	P
		M/N≥0.95 (7 km)	2.3.1.4		M	Within 10 minutes – Configuration 3.1	F	P
					M	Within 10 minutes – Configuration 3.2	F	P
5.6.5	Location Accuracy ^(#) ((medium speed) slow-moving beacon)	M/N≥0.70 (10 km)	2.3.1.4		M	Single burst – Configuration 4	F	P
		M/N≥0.95 (20 km)	2.3.1.4		M	Single burst – Configuration 4	F	P
	Location Accuracy ^(#) ((medium speed) slow-moving beacon)	M/N≥0.75 (5 km)	2.3.1.4		M	Within 10 minutes – Configuration 4	F	P
		M/N≥0.95 (7 km)	2.3.1.4		M	Within 10 minutes – Configuration 4	F	P
5.6.7	Location Accuracy ^(*) (fast-moving beacon)	M/N>0.90 (TBD km)	2.3.1.4		M	Single burst – Configuration 5	TBD	TBD
	Location Accuracy ^(*) (fast-moving beacon)	M/N≥0.95 (TBD km)	2.3.1.4		M	Within 10 minutes – Configuration 5	TBD	TBD
		M/N≥0.98 (TBD km)	2.3.1.4		M	Within 10 minutes – Configuration 5	TBD	TBD

Section in C/S T.019	Requirement or Test	Pass Criteria	Result or Report Ref	Pass/ Fail	Method of Compliance	Declaration / Verification or Comments	Facility (F) or Installation Site (S)	Prior Results (P) or not
5.7.1	Processing Bandwidth	406.006 to 406.094 MHz	n/a		D			
5.7.2	Acquisition Frequency Range	Beacon with a deviation from the center frequency of ± 5.45 kHz	n/a		D			
5.8.1.1	TOA/FOA Measurement Accuracy	TOA _o < 25 μ sec TOA _{bias} < 2.5 μ sec FOA _o < 0.2 Hz FOA _{bias} < 0.02 Hz	2.3.2.6		M	Only applicable to MEOLUTs which will provide data to other MEOLUTs $34.8 \text{ dBHz} < C/N_0 < 37.8 \text{ dBHz}$	F	P
5.8.2	External Data Processing	C/S T.019 sections 4.2.10 and 5			D	Only applicable to MEOLUTs which process data from other MEOLUTs		
	Transmitting Data to the MCC	n/a	n/a		V	Using MCC message log table as defined in Annex E.		
			2.2.8		M	For C/S T.001 ELT(DT) beacons using script in section D.3.2.2	F	P
	RF Signal Margin	n/a	n/a		D			
	Signal Sensitivity	Signal sensitivity better than 34.8 dB-Hz			D			
	Beacon Message Detection Probability (nearly-static beacon)	T \geq 0.99	2.3.2.1		M	After 10 minutes - Configuration 1	S	No
			2.3.2.1		M	After 10 minutes - Configuration 2	F	P
	Beacon Message Detection Probability ((low speed) slow-moving beacon)	T \geq 0.99	2.3.2.1		M	After 10 minutes - Configuration 3.1	F	P
			2.3.2.1		M	After 10 minutes - Configuration 3.2	F	P
	Beacon Message Detection Probability ^(#) ((medium speed) slow-moving beacon)	T \geq 0.99	2.3.2.1		M	After 10 minutes - Configuration 4	F	P
	Beacon Message Detection Probability ^(*) (fast-moving beacon)	T \geq 0.99	2.3.2.1		M	After 10 minutes - Configuration 5	TBD	TBD
	Beacon Message Detection Probability (ELT(DT))	T $>$ 0.99	2.3.2.2		M	Within any 1 minute period	S	No
	Probability of FDOA/TDOA Location (nearly-static beacon)	PDL \geq 0.90	2.3.2.3		M	Single burst - Configuration 1	S	No
					M	Single burst - Configuration 2	F	P
	Probability of FDOA/TDOA Location ((low speed) slow-moving beacon)	PDL \geq 0.98	2.3.2.3		M	After 10 minutes - Configuration 1	S	No
					M	After 10 minutes - Configuration 2	F	P
	Probability of FDOA/TDOA Location ^(#) ((medium speed) slow-moving beacon)	PDL \geq 0.90	2.3.2.3		M	Single burst - Configuration 3.1	F	P
			2.3.2.3		M	Single burst - Configuration 3.2	F	P
	Probability of FDOA/TDOA Location ^(*) (fast-moving beacon)	PDL \geq 0.98	2.3.2.3		M	After 10 minutes - Configuration 3.1	F	P
			2.3.2.3		M	After 10 minutes - Configuration 3.2	F	P
	Capacity	100 beacons	n/a		D			

Section in C/S T.019	Requirement or Test	Pass Criteria	Result or Report Ref	Pass/ Fail	Method of Compliance	Declaration / Verification or Comments	Facility (F) or Installation Site (S)	Prior Results (P) or not
	Location Accuracy (nearly-static beacon)	M/N≥0.90 (5 km)	2.3.2.4		M	Single Burst – Configuration 1	<i>S</i>	<i>No</i>
		M		Single burst – Configuration 2	<i>F</i>	<i>P</i>		
	Location Accuracy (nearly-static beacon)	M/N≥0.95 (5 km)	2.3.2.4		M	Within 10 minutes – Configuration 1	<i>S</i>	<i>No</i>
					<i>M</i>	Within 10 minutes – Configuration 2	<i>F</i>	<i>P</i>
	Location Accuracy (low speed) slow-moving beacon	M/N≥0.98 (10 km)	2.3.2.4		M	Within 10 minutes – Configuration 1	<i>S</i>	<i>No</i>
					<i>M</i>	Within 10 minutes – Configuration 2	<i>F</i>	<i>P</i>
		M/N≥0.70 (10 km)	2.3.2.4		M	Single burst – Configuration 3.1	<i>F</i>	<i>P</i>
			2.3.2.4		M	Single burst – Configuration 3.2	<i>F</i>	<i>P</i>
	Location Accuracy (low speed) slow-moving beacon	M/N≥0.95 (20 km)	2.3.2.4		M	Single burst – Configuration 3.1	<i>F</i>	<i>P</i>
			2.3.2.4		M	Single burst – Configuration 3.2	<i>F</i>	<i>P</i>
		M/N≥0.75 (5 km)	2.3.2.4		M	Within 10 minutes – Configuration 3.1	<i>F</i>	<i>P</i>
			2.3.2.4		M	Within 10 minutes – Configuration 3.2	<i>F</i>	<i>P</i>
	Location Accuracy (medium speed) slow-moving beacon	M/N≥0.95 (7 km)	2.3.2.4		M	Within 10 minutes – Configuration 3.1	<i>F</i>	<i>P</i>
		M/N≥0.70 (10 km)	2.3.2.4		M	Within 10 minutes – Configuration 3.2	<i>F</i>	<i>P</i>
	Location Accuracy (medium speed) slow-moving beacon	M/N≥0.95 (20 km)	2.3.2.4		M	Single burst – Configuration 4	<i>F</i>	<i>P</i>
		M/N≥0.75 (5 km)	2.3.2.4		M	Single burst – Configuration 4	<i>F</i>	<i>P</i>
	Location Accuracy (medium speed) slow-moving beacon	M/N≥0.95 (7 km)	2.3.2.4		M	Within 10 minutes – Configuration 4	<i>F</i>	<i>P</i>
	Location Accuracy ^(*) (fast-moving beacon)	M/N>0.90 (TBD km)	2.3.2.4		M	Single burst – Configuration 5	<i>TBD</i>	<i>TBD</i>
	Location Accuracy ^(*) (fast-moving beacon)	M/N≥0.95 (TBD km)	2.3.2.4		M	Within 10 minutes – Configuration 5	<i>TBD</i>	<i>TBD</i>
		M/N≥0.98 (TBD km)	2.3.2.4		M	Within 10 minutes – Configuration 5	<i>TBD</i>	<i>TBD</i>
	Processing Bandwidth	406.006 to 406.094 MHz	n/a		D			
	Acquisition Frequency Range	Beacon with a deviation from the center frequency of ± 5.45 kHz	n/a		D			
	Expected Horizontal Error / Quality Factor	Prediction Accuracy NC _{1/10} /NL < 0.15 0.93 ≤ NC ₁ /NL ≤ 0.97 NC ₂ /NL < 0.01	2.3.2.5		M		<i>EHE results must be provided for factory and on-site tests, as appropriate</i>	
	Processing Anomalies	< 1x10 ⁻⁴	2.3.2.7		M	Processing anomalies that consist of a single burst from a single satellite shall be identified separately	<i>S</i>	<i>No</i>
5.9	Combined Processing	C/S T.019 sections 4.2.10 and 5			D	Only applicable to MEOLUTs which use non-MEOSAR C/S satellites		
	Transmitting Data to the MCC	n/a	n/a		V	Using MCC message log table as defined in Annex E		
			2.2.8		M	For C/S T.001 ELT(DT) beacons using script in section D.3.2.2	<i>F</i>	<i>P</i>
	RF Signal Margin	n/a	n/a		D			

Section in C/S T.019	Requirement or Test	Pass Criteria	Result or Report Ref	Pass/ Fail	Method of Compliance	Declaration / Verification or Comments	Facility (F) or Installation Site (S)	Prior Results (P) or not
	Signal Sensitivity	Signal sensitivity better than 34.8 dB-Hz			D			
	Beacon Message Detection Probability (nearly-static beacon)	T≥0.99	2.3.3.1		M	After 10 minutes - Configuration 1	S	No
					M	After 10 minutes - Configuration 2	F	P
	Beacon Message Detection Probability ((low speed) slow-moving beacon)	T≥0.99	2.3.1.1		M	After 10 minutes- Configuration 3.1	F	P
			2.3.1.1		M	After 10 minutes - Configuration 3.2	F	P
	Beacon Message Detection Probability ^(#) ((medium speed) slow-moving beacon)	T≥0.99	2.3.1.1		M	After 10 minutes - Configuration 4	F	P
	Beacon Message Detection Probability ^(*) (fast-moving beacon)	T≥0.99	2.3.1.1		M	After 10 minute - Configuration 5	TBD	TBD
	Beacon Message Detection Probability (ELT(DT))	T>0.99	2.3.3.2		M	Within any 1 minute period	S	No
	Probability of FDOA/TDOA Location	PDL≥0.90	2.3.3.3		M	Single burst – Configuration 1	S	No
					M	Single burst – Configuration 2	F	P
	Probability of FDOA/TDOA Location ((low speed) slow-moving beacon)	PDL≥0.98	2.3.3.3		M	After 10 minutes – Configuration 1	S	No
					M	After 10 minutes - Configuration 2	F	P
	Probability of FDOA/TDOA Location ^(#) ((medium speed) slow-moving beacon)	PDL≥0.90	2.3.1.3		M	Single burst – Configuration 3.1	F	P
					M	Single burst – Configuration 3.2	F	P
	Probability of FDOA/TDOA Location ^(*) (fast-moving beacon)	PDL≥0.98	2.3.1.3		M	After 10 minutes - Configuration 3.1	F	P
					M	After 10 minutes - Configuration 3.2	F	P
	Capacity	100 beacons	n/a		D			
	Location Accuracy (nearly-static beacon)	M/N≥0.90 (5 km)	2.3.3.4		M	Single burst – Configuration 1	S	No
					M	Single burst – Configuration 2	F	P
	Location Accuracy (nearly-static beacon)	M/N≥0.95 (5 km)	2.3.3.4		M	Within 10 minutes – Configuration 1	S	No
					M	Within 10 minutes – Configuration 2	F	P
	Location Accuracy ((low speed) slow-moving beacon)	M/N≥0.98 (10 km)	2.3.3.4		M	Within 10 minutes – Configuration 1	S	No
					M	Within 10 minutes – Configuration 2	F	P
	Location Accuracy ((low speed) slow-moving beacon)	M/N≥0.70 (10 km)	2.3.3.4		M	Single burst – Configuration 3.1	F	P
					M	Single burst – Configuration 3.2	F	P
	Location Accuracy ((low speed) slow-moving beacon)	M/N≥0.95 (20 km)	2.3.3.4		M	Single burst – Configuration 3.1	F	P
					M	Single burst – Configuration 3.2	F	P
	Location Accuracy ((low speed) slow-moving beacon)	M/N≥0.75 (5 km)	2.3.3.4		M	Within 10 minutes – Configuration 3.1	F	P
					M	Within 10 minutes – Configuration 3.2	F	P
			2.3.3.4		M	Within 10 minutes – Configuration 3.1	F	P

Section in C/S T019	Requirement or Test	Pass Criteria	Result or Report Ref	Pass/ Fail	Method of Compliance	Declaration / Verification or Comments	Facility (F) or Installation Site (S)	Prior Results (P) or not
	Location Accuracy ^(#) ((medium speed) slow-moving beacon)	M/N \geq 0.95 (7 km)	2.3.3.4		M	Within 10 minutes – Configuration 3.2	F	P
		M/N \geq 0.70 (10 km)	2.3.1.4		M	Single burst – Configuration 4	F	P
		M/N \geq 0.95 (20 km)	2.3.1.4		M	Single burst – Configuration 4	F	P
	Location Accuracy ^(#) ((medium speed) slow-moving beacon)	M/N \geq 0.75 (5 km)	2.3.3.4		M	Within 10 minutes – Configuration 4	F	P
		M/N \geq 0.95 (7 km)	2.3.3.4		M	Within 10 minutes – Configuration 4	F	P
	Location Accuracy ^(*) (fast-moving beacon)	M/N $>$ 0.90 (TBD km)	2.3.3.4		M	Single burst – Configuration 5	TBD	TBD
	Location Accuracy ^(*) (fast-moving beacon)	M/N \geq 0.95 (TBD km)	2.3.3.4		M	Within 10 minutes – Configuration 5	TBD	TBD
		M/N \geq 0.98 (TBD km)	2.3.3.4		M	Within 10 minutes – Configuration 5	TBD	TBD
	Processing Bandwidth	406.006 to 406.094 MHz	n/a		D			
	Acquisition Frequency Range	Beacon with a deviation from the center frequency of ± 5.45 kHz	n/a		D			
5.10	Expected Horizontal Error / Quality Factor	Prediction Accuracy NC _{1/10} /NL < 0.15 0.93 \leq NC ₁ /NL \leq 0.97 NC ₂ /NL < 0.01	2.3.3.5		M		EHE results must be provided for factory and on-site tests, as appropriate	
	Processing Anomalies	$< 1 \times 10^{-4}$	2.3.3.6		M	Processing anomalies that consist of a single burst from a single satellite shall be identified separately.		
5.11	Expected Horizontal Error / Quality Factor	Prediction Accuracy NC _{1/10} /NL < 0.15 0.93 \leq NC ₁ /NL \leq 0.97 NC ₂ /NL < 0.01	2.3.1.5		M		EHE results must be provided for factory and on-site tests, as appropriate	
5.11	Processing Anomalies	$< 1 \times 10^{-4}$	2.3.1.6		M	Processing anomalies that consist of a single burst from a single satellite shall be identified separately.		

Notes:

(#) Testing of Configuration 4 is not required for MEOLUT commissioning until the location accuracy performance and the test velocity (in brackets in Annex C) is confirmed for Configuration 4, but could be provided if available.

(*) Testing of Configuration 5 is not required for MEOLUT commissioning until the location accuracy performance requirement (noted TBD) is finalized.

Table A.3: MEOLUT Commissioning Summary Data Table (C/S T.018 Beacon Part)

Section in C/S T.019	Requirement or Test	Pass Criteria	Result or Report Ref	Pass/Fail	Method of Compliance	Declaration / Verification or Comments	Facility (F) or Installation Site (S)	Prior Results (P) or not
4.2.2	Beacon Message Recovery - MR1	See Annex D.1	3.2.1		M		<i>F</i>	<i>P</i>
	Beacon Message Recovery - MR2	See Annex D.1	3.2.1		M		<i>F</i>	<i>P</i>
4.2.3.2	Bit Verification - BV1	See Annex D.1	3.2.2		M		<i>F</i>	<i>P</i>
4.2.5.2	Invalid Message Processing – IMP1	See Annex D.1	3.2.3		M		<i>F</i>	<i>P</i>
4.2.6.2	Message Association - MA1	See Annex D.1	3.2.4		M		<i>F</i>	<i>P</i>
4.2.6.1 and 4.2.11	Return Link Test – RL1	See Annex D.1	3.2.5		M		<i>F</i>	<i>P</i>
4.2.11	Transmitting Data to the MCC	n/a	n/a		V	Using MCC message log table as defined in Annex E.		
			3.2.6		M	For C/S T.018 ELT(DT) beacons using script in section D.3.4.2.	<i>F</i>	<i>P</i>
5.1	RF Signal Margin	n/a	n/a		D			
5.2.2	Signal Sensitivity	Signal sensitivity better than 30.55 dB-Hz			D			
5.3.2	Beacon Message Detection Probability Partially Overlapping Bursts	T>0.95	3.3.1.1		M	Also provide the single-burst location probability for information only – <i>Configuration 1</i>	<i>F</i>	<i>P</i>
	Beacon Message Detection Probability (nearly-static beacon)	T≥0.999	3.3.1.2		M	After 30 seconds - Configuration 1	<i>S</i>	<i>No</i>
					M	After 30 seconds - Configuration 2	<i>F</i>	<i>P</i>
	Beacon Message Detection Probability ((low speed) slow-moving beacon)	T≥0.999	3.3.1.2		M	After 30 seconds - Configuration 3.1 ^(##)	<i>F</i>	<i>P</i>
					M	After 30 seconds - Configuration 3.2	<i>F</i>	<i>P</i>
	Beacon Message Detection Probability ^(#) ((medium speed) slow-moving beacon)	T≥0.999	3.3.1.2		M	After 30 seconds - Configuration 4	<i>F</i>	<i>P</i>
	Beacon Message Detection Probability ^(*) (fast-moving beacon)	T≥0.999	3.3.1.2		M	After 30 seconds - Configuration 5	<i>TBD</i>	<i>TBD</i>
	Beacon Message Detection Probability (ELT(DT))	T>0.99	3.3.1.3		<i>M</i>	Within any 1 minute period	<i>S</i>	<i>No</i>
5.4.1.2, 5.4.2.2	Probability of FDOA/TDOA Location (nearly-static beacon)	PDL≥0.95	3.3.1.4		M	Single burst - Configuration 1	<i>S</i>	<i>No</i>
					M	Single burst - Configuration 2	<i>F</i>	<i>P</i>
		PDL≥0.98	3.3.1.4		M	Within 30 seconds - Configuration 1	<i>S</i>	<i>No</i>
					M	Within 30 seconds - Configuration 2	<i>F</i>	<i>P</i>
		PDL≥0.98	3.3.1.4		M	Within 5 minutes - Configuration 1	<i>S</i>	<i>No</i>
					M	Within 5 minutes - Configuration 2	<i>F</i>	<i>P</i>
		PDL≥0.98	3.3.1.4		M	Within 30 minutes - Configuration 1	<i>S</i>	<i>No</i>
					M	Within 30 minutes - Configuration 2	<i>F</i>	<i>P</i>
5.4.1.2, 5.4.2.2	Probability of FDOA/TDOA Location	PDL≥0.95	3.3.1.4		M	Single burst - Configuration 3.1 ^(##)	<i>F</i>	<i>P</i>
					M	Single burst - Configuration 3.2	<i>F</i>	<i>P</i>

Section in C/S T.019	Requirement or Test	Pass Criteria	Result or Report Ref	Pass/Fail	Method of Compliance	Declaration / Verification or Comments	Facility (F) or Installation Site (S)	Prior Results (P) or not
	((low speed) slow-moving beacon)	PDL \geq 0.98	3.3.1.4		M	Within 30 seconds - Configuration 3.1 ^(##)	F	P
					M	Within 30 seconds - Configuration 3.2	F	P
		PDL \geq 0.98	3.3.1.4		M	Within 5 minutes - Configuration 3.1 ^(##)	F	P
					M	Within 5 minutes - Configuration 3.2	F	P
5.4.1.2, 5.4.2.2	Probability of FDOA/TDOA Location ^(#) ((medium speed) slow-moving beacon)	PDL \geq 0.95	3.3.1.4		M	Single burst - Configuration 4	F	P
		PDL \geq 0.98	3.3.1.4		M	Within 30 seconds - Configuration 4	F	P
		PDL \geq 0.98	3.3.1.4		M	Within 5 minutes - Configuration 4	F	P
5.4.1.2, 5.4.2.2	Probability of FDOA/TDOA Location ^(*) (fast-moving beacon)	PDL \geq 0.95	3.3.1.4		M	Single burst - Configuration 5	TBD	TBD
		PDL \geq 0.98	3.3.1.4		M	Within 30 seconds - Configuration 5	TBD	TBD
		PDL \geq 0.98	3.3.1.4		M	Within 5 minutes - Configuration 5	TBD	TBD
5.5	Capacity	100 beacons	n/a		D			
5.6.2	Location Accuracy (nearly-static beacon)	M/N \geq 0.95 (5 km)	3.3.1.5		M	Single Burst - Configuration 1	S	No
					M	Single Burst - Configuration 2	F	P
		M/N \geq 0.97 (5 km)	3.3.1.5		M	Within 30 seconds - Configuration 1	S	No
					M	Within 30 seconds - Configuration 2	F	P
		M/N \geq 0.97 (1 km)	3.3.1.5		M	Within 5 minutes - Configuration 1	S	No
					M	Within 5 minutes - Configuration 2	F	P
		M/N \geq 0.97 (0.1 km)	3.3.1.5		M	After 30 minutes - Configuration 1 ^(†)	S	No
					M	After 30 minutes - Configuration 2 ^(†)	F	P
5.6.4	Location Accuracy ((low speed) slow-moving beacon)	M/N \geq 0.95 (5 km)	3.3.1.5		M	Single Burst - Configuration 3.1 ^(##)	F	P
			3.3.1.5		M	Single Burst - Configuration 3.2	F	P
		M/N \geq 0.97 (5 km)	3.3.1.5		M	Within 30 seconds - Configuration 3.1 ^(##)	F	P
			3.3.1.5		M	Within 30 seconds - Configuration 3.2	F	P
		M/N \geq 0.97 (1 km)	3.3.1.5		M	Within 5 minutes - Configuration 3.1 ^(##)	F	P
			3.3.1.5		M	Within 5 minutes - Configuration 3.2	F	P
5.6.6	Location Accuracy ^(#) ((medium speed) slow-moving beacon)	M/N \geq 0.95 (5 km)	3.3.1.5		M	Single Burst - Configuration 4	F	P
		M/N \geq 0.97 (5 km)	3.3.1.5		M	Within 30 seconds - Configuration 4	F	P
		M/N \geq 0.97 (1 km)	3.3.1.5		M	Within 5 minutes - Configuration 4	F	P
5.6.8	Location Accuracy ^(*) (fast-moving beacon)	M/N \geq 0.95 (TBD km)	3.3.1.5		M	Single Burst - Configuration 5	TBD	TBD
		M/N \geq 0.97 (TBD km)	3.3.1.5		M	Within 30 seconds - Configuration 5	TBD	TBD
		M/N \geq 0.97 (TBD km)	3.3.1.5		M	Within 5 minutes - Configuration 5	TBD	TBD
5.7.1	Processing Bandwidth	406.006 to 406.094 MHz	n/a		D			
5.7.2	Acquisition Frequency Range	Beacon center frequency in the range 406.05 MHz \pm 1.65 kHz	n/a		D			
5.8.1.2	TOA/FOA Measurement Accuracy	TOA _o $<$ [1] μ sec TOA _{bias} $<$ [0.2] μ sec FOA _o $<$ [0.2] Hz FOA _{bias} $<$ [0.02] Hz	3.3.2.7		M	Only applicable to MEOLUTs which will provide data to other MEOLUTs [30.55] dBHz $<$ C/N ₀ $<$ [33.55] dBHz	F	P
5.8.2	External Data Processing	C/S T.019 sections 4.2.10 and 5			D	Only applicable to MEOLUTs which process data from other MEOLUTs		

Section in C/S T.019	Requirement or Test	Pass Criteria	Result or Report Ref	Pass/ Fail	Method of Compliance	Declaration / Verification or Comments	Facility (F) or Installation Site (S)	Prior Results (P) or not
	Transmitting Data to the MCC	n/a	n/a	V	Using MCC message log table as defined in Annex E			
			3.2.6	M	For C/S T.018 ELT(DT) beacons using script in section D.3.4.2.		F	P
	RF Signal Margin	n/a	n/a	D				
	Signal Sensitivity	Signal sensitivity better than 30.55 dB-Hz		D				
	Beacon Message Detection Probability Partially Overlapping Bursts	T>0.95	3.3.1.1	M	Also provide the single-burst location probability for information only		F	P
	Beacon Message Detection Probability	T≥0.999	3.3.2.2	M	After 30 seconds - Configuration 1		S	No
				M	After 30 seconds - Configuration 2		F	P
	Beacon Message Detection Probability ((low speed) slow-moving beacon)	T≥0.999	3.3.1.2	M	After 30 seconds - Configuration 3.1 ^(##)		F	P
				M	After 30 seconds - Configuration 3.2		F	P
	Beacon Message Detection Probability ^(#) ((medium speed) slow-moving beacon)	T≥0.999	3.3.1.2	M	After 30 seconds - Configuration 4		F	P
	Beacon Message Detection Probability ^(*) (fast-moving beacon)	T≥0.999	3.3.1.2	M	After 30 seconds - Configuration 5		TBD	TBD
	Beacon Message Detection Probability (ELT(DT))	T>0.99	3.3.2.3	M	Within any 1 minute period		S	No
	Probability of FDOA/TDOA Location (nearly-static beacon)	PDL≥0.95	3.3.2.4	M	Single burst - Configuration 1		S	No
				M	Single burst - Configuration 2		F	P
		PDL≥0.98	3.3.2.4	M	Within 30 seconds - Configuration 1		S	No
				M	Within 30 seconds - Configuration 2		F	P
		PDL≥0.98	3.3.2.4	M	Within 5 minutes - Configuration 1		S	No
				M	Within 5 minutes - Configuration 2		F	P
		PDL≥0.98	3.3.2.4	M	Within 30 minutes - Configuration 1		S	No
				M	Within 30 minutes - Configuration 2		F	P
	Probability of FDOA/TDOA Location ((low speed) slow-moving beacon)	PDL≥0.95	3.3.1.4	M	Single burst - Configuration 3.1 ^(##)		F	P
				M	Single burst - Configuration 3.2		F	P
		PDL≥0.98	3.3.1.4	M	Within 30 seconds - Configuration 3.1 ^(##)		F	P
				M	Within 30 seconds - Configuration 3.2		F	P
		PDL≥0.98	3.3.1.4	M	Within 5 minutes - Configuration 3.1 ^(##)		F	P
				M	Within 5 minutes - Configuration 3.2		F	P
	Probability of FDOA/TDOA Location ^(#) ((medium speed) slow-moving beacon)	PDL≥0.95	3.3.1.4	M	Single burst - Configuration 4		F	P
		PDL≥0.98	3.3.1.4	M	Within 30 seconds - Configuration 4		F	P
		PDL≥0.98	3.3.1.4	M	Within 5 minutes - Configuration 4		F	P
	Probability of FDOA/TDOA Location ^(*) (fast-moving beacon)	PDL≥0.95	3.3.1.4	M	Single burst - Configuration 5		TBD	TBD
		PDL≥0.98	3.3.1.4	M	Within 30 seconds - Configuration 5		TBD	TBD
		PDL≥0.98	3.3.1.4	M	Within 5 minutes - Configuration 5		TBD	TBD
	Capacity	100 beacons	n/a	D				
			3.3.2.5	M	Single Burst - Configuration 1		S	No

Section in C/S T.019	Requirement or Test	Pass Criteria	Result or Report Ref	Pass/Fail	Method of Compliance	Declaration / Verification or Comments	Facility (F) or Installation Site (S)	Prior Results (P) or not
	Location Accuracy (nearly-static beacon)	M/N \geq 0.95 (5 km)			M	Single Burst - Configuration 2	F	P
		M/N \geq 0.97 (5 km)	3.3.2.5		M	Within 30 seconds - Configuration 1	S	No
					M	Within 30 seconds - Configuration 2	F	P
		M/N \geq 0.97 (1 km)	3.3.2.5		M	Within 5 minutes - Configuration 1	S	No
					M	Within 5 minutes - Configuration 2	F	P
		M/N \geq 0.97 (0.1 km)	3.3.2.5		M	After 30 minutes - Configuration 1 ^(†)	S	No
					M	After 30 minutes - Configuration 2 ^(†)	F	P
	Location Accuracy ((low speed) slow-moving beacon)	M/N \geq 0.95 (5 km)	3.3.2.5		M	Single Burst - Configuration 3.1 ^(##)	F	P
			3.3.2.5		M	Single Burst - Configuration 3.2	F	P
		M/N \geq 0.97 (5 km)	3.3.2.5		M	Within 30 seconds - Configuration 3.1 ^(##)	F	P
			3.3.2.5		M	Within 30 seconds - Configuration 3.2	F	P
		M/N \geq 0.97 (1 km)	3.3.2.5		M	Within 5 minutes - Configuration 3.1 ^(##)	F	P
			3.3.2.5		M	Within 5 minutes - Configuration 3.2	F	P
	Location Accuracy ^(#) ((medium speed) slow-moving beacon)	M/N \geq 0.95 (5 km)	3.3.2.5		M	Single Burst - Configuration 4	F	P
		M/N \geq 0.97 (5 km)	3.3.2.5		M	Within 30 seconds - Configuration 4	F	P
		M/N \geq 0.97 (1 km)	3.3.2.5		M	Within 5 minutes - Configuration 4	F	P
	Location Accuracy ^(*) (fast-moving beacon)	M/N \geq 0.95 (TBD km)	3.3.2.5		M	Single Burst - Configuration 5	TBD	TBD
		M/N \geq 0.97 (TBD km)	3.3.2.5		M	Within 30 seconds - Configuration 5	TBD	TBD
		M/N \geq 0.97 (TBD km)	3.3.2.5		M	Within 5 minutes - Configuration 5	TBD	TBD
	Processing Bandwidth	406.006 to 406.094 MHz	n/a		D			
	Acquisition Frequency Range	Beacon center frequency in the range 406.05 MHz \pm 1.65 kHz	n/a		D			
	Expected Horizontal Error / Quality Factor ^(‡)	Prediction Accuracy $NC_{1/10}/NL < 0.15$ $0.93 \leq NC_1/NL \leq 0.97$ $NC_2/NL < 0.01$	3.3.2.6		M		<i>EHE results must be provided for factory and on-site tests, as appropriate</i>	
	Processing Anomalies ^(§)	$< 1 \times 10^{-4}$	3.3.2.8		M	Processing anomalies that consist of a single burst from a single satellite shall be identified separately.	S	No
5.9	Combined Processing	C/S T.019 sections 4.2.10 and 5			D	Only applicable to MEOLUTs which use non-MEOSAR C/S satellites.		
	Transmitting Data to the MCC	n/a	n/a		V	Using MCC message log table as defined in Annex E		
			3.2.6		M	For C/S T.018 ELT(DT) beacons using script in section D.3.4.2.	F	P
	RF Signal Margin	n/a	n/a		D			
	Signal Sensitivity	Signal sensitivity better than 30.55 dB-Hz			D			
	Beacon Message Detection Probability Partially Overlapping Bursts	T >0.95	3.3.1.1		M	Also provide the single-burst location probability for information only	F	P

Section in C/S T.019	Requirement or Test	Pass Criteria	Result or Report Ref	Pass/ Fail	Method of Compliance	Declaration / Verification or Comments	Facility (F) or Installation Site (S)	Prior Results (P) or not
	Beacon Message Detection Probability (nearly-static beacon)	$T \geq 0.999$	3.3.3.2		M	After 30 seconds - Configuration 1	S	No
					M	After 30 seconds - Configuration 2	F	P
	Beacon Message Detection Probability ((low speed) slow-moving beacon)	$T \geq 0.999$	3.3.1.3		M	After 30 seconds - Configuration 3.1 ^(##)	F	P
					M	After 30 seconds - Configuration 3.2	F	P
	Beacon Message Detection Probability ^(#) ((medium speed) slow-moving beacon)	$T \geq 0.999$	3.3.1.2		M	After 30 seconds - Configuration 4	F	P
	Beacon Message Detection Probability ^(*) (fast-moving beacon)	$T \geq 0.999$	3.3.1.2		M	After 30 seconds - Configuration 5	TBD	TBD
	Beacon Message Detection Probability (ELT(DT))	$T > 0.99$	3.3.3.3		M	Within any 1 minute period	S	No
Probability of FDOA/TDOA Location (nearly-static beacon)		$PDL \geq 0.95$	3.3.3.4		M	Single burst - Configuration 1	S	No
					M	Single burst - Configuration 2	F	P
		$PDL \geq 0.98$	3.3.3.4		M	Within 30 seconds - Configuration 1	S	No
					M	Within 30 seconds - Configuration 2	F	P
		$PDL \geq 0.98$	3.3.3.4		M	Within 5 minutes - Configuration 1	S	No
					M	Within 5 minutes - Configuration 2	F	P
		$PDL \geq 0.98$	3.3.3.4		M	Within 30 minutes - Configuration 1	S	No
					M	Within 30 minutes - Configuration 2	F	P
Probability of FDOA/TDOA Location ((low speed) slow-moving beacon)		$PDL \geq 0.95$	3.3.1.4		M	Single burst - Configuration 3.1 ^(##)	F	P
					M	Single burst - Configuration 3.2	F	P
		$PDL \geq 0.98$	3.3.1.4		M	Within 30 seconds - Configuration 3.1 ^(##)	F	P
					M	Within 30 seconds - Configuration 3.2	F	P
		$PDL \geq 0.98$	3.3.1.4		M	Within 5 minutes - Configuration 3.1 ^(##)	F	P
					M	Within 5 minutes - Configuration 3.2	F	P
Probability of FDOA/TDOA Location ^(#) ((medium speed) slow-moving beacon)	$PDL \geq 0.95$	3.3.1.4			M	Single burst - Configuration 4	F	P
	$PDL \geq 0.98$	3.3.1.4			M	Within 30 seconds - Configuration 4	F	P
	$PDL \geq 0.98$	3.3.1.4			M	Within 5 minutes - Configuration 4	F	P
Probability of FDOA/TDOA Location ^(*) (fast-moving beacon)	$PDL \geq 0.95$	3.3.1.4			M	Single burst - Configuration 5	TBD	TBD
	$PDL \geq 0.98$	3.3.1.4			M	Within 30 seconds - Configuration 5	TBD	TBD
	$PDL \geq 0.98$	3.3.1.4			M	Within 5 minutes - Configuration 5	TBD	TBD
Capacity	100 beacons	n/a		D				
Location Accuracy (nearly-static beacon)	$M/N \geq 0.95$ (5 km)	3.3.3.5			M	Single Burst - Configuration 1	S	No
					M	Single Burst - Configuration 2	F	P
	$M/N \geq 0.97$ (5 km)	3.3.3.5			M	Within 30 seconds - Configuration 1	S	No
					M	Within 30 seconds - Configuration 2	F	P
Location Accuracy ((low speed) slow-moving beacon)	$M/N \geq 0.97$ (1 km)	3.3.3.5			M	Within 5 minutes - Configuration 1	S	No
					M	Within 5 minutes - Configuration 2	F	P
	$M/N \geq 0.97$ (0.1 km)	3.3.3.5			M	After 30 minutes - Configuration 1 ^(†)	S	No
					M	After 30 minutes - Configuration 2 ^(†)	F	P
	$M/N \geq 0.95$ (5 km)	3.3.3.5			M	Single Burst - Configuration 3.1 ^(##)	F	P
					M	Within 30 seconds - Configuration 3.2	F	P
	$M/N \geq 0.97$ (5 km)	3.3.3.5			M	Within 30 seconds - Configuration 3.1 ^(##)	F	P

Section in C/S T.019	Requirement or Test	Pass Criteria	Result or Report Ref	Pass/ Fail	Method of Compliance	Declaration / Verification or Comments	Facility (F) or Installation Site (S)	Prior Results (P) or not
			3.3.3.5		M	Within 30 seconds - Configuration 3.2	F	P
			M/N \geq 0.97 (1 km)	3.3.3.5	M	Within 5 minutes - Configuration 3.1 ^(##)	F	P
				3.3.3.5	M	Within 5 minutes - Configuration 3.2	F	P
	Location Accuracy ^(#) (medium speed) slow-moving beacon	M/N \geq 0.95 (5 km)	3.3.3.5		M	Single Burst - Configuration 4	F	P
		M/N \geq 0.97 (5 km)	3.3.3.5		M	Within 30 seconds - Configuration 4	F	P
		M/N \geq 0.97 (1 km)	3.3.3.5		M	Within 5 minutes - Configuration 4	F	P
	Location Accuracy ^(*) (fast-moving beacon)	M/N \geq 0.95 (TBD km)	3.3.3.5		M	Single Burst - Configuration 5	TBD	TBD
		M/N \geq 0.97 (TBD km)	3.3.3.5		M	Within 30 seconds - Configuration 5	TBD	TBD
		M/N \geq 0.97 (TBD km)	3.3.3.5		M	Within 5 minutes - Configuration 5	TBD	TBD
	Processing Bandwidth	406.006 to 406.094 MHz	n/a		D			
	Acquisition Frequency Range	Center frequency in the range 406.05 MHz \pm 1.65 kHz	n/a		D			
	Expected Horizontal Error / Quality Factor ^(†)	Prediction Accuracy NC _{1/10} /NL < 0.15 0.93 \leq NC ₁ /NL \leq 0.97 NC ₂ /NL < 0.01	3.3.3.6		M		<i>EHE results must be provided for factory and on-site tests, as appropriate</i>	
	Processing Anomalies ^(‡)	<1x10 ⁻⁴	3.3.3.7		M	Processing anomalies that consist of a single burst from a single satellite shall be identified separately.	S	No
5.10	Expected Horizontal Error / Quality Factor ^(‡)	Prediction Accuracy NC _{1/10} /NL < 0.15 0.93 \leq NC ₁ /NL \leq 0.97 NC ₂ /NL < 0.01	3.3.1.6		M		<i>EHE results must be provided for factory and on-site tests, as appropriate</i>	
5.11	Processing Anomalies ^(‡)	<1x10 ⁻⁴	3.3.1.7		M	Processing anomalies that consist of a single burst from a single satellite shall be identified separately.	S	No

Notes:

(#) Testing of Configuration 4 is not required for MEOLUT commissioning until the test velocity (in brackets) is finalized for Configuration 4, but could be provided if available.

(*) Testing of Configuration 5 is not required for MEOLUT commissioning until the location accuracy performance requirement (noted TBD) is finalized.

(†) Testing of Configurations 1 and 2 shall be performed and results reported in the MEOLUT commissioning report. For MEOLUTs that commence commissioning (see document C/S P.011 at footnote 1, page 5-8) prior to ~~24-15 October 2025-2026~~ (scheduled end of CSC-~~7375~~) this will not be a pass/fail criteria. JC-~~39-40~~ is expected to review and make recommendations to the Council concerning this specification, a possible extension of this waiver of the “pass” requirement and/or whether and when the MEOLUT may be required to undergo a partial recommissioning to demonstrate “pass” compliance. The Council at its scheduled October ~~2025-2026~~ session is anticipated to consider the recommendations of JC-~~39-40~~ and make decisions on these matters accordingly.

(‡) The EHE test shall be performed and results reported in the MEOLUT commissioning report. For MEOLUTs that commence commissioning (see document C/S P.011 at footnote 1, page 5-8) prior to ~~24-15 October 2025-2026~~ (scheduled end of CSC-~~7475~~) this will not be a pass/fail criteria. JC-~~39-40~~ is expected to review and make recommendations to the Council concerning this specification, a possible extension of this waiver of the “pass” requirement and/or whether and when the MEOLUT may be required to undergo a partial recommissioning to demonstrate “pass” compliance. The Council at its scheduled October ~~2025-2026~~ session is anticipated to consider the recommendations of JC-~~39-40~~ and make decisions on these matters accordingly.

(+) The processing anomaly test shall be performed and results reported in the MEOLUT commissioning report. For MEOLUTs that commence commissioning (see document C/S P.011 at footnote 1, page 5-8) prior to ~~24-15~~ October ~~2025-2026~~ (scheduled end of CSC-~~7375~~) this will not be a pass/fail criteria. JC-~~3940~~ is expected to review and make recommendations to the Council concerning this specification, a possible extension of this waiver of the “pass” requirement and/or whether and when the MEOLUT may be required to undergo a partial recommissioning to demonstrate “pass” compliance. The Council at its scheduled October ~~2025-2026~~ session is anticipated to consider the recommendations of JC-~~39-40~~ and make decisions on these matters accordingly.

(##) Testing of configuration 3.1 is not required for commissioning of the MEOLUT SGB capability.

A.2 Results of Measurements

This section contains the detailed results of measurements summarized in section A.1. Each of the requirements is referred to in the report by the report reference number. The test procedure column identifies the reference in this document, where the detailed test procedure and pass/fail criteria are provided.

General part

Report Ref #	Title	Test Procedure
2.1	Operational Requirements	
2.1.1	MEOLUT Data Availability (A)	B.1

C/S T.001 Beacons

Report Ref #	Title	Test Procedure
2.2	Functional and Processing Requirements	
2.2.1	Bit Rate Tolerance Check	D.1.2
2.2.2	Bit Verification (test code sequence BV1 - BV2 - BV3)	D.2.1
2.2.3	Beacon Message Validation (test code sequence MV1 - MV2 - MV5 - MV6)	D.2.1
2.2.4	Invalid Message Processing (test code sequence IMP1)	D.2.1
2.2.5	Beacon Message Processing (test code sequence LP1 - LP2 - LP3 - LP4)	D.2.1
2.2.6	Return Link Test (test code sequence RL1)	D.2.1
2.2.7	Multiple valid message processing	
2.2.8	C/S T.001 ELT(DT) functional validation script	D.3.2.2
2.3	Performance Requirements	
2.3.1	Stand Alone Statistics	
2.3.1.1	Beacon Detection Probability (T) Non ELT(DT) Beacons	C.2.1
2.3.1.2	Beacon Detection Probability (T) ELT(DT) Beacons	C.2.2
2.3.1.3	Probability of DOA Location (PDL)	C.2.3
2.3.1.4	Location Accuracy	C.2.4
2.3.1.5	Expected Horizontal Error / Quality Factor	C.2.6
2.3.1.6	Processing Anomalies	C.2.7
2.3.2	MEOLUT Data Exchange	
2.3.2.1	Beacon Detection Probability (T) Non ELT(DT) Beacons	C.2.1
2.3.2.2	Beacon Detection Probability (T) ELT(DT) Beacons	C.2.2
2.3.2.3	Probability of DOA Location (PDL)	C.2.3
2.3.2.4	Location Accuracy	C.2.4
2.3.2.5	Expected Horizontal Error / Quality Factor	C.2.5
2.3.2.6	TOA/FOA Measurement Accuracy	C.2.6
2.3.2.7	Processing Anomalies	C.2.7
2.3.3	Combined Non-MEOSAR Satellite Statistics	
2.3.3.1	Beacon Detection Probability (T) Non ELT(DT) Beacons	C.2.1
2.3.3.2	Beacon Detection Probability (T) ELT(DT) Beacons	C.2.2
2.3.3.3	Probability of DOA Location (PDL)	C.2.3
2.3.3.4	Location Accuracy	C.2.4
2.3.3.5	Expected Horizontal Error / Quality Factor	C.2.6
2.3.3.6	Processing Anomalies	C.2.7

C/S T.018 Beacons

Report Ref #	Title	Test Procedure
3.1	Operational Requirements (same as 2.1)	
3.2	Functional and Processing Requirements	
3.2.1	Message Recovery (test code sequence MR1 - MR2)	D.2.2
3.2.2	Bit Verification (test code sequence BV1)	D.2.2
3.2.3	Invalid Message Processing (test code sequence IMP1)	D.2.2
3.2.4	Message Association (test code sequence MA1)	D.2.2
3.2.5	Return Link Test (test code sequence RL1)	D.2.2
3.2.6	C/S T.018 ELT(DT) functional validation script	D.3.4.2
3.3	Performance Requirements	
3.3.1	Stand Alone Statistics	
3.3.1.1	Beacon Detection Probability (T(OB)) Partially Overlapping Bursts	C.3.1
3.3.1.2	Beacon Detection Probability (T) Non ELT(DT) Beacons	C.3.2
3.3.1.3	Beacon Detection Probability (T) ELT(DT) Beacons	C.3.3
3.3.1.4	Probability of DOA Location (PDL)	C.3.4
3.3.1.5	Location Accuracy	C.3.5
3.3.1.6	Expected Horizontal Error / Quality Factor	C.3.6
3.3.1.7	Processing Anomalies	C.3.7
3.3.2	MEOLUT Data Exchange	
3.3.2.1	Beacon Detection Probability (T(OB)) Partially Overlapping Bursts	C.3.1
3.3.2.2	Beacon Detection Probability (T) Non ELT(DT) Beacons	C.3.2
3.3.2.3	Beacon Detection Probability (T) ELT(DT) Beacons	C.3.3
3.3.2.4	Probability of DOA Location (PDL)	C.3.4
3.3.2.5	Location Accuracy	C.3.5
3.3.2.6	Expected Horizontal Error / Quality Factor	C.3.6
3.3.2.7	TOA/FOA Measurement Accuracy	C.3.7
3.3.2.8	Processing Anomalies	C.3.8
3.3.3	Combined Non-MEOSAR Satellite Statistics	
3.3.3.1	Beacon Detection Probability (T(OB)) Partially Overlapping Bursts	C.3.1
3.3.3.2	Beacon Detection Probability (T) Non ELT(DT) Beacons	C.3.2
3.3.3.3	Beacon Detection Probability (T) ELT(DT) Beacons	C.3.3
3.3.3.4	Probability of DOA Location (PDL)	C.3.4
3.3.3.5	Location Accuracy	C.3.5
3.3.3.6	Expected Horizontal Error / Quality Factor	C.3.6
3.3.3.7	Processing Anomalies	C.3.8

Table A.4: MEOLUT Test Beacon Location Table

Beacon Number	Beacon Identifier	Longitude (Degrees East)	Latitude (Degrees North)	Altitude (metres)
1				
2				
3				
4				
5				
6				
7				
8				
...				
n				

A.3 MEOLUT Critical Changes Implementation

The implementation status of the MEOLUT critical changes decided by the Council shall be reported in Table A.5 provided in the MEOLUT commissioning report.

Table A.5: Implementation Status of MEOLUT Critical Changes

Reference	Brief Description	Status (Implemented/Not implemented/Date of future implementation)
MEOLUT-1		
MEOLUT-2		
...		
MEOLUT-N		

Appendix 1 - Technical File

A.1 General

This appendix defines LUT information to be provided by national Administrations for LUT commissioning. The following information is required as a minimum:

A.2 LUT Hardware Description

A.2.1 Antenna Characteristics

- a) number and type(s) of antennas
- b) gain/temperature ratio (G/T) at 5° elevation angle above the local horizon, and actual elevation angle at which the G/T was measured
- c) operational limitations
- d) dedicated or shared
- e) site-horizon profile
- f) operational-tracking (elevation) limits
- g) downlink frequency (S/L band)

Table A.6: MEOLUT Antenna Location Table

Antenna Number	Antenna Diameter (if applicable) (m)	Longitude (Degrees East)	Latitude (Degrees North)	Altitude (m)
1				
2				
3				
4				
5				
6				
7				
8				
...				
n				

A.2.2 General LUT Indoor Equipment Description

- a) equipment complement
- b) stand alone, shared, or collocated with MCC
- c) LUT manufacturer and model number
- d) status and alarm functions
- e) location – latitude, longitude, altitude

A.2.3 General Capabilities

- a) specific processing capability
- b) spectrum monitoring capability
- c) optional capabilities

A.3 Processing

- a) specific-performance capability
- b) manufacturer specifications
- c) processing bandwidth, signal sensitivity and beacon processing capacity of each data channel

A.4 Communications Capability – internal and external

- a) primary-mode configuration
- b) backup-mode configuration

A.5 Coverage Area

Describe the Declared Coverage Area of the MEOLUT system.

The description of the Declared Coverage Area shall be accompanied, if applicable, with the following:

- 1) Satellite tracking schedule used;
- 2) Description of DCA as:
 - a) the latitude and longitude values of the DCA contour, and/or
 - b) the coverage radius around the MEOLUT;
- 3) Graphical plots of performance analysis or simulation should:
 - a) Indicate the DCA,
 - b) Provide a legend of all colors and/or scales used;
- 4) Beacon characteristics including transmission pattern;
- 5) Simulation time period and step size;

- 6) Simulation grid size;
- 7) List the C/S T.019 performance requirements used as criteria to determine the DCA;
- 8) Performance and modelling assumptions and their dependencies, such as:
 - a) Detection performance as a function of elevation angle or received signal strength,
 - b) Standard deviation (1 sigma) TOA and FOA accuracy, as a function of beacon elevation angle or received signal strength,
 - c) A description of methodology used for location accuracy assessment at a given grid node (e.g., statistical EHE calculation or modelling of the complete detection and location process used by the MEOLUT);
- 9) A description of any empirical basis for performance assumptions such as type of test sources (beacon simulator or operational beacons).

A.6 MEOLUT Network

For a networked MEOLUT, this section shall include a list of all the other MEOLUTs that exchange data with this MEOLUT and their status (commissioned or not).

A.7 MEOLUT Designated Reference Beacons List

This section shall include the list of all designated QMS reference beacons, as described in document C/S A.003, that are planned for use for the QMS of the MEOLUT¹.

- END OF ANNEX A -

¹ A list of available designated QMS reference beacons is available on the Cospas-Sarsat website.

ANNEX B**STATISTICS FOR OPERATIONAL REQUIREMENTS****B.1 MEOLUT Data Availability (A)**

Measurement during the commissioning period

MEOLUT data availability measures the probability of receiving complete and accurate MEOLUT data at the MCC. Availability (A) is expressed as a percentage and is calculated by dividing the amount of operational time (OT) by the time required to be in operation (OTR). The time required to be in operation (OTR), expressed in hours, is 24 times the number of days in the commissioning period inclusive of all maintenance downtime. Downtime (DT) is that period of time when the performance of the MEOLUT is below the minimum requirements specified in document C/S T.019 over the Declared Coverage Area in the configuration for which the MEOLUT was commissioned. Therefore:

$$A = (OT / OTR) * 100 = (1 - (DT / OTR)) * 100 \text{ and shall be greater than 95.}$$

Prediction

A reliability analysis shall be performed and the results reported to verify that the MEOLUT will meet the availability requirement. The analysis shall be based on industry standard methodology using Mean Time Between Failure (MTBF) and Mean Time To Repair (MTTR) values for all the components and interfaces comprising the MEOLUT.

- END OF ANNEX B -

ANNEX C

STATISTICS FOR PERFORMANCE REQUIREMENTS

C.1 Commissioning Status

C.1.1 General

This annex describes the statistics to be provided to the Cospas-Sarsat Secretariat when commissioning a MEOLUT.

For the 406 MHz solution statistics, the report must include a list of all 406 MHz beacons used for the statistical data analysis.

C.2 C/S T.001 Beacon Statistics

C.2.1 Beacon Detection Probability (T)

Statistics will be generated using the test script identified in Annex D.3.1 to meet the following requirements:

Calculate:

$$T = N / B$$

where:

N = number of 10-minute windows for which the MEOLUT produced a valid message within 10 minutes from the first beacon message transmission for each beacon ID

B = total number of 10-minute windows (not overlapping) within the duration of the beacon activation period² for each beacon ID

The test script will be executed a minimum of four times producing a minimum of 1,200 bursts in 4x25=100 windows.

The value of T using data from all test beacon IDs shall be 0.99 or greater.

Detection Probability statistics shall be provided for each motion configuration defined in section C.2.4.

² A MEOLUT shall not use information from past 10-minute windows to improve beacon message detection in subsequent 10-minute windows (this might require a specific MEOLUT test set up to force a reset of the detection mechanism)

C.2.2 ELT(DT) Beacon Detection Probability (T(DT))

Statistics will be generated using the test script identified in Annex D.3.2.1 to meet the following requirements:

Calculate:

$$T(DT) = N / B$$

where:

N = number of 1-minute windows for which the MEOLUT produced at least one complete message for each beacon ID

B = total number of 1-minute windows (not overlapping) within the duration of the beacon activation period for each beacon ID

The value of T(DT) using data from all test beacon IDs shall be 0.99 or greater.

C.2.3 Probability of DOA Location (PDL)

Single Burst

Statistics will be generated using the test script identified in Annex D.3.1 to meet the following requirements:

$$PDL = M/N$$

where:

M = number of DOA single-burst locations produced by the MEOLUT for a test beacon, within three minutes of the single burst transmission

N = total number of beacon bursts transmitted by the test beacons

PDL shall be 0.90 or greater

Within 10 minutes

Statistics will be generated using the test script identified in Annex D.3.1 to meet the following requirements:

$$PDL = M/N$$

where:

M = number of beacons that produced a DOA location within 10 minutes from the first beacon message transmission

N = total number of test beacons (i.e., the maximum value of YY within the script)

PDL shall be 0.98 or greater.

A set of single-burst and 10-minute PDL statistics shall be provided for each motion configuration defined in section C.2.4.

C.2.4 Location Accuracy

For each DOA location solution used in generating the location performance statistics defined in the sections below, the associated location error shall be determined using the known beacon position at the time of the last burst used in the DOA location solution.

Single burst solutions

Statistics will be generated using the test script identified in Annex D.3.1 (the test script will be executed a minimum of four times producing a minimum of 1,200 bursts), or a test beacon for moving configurations to meet the following requirements:

Configuration 1: static beacon

M/N shall be greater than or equal to the following:

0.90 where:

M = number of solutions within 5 km

N = number of solutions

Configuration 2: nearly-static beacon (velocity = 0.4 m/s)

M/N shall be greater than or equal to the following:

0.90 where:

M = number of solutions within 5 km

N = number of solutions

Configuration 3.1: (low speed) slow-moving beacon (velocity = 2 m/s)

M/N shall be greater than or equal to the following:

0.70 where:

M = number of solutions within 10 km

N = number of solutions

0.95 where:

M = number of solutions within 20 km

N = number of solutions

Configuration 3.2: (low speed) slow-moving beacon (velocity = 5 m/s)

M/N shall be greater than or equal to the following:

0.70 where:

M = number of solutions within 10 km

N = number of solutions

0.95 where:

M = number of solutions within 20 km

N = number of solutions

Configuration 4³: (medium speed) slow-moving beacon (velocity = [5 to 10] m/s)

M/N shall be greater than or equal to the following:

0.70 where:

M = number of solutions within 10 km

³ Testing of Configuration 4 is not required for MEOLUT commissioning until the test velocity (in brackets) is finalized for Configuration 4, but could be provided if available.

N = number of solutions

0.95 where:

M = number of solutions within 20 km

N = number of solutions

Configuration 5⁴: fast-moving beacon (velocity > 10 m/s)

M/N shall be greater than or equal to the following:

0.90 where:

M = number of solutions within TBD km

N = number of solutions

For each configuration, a histogram for the location accuracy of the correct solutions shall be provided. The histogram shall be in 1 km increments from 0 to 20 km. All solutions with an error greater than 20 km shall be individually listed and an explanation for the error provided. The cumulative distribution function based on the histogram shall also be provided.

Solutions within 10 minutes

Statistics will be generated using the test script identified in Annex D.3.1, or a test beacon for moving configurations, to meet the following requirements:

Configuration 1: static beacon

M/N shall be greater than or equal to the following (M and N are solutions produced within 10 minutes from the first beacon message transmission):

0.95 where:

M = number of solutions within 5 km

N = number of solutions

0.98 where:

M = number of solutions within 10 km

N = number of solutions

Configuration 2: nearly-static beacon (velocity = 0.4 m/s)

M/N shall be greater than or equal to the following (M and N are solutions produced within 10 minutes from the first beacon message transmission):

0.95 where:

M = number of solutions within 5 km

N = number of solutions

0.98 where:

M = number of solutions within 10 km

N = number of solutions

⁴ Testing of Configuration 5 is not required for MEOLUT commissioning until the location accuracy performance requirement (noted TBD) is finalized.

Configuration 3.1: (low speed) slow-moving beacon (velocity = 2 m/s)

M/N shall be greater than or equal to the following) (M and N are solutions produced within 10 minutes from the first beacon message transmission):

0.75 where:

M = number of solutions within 5 km

N = number of solutions

0.95 where:

M = number of solutions within 7 km

N = number of solutions

Configuration 3.2: (low speed) slow-moving beacon (velocity = 5 m/s)

M/N shall be greater than or equal to the following) (M and N are solutions produced within 10 minutes from the first beacon message transmission):

0.75 where:

M = number of solutions within 5 km

N = number of solutions

0.95 where:

M = number of solutions within 7 km

N = number of solutions

Configuration 4⁵: (medium speed) slow-moving beacon (velocity = [5 to 10] m/s)

M/N shall be greater than or equal to the following:

0.70 where:

M = number of solutions within 10 km

N = number of solutions

0.95 where:

M = number of solutions within 20 km

N = number of solutions

Configuration 5⁶: fast-moving beacon (velocity > 10 m/s)

M/N shall be greater than or equal to the following) (M and N are solutions produced within 10 minutes from the first beacon message transmission):

0.95 where:

M = number of solutions within TBD km

N = number of solutions

0.98 where:

M = number of solutions within TBD km

N = number of solutions

For each configuration, a histogram for the location accuracy of the correct solutions shall be provided. The histogram shall be in 1 km increments from 0 to 20 km. All solutions with an error greater than

⁵ Testing of Configuration 4 is not required for MEOLUT commissioning until the test velocity (in brackets) is finalized for Configuration 4, but could be provided if available.

⁶ Testing of Configuration 5 is not required for MEOLUT commissioning until the location accuracy performance requirement (noted TBD) is finalized.

20 km shall be individually listed and an explanation for the error provided. The cumulative distribution function based on the histogram shall also be provided.

The location selection methodology, if any, used to generate the 10-minute location accuracy statistics shall be documented in the MEOLUT commissioning report⁷.

C.2.5 Expected Horizontal Error / Quality Factor

For each test configuration in section C.2.4, compare each beacon DOA location produced by the MEOLUT with the known location of the test beacon (at the time of the last burst used in the DOA location) to derive the actual location error.

Check that the Expected Horizontal Error is as follows:

$$NC_{1/10}/NL < 0.15$$

$$0.93 \leq NC_1/NL \leq 0.97$$

$$NC_2/NL < 0.01$$

With:

$NC_{1/10}$ = number of locations with a location error < EHE/10

NC_1 = number of locations with a location error < EHE

NC_2 = number of locations with a location error > 2 x EHE

NL = total number of locations

In addition to each test configuration, EHE results should be reported for different location categories (containing at least 1,000 locations each), in order to avoid any averaging effect of the results. These categories⁸ are:

- Single-burst locations for at least one static primary test beacons within the DCA,
- Single-burst locations for at least one primary test slow-moving beacon within the DCA,
- Multi-burst locations for at least one static primary test beacons within the DCA,
- Multi-burst locations for at least one primary test slow-moving beacon within the DCA,
- Locations for other available test beacons and for all active reference beacons located inside the DCA,
- Locations for at least one other test beacon if available and for all active reference beacons located outside the DCA, which were detected by the MEOLUT under test.

Plot the cumulative distribution of location error normalized by the EHE for each category tested from the above list. Include with each plot the EHE limit mask as illustrated in Figure C.1 below. In this figure, points 1, 2, 3 and 4 bound the EHE mask, and the dotted curve is an example of a hypothetical cumulative distribution plot that would meet the performance requirement. The reported cumulative distribution for each plot must pass below point 1, between points 2 and 3, and above point 4 in order to meet the required performance.

⁷ E.g., all locations produced by the MEOLUT are used, or locations with lowest EHE values over 10 minutes, or with higher number of bursts or satellites, or last solution received in the 10 minute window, other.

⁸ Testing for fast-moving beacon to be determined.

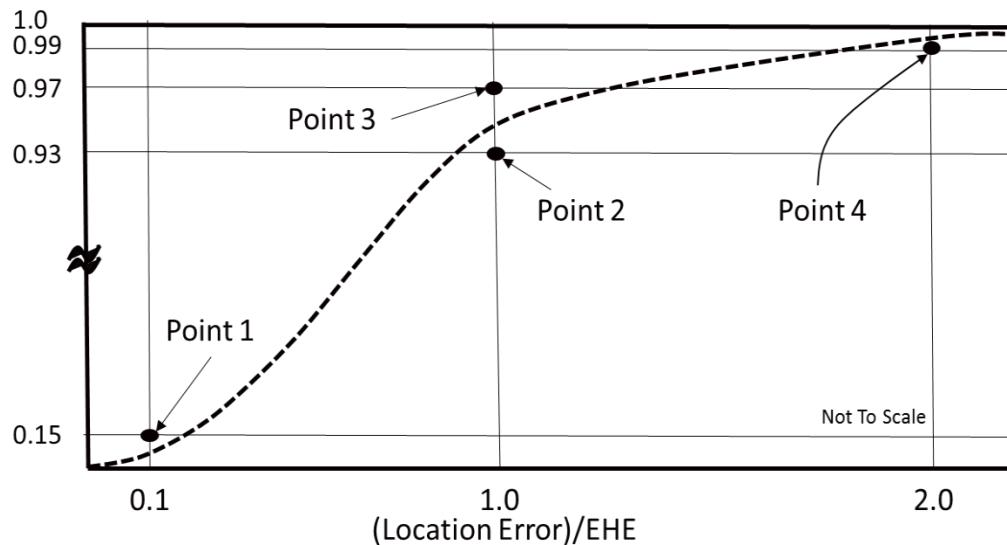


Figure C.1: (Location Error)/EHE Cumulative Distribution

C.2.6 TOA/FOA Measurement Accuracy

For each received beacon transmission received on each satellite channel:

1. Filter out beacon transmissions received with received C/N₀ less than 34.8 dBHz or greater than 37.8 dBHz.
2. Determine the TOA and FOA measurement error using the known beacon position.

From the beacon log data as defined in Annex E (in particular the transmission time and frequency of the transmitted bursts), calculate:

1. The standard deviation of the error of the TOA and FOA measurements for all filtered beacon messages.
2. The bias of the mean of the error of the TOA and FOA measurements.

The standard deviation of the error shall be:

Better than 25 microseconds for TOA

Better than 0.20 Hz for FOA

The bias of the mean of the error shall be:

Less than 2.5 microseconds for TOA

Less than 0.02 Hz for FOA

C.2.7 Processing Anomalies

From the beacon message data table (see section E.3), collect detected C/S T.001 beacon messages received on the transmitted test beacon frequency ± 2 kHz.

Count all messages (NM).

Count all anomalies (NA) which are defined as any beacon 15 hex ID that does not match exactly the 15 hex ID of the beacons known to transmit within the test beacon frequency \pm 2 kHz (e.g., test beacons, reference beacons, etc.).

Determine the probability (PA) to detect an anomaly:

$$PA = NA / NM$$

Check that PA is less than 10^{-4} .

C.3 C/S T.018 Beacon Statistics

C.3.1 Partially Overlapping Beacon Detection Probability (T(OB))

Statistics will be generated using the test script identified in Annex D.4.1.1 to meet the following requirements.:

Configuration 1: static beacon

Calculate:

$$T(OB) = N / B$$

where:

N = number of beacon messages for which the MEOLUT produced a valid message for each transmitted beacon ID

B = total number of beacon messages transmitted for each beacon ID

The value of T(OB) using data from all test beacon IDs shall be 0.95 or greater.

C.3.2 Beacon Detection Probability (T)

Statistics will be generated using the test script identified in Annex D.4.1.2 to meet the following requirements:

Calculate:

$$T = N / B$$

where:

N = number of 30-second windows for which the MEOLUT produced a valid message within 30-seconds from the first beacon message transmission for each beacon ID

B = total number of 30-second windows (not overlapping) within the duration of the beacon activation period for each beacon ID

The value of T using data from all test beacon IDs shall be 0.999 or greater.

Detection Probability statistics shall be provided for each motion configuration defined in section C.2.4.

C.3.3 ELT(DT) Beacon Detection Probability (T(DT))

Statistics will be generated using the test script identified in Annex D.4.2 to meet the following requirements:

Calculate:

$$T(DT) = N / B$$

where:

N = number of 1-minute windows for which the MEOLUT produced at least one valid message for each beacon ID

B = total number of 1-minute windows (not overlapping) within the duration of the beacon activation period for each beacon ID

The value of $T(DT)$ using data from all test beacon IDs shall be 0.99 or greater.

C.3.4 Probability of DOA Location (PDL)

Single Burst

Statistics will be generated using data resulting from the execution of all the test scripts identified in Annexes D.4.1.2, D.4.1.3, D.4.1.4 and D.4.1.5 to meet the following requirements:

$$PDL = M/N$$

where:

M = number of DOA single-burst locations produced by the MEOLUT for a test beacon, within three minutes of the single burst transmission.

N = total number of beacon messages transmitted by the test beacons

PDL shall be 0.95 or greater

Within 30 seconds

Statistics will be generated using the test script identified in Annex D.4.1.2 to meet the following requirements:

$$PDL = M/N$$

where:

M = number of beacons that produced a DOA location

N = total number of test beacons

PDL shall be 0.98 or greater.

Within 5 minutes

Statistics will be generated using the test script identified in Annex D.4.1.3 to meet the following requirements:

PDL = M/N

where:

M = number of beacons that produced a DOA location

N = total number of test beacons

PDL shall be 0.98 or greater.

Within 30 minutes

Statistics will be generated using the test script identified in Annex D.4.1.4 to meet the following requirements:

PDL = M/N

where:

M = number of beacons that produced a DOA location

N = total number of test beacons

PDL shall be 0.98 or greater.

A set of single-burst and 10-minute PDL statistics shall be provided for each motion configuration defined in section C.2.4.

C.3.5 Location Accuracy

For each DOA location solution used in generating the location performance statistics defined in the sections below, the associated location error shall be determined using the known beacon position at the time of the last burst used in the DOA location solution.

Single burst solutions

Statistics will be generated using data resulting from the execution of all the test scripts identified in Annexes D.4.1.2, D.4.1.3, D.4.1.4 and D.4.1.5 to meet the following requirements:

Configuration 1: static beacon

M/N shall be greater than or equal to the following:

0.95 where:

M = number of solutions within 5 km

N = number of solutions

Configuration 2: nearly-static beacon (velocity = 0.4 m/s)

M/N shall be greater than or equal to the following:

0.95 where:

M = number of solutions within 5 km

N = number of solutions

Configuration 3.1: (low speed) slow-moving beacon (velocity = 2 m/s)

M/N shall be greater than or equal to the following:

0.95 where:

M = number of solutions within 5 km

N = number of solutions

Configuration 3.2: (low speed) slow-moving beacon (velocity = 5 m/s)

M/N shall be greater than or equal to the following:

0.95 where:

M = number of solutions within 5 km

N = number of solutions

Configuration 4⁹: (medium speed) slow-moving beacon (velocity = [5 to 10] m/s)

M/N shall be greater than or equal to the following:

0.95 where:

M = number of solutions within 5 km

N = number of solutions

Configuration 5¹⁰: fast-moving beacon (velocity > 10 m/s)

M/N shall be greater than or equal to the following:

0.95 where:

M = number of solutions within TBD km

N = number of solutions

For each configuration, a histogram for the location accuracy of the correct solutions shall be provided. The histogram shall be in 1 km increments from 0 to 20 km. All solutions with an error greater than 20 km shall be individually listed and an explanation for the error provided. The cumulative distribution function based on the histogram shall also be provided.

Solutions within 30 seconds after beacon activation

Statistics will be generated using the test script identified in Annex D.4.1.2 to meet the following requirements:

Configuration 1: static beacon

M/N shall be greater than or equal to the following:

0.97 where:

M = number of solutions within 5 km

N = number of solutions

Configuration 2: nearly-static beacon (velocity = 0.4 m/s)

M/N shall be greater than or equal to the following:

0.97 where:

M = number of solutions within 5 km

⁹ Testing of Configuration 4 is not required for MEOLUT commissioning until the test velocity (in brackets) is finalized for Configuration 4, but could be provided if available.

¹⁰ Testing of Configuration 5 is not required for MEOLUT commissioning until the location accuracy performance requirement (noted TBD) is finalized.

N = number of solutions

Configuration 3.1: (low speed) slow-moving beacon (velocity = 2 m/s)

M/N shall be greater than or equal to the following:

0.97 where:

M = number of solutions within 5 km

N = number of solutions

Configuration 3.2: (low speed) slow-moving beacon (velocity = 5 m/s)

M/N shall be greater than or equal to the following) (M and N are solutions produced within 10 minutes from the first beacon message transmission):

0.97 where:

M = number of solutions within 5 km

N = number of solutions

Configuration 4¹¹: (medium speed) slow-moving beacon (velocity = [5 to 10] m/s)

M/N shall be greater than or equal to the following:

0.97 where:

M = number of solutions within 5 km

N = number of solutions

Configuration 5¹²: fast-moving beacon (velocity > 10 m/s)

M/N shall be greater than or equal to the following:

0.97 where:

M = number of solutions within TBD km

N = number of solutions

For each configuration, a histogram for the location accuracy of the correct solutions shall be provided. The histogram shall be in 1 km increments from 0 to 20 km. All solutions with an error greater than 20 km shall be individually listed and an explanation for the error provided. The cumulative distribution function based on the histogram shall also be provided.

Solutions within 5 minutes after beacon activation

Statistics will be generated using the test script identified in Annex D.4.1.3 to meet the following requirements:

Configuration 1: static beacon

M/N shall be greater than or equal to the following:

0.97 where:

M = number of solutions within 1 km

N = number of solutions

¹¹ Testing of Configuration 4 is not required for MEOLUT commissioning until the test velocity (in brackets) is finalized for Configuration 4, but could be provided if available.

¹² Testing of Configuration 5 is not required for MEOLUT commissioning until the location accuracy performance requirement (noted TBD) is finalized.

Configuration 2: nearly-static beacon (velocity = 0.4 m/s)

M/N shall be greater than or equal to the following:

0.97 where:

M = number of solutions within 1 km

N = number of solutions

Configuration 3.1: (low speed) slow-moving beacon (velocity = 2 m/s)

M/N shall be greater than or equal to the following:

0.97 where:

M = number of solutions within 1 km

N = number of solutions

Configuration 3.2: (low speed) slow-moving beacon (velocity = 5 m/s)

M/N shall be greater than or equal to the following) (M and N are solutions produced within 10 minutes from the first beacon message transmission):

0.97 where:

M = number of solutions within 1 km

N = number of solutions

Configuration 4¹³: (medium speed) slow-moving beacon (velocity = [5 to 10] m/s)

M/N shall be greater than or equal to the following:

0.97 where:

M = number of solutions within 1 km

N = number of solutions

Configuration 5¹⁴: fast-moving beacon (velocity > 10 m/s)

M/N shall be greater than or equal to the following:

0.97 where:

M = number of solutions within TBD km

N = number of solutions

For each configuration, a histogram for the location accuracy of the correct solutions shall be provided. The histogram shall be in 0.2 km increments from 0 to 10 km. All solutions with an error greater than 10 km shall be individually listed and an explanation for the error provided. The cumulative distribution function based on the histogram shall also be provided.

Solutions within 30 minutes after beacon activation

Statistics will be generated using the test script identified in Annex D.4.1.4 to meet the following requirements:

Configuration 1: static beacon

M/N shall be greater than or equal to the following:

¹³ Testing of Configuration 4 is not required for MEOLUT commissioning until the test velocity (in brackets) is finalized for Configuration 4, but could be provided if available.

¹⁴ Testing of Configuration 5 is not required for MEOLUT commissioning until the location accuracy performance requirement (noted TBD) is finalized.

0.97 where:

M = number of solutions within 0.1 km

N = number of solutions

Configuration 2: nearly-static beacon (velocity = 0.4 m/s)

M/N shall be greater than or equal to the following:

0.97 where:

M = number of solutions within 0.1 km

N = number of solutions

For each configuration, a histogram for the location accuracy of the correct solutions shall be provided. The histogram shall be in 20 m increments from 0 to 1 km. All solutions with an error greater than 1 km shall be individually listed and an explanation for the error provided. The cumulative distribution function based on the histogram shall also be provided.

Solutions after 30 minutes after beacon activation

Statistics will be generated using the test script identified in Annex D.4.1.5 to meet the following requirements:

M/N shall be greater than or equal to the following:

0.97 where:

M = number of solutions within 0.1 km

N = number of solutions

A histogram for the location accuracy of the correct solutions shall be provided. The histogram shall be in 20 m increments from 0 to 1 km. All solutions with an error greater than 1 km shall be individually listed and an explanation for the error provided. The cumulative distribution function based on the histogram shall also be provided.

The location selection methodology, if any, used to generate the 30-second, 5-minute and 30-minute location accuracy statistics shall be documented in the MEOLUT commissioning report¹⁵.

C.3.6 Expected Horizontal Error / Quality Factor

For each test configuration in section C.3.4, compare each beacon DOA location produced by the MEOLUT with the known location of the test beacon (at the time of the last burst used in the DOA location) to derive the actual location error.

Check that the Expected Horizontal Error is as follows:

$$NC_{1/10}/NL < 0.15$$

$$0.93 \leq NC_1/NL \leq 0.97$$

$$NC_2/NL < 0.01$$

With:

$$NC_{1/10} = \text{number of locations with a location error} < EHE/10$$

¹⁵ E.g., all locations produced by the MEOLUT are used, or locations with lowest EHE values over 30 seconds, 5 minutes and 30 minutes, or with higher number of bursts or satellites, or last solution received in the 30-second, 5-minute and 30-minute window, other.

NC_1 = number of locations with a location error < EHE

NC_2 = number of locations with a location error > $2 \times$ EHE

NL = total number of locations

In addition to each test configuration, EHE results should be reported for different location categories (containing at least 1,000 locations each), in order to avoid any averaging effect of the results. These categories¹⁶ are:

- Single-burst locations for at least one static primary test beacon within the DCA,
- Single-burst locations for at least one primary test slow-moving beacon within the DCA,
- Multi-burst locations for at least one static primary test beacon within the DCA,
- Multi-burst locations for at least one primary test slow-moving beacon within the DCA,
- Locations for other available test beacons and for all active reference beacons located inside the DCA,
- Locations for at least one other test beacon if available and for all active reference beacons located outside the DCA, which were detected by the MEOLUT under test.

Plot the cumulative distribution of location error normalized by the EHE for each category tested from the above list. Include with each plot the EHE limit mask as illustrated in Figure C.1 from section C.2.5. In this figure, points 1, 2, 3 and 4 bound the EHE mask, and the dotted curve is an example of a hypothetical cumulative distribution plot that would meet the performance requirement. The reported cumulative distribution for each plot must pass below point 1, between points 2 and 3, and above point 4 in order to meet the required performance.

C.3.7 TOA/FOA Measurement Accuracy

For each received beacon message:

1. Filter out messages with received C/N₀ less than [30.55] dBHz or greater than [33.55] dBHz.
2. Determine the TOA and FOA measurement error using the known beacon position.

From the beacon log data as defined in Annex E (in particular the transmission time and frequency of the transmitted bursts), calculate:

1. The standard deviation of the error of the TOA and FOA measurements for all filtered beacon messages.
2. The bias of the mean of the error of the TOA and FOA measurements.

The standard deviation of the error shall be:

Better than [1] microseconds for TOA

Better than [0.2] Hz for FOA

The bias of the mean of the error shall be:

Less than [0.2] microseconds for TOA

Less than [0.02] Hz for FOA

¹⁶ Testing for fast moving beacon to be determined.

C.3.8 Processing Anomalies

From the beacon message data table (see section E.3), collect detected C/S T.018 beacon messages received within ± 10 Hz from the expected received test-beacon frequency¹⁷.

Count all messages (NM).

Count all anomalies (NA) which are defined as any beacon 23 Hex ID that does not match exactly the 23 Hex ID of the beacons known to transmit within the test beacon frequency 10 Hz (e.g., test beacons, reference beacons, etc.).

Determine the probability (PA) to detect an anomaly:

$$PA = NA / NM$$

Check that PA is less than 10^{-4} .

- END OF ANNEX C -

¹⁷ The expected received test beacon frequency depends on the beacon-to-satellite geometry, and thus is a function of the satellite channel; the expected received frequency of the test beacons or beacon simulator shall be then determined for each satellite channel, to allow the collection of received messages within ± 10 Hz of the expected received test beacon frequency.

ANNEX D**BEACON SIMULATOR TEST SCRIPT****D.1 C/S T.001 Message Processing Testing****D.1.1 C/S T.001 Test Messages to be Transmitted**

Test Code Sequence	Simulator	Transmit Frequency (MHz)	Date/Time (UTC)	Transmitted 30 Hex Transmitted Message (15 Hex Identifier, bits 26-85)	Number of Bit Errors				Comments
					PDF-1	BCH-1	PDF-2	BCH-2	
Bit Rate Tolerance Check (BR)									
BR1	[TBD]	406.064	[TBD]	96EEF9DA0A2BA9EB5F96F400000F19 (2DDDF3B414FFBFF)	0	0	0	0	Transmit 20 bursts at the lower end of the permissible Bit Rate Range (396 bps)
	[TBD]	406.064	[TBD]	96EEF9DA0A2BA9EB5F96F400000F19	0	0	0	0	Transmit 20 bursts at the higher end of the permissible Bit Rate Range (404 bps)
Bit Verification (BV)									
BV1	USA	406.064	[TBD]	56EE1100000000037E540000000000 (ADDC22000000000)	2	0	n/a	n/a	USA, User Test coded beacon with two (2) bit errors introduced at bits 44 and 48 in PDF-1.
BV2	USA	406.064	[TBD]	D6E10E1A4324920458B9D555555555 (ADC21C348649240)	0	0	0	0	USA, Orbitography beacon with a pattern of A01" in the long message. No bit errors
		406.064	[TBD]	D6E10E1A4324920458B9D555555555	0	0	0	0	Same as above
BV3	USA	406.064	[TBD]	D6EEAAAAAAA2EA1A24E14CD2F4 (ADDD5555555554)	0	0	0	1	USA, User Test coded beacon with encoded position (39, -76.86667) in PDF-2. One bit error at bit 138.
Message Validation (MV)									
MV1	USA	406.064	[TBD]	D6EE110000000265F1424DB4CEFBF (ADDC2200000004)	2	0	0	2	USA, User Test coded beacon with encoded position (38.8667, -76.933) in PDF-1 and PDF-2. Two (2) bit errors at bits 44 and 48 in PDF-1. Two (2) bit errors at bits 133 and 134 in BCH-2

Test Code Sequence	Simulator	Transmit Frequency (MHz)	Date/Time (UTC)	Transmitted 30 Hex Transmitted Message (15 Hex Identifier, bits 26-85)	Number of Bit Errors				Comments
					PDF-1	BCH-1	PDF-2	BCH-2	
		406.064		D6EE001110000265F1424DB4CE3BF	3	0	0	0	Three (3) bit errors at bits 52, 56 and 60 in PDF-1.
MV2	USA	406.064	[TBD]	96EE0000002729A5E22BB61B842E0A (2DDC000000FFBF0FF)	0	0	0	0	USA, Standard Location Protocol Test coded beacon with encoded position (38.884, -76.931) in PDF-1 and PDF-2.
		406.064		96EE0000002729A5E22BB61B842E0A	0	0	0	0	Same as above
		406.064		96EE0000002729A5E22BB61B842E0A	0	0	0	0	Same as above
		406.064	[TBD]	96EE00000029299B91383601261D93	0	0	0	0	Position updated to (40.996, -76.851).
		406.064		96EE00000029299B91383601261D9F	0	0	0	2	Two (2) bit errors at bits 141 and 142 in BCH-2.
MV5	France	406.064	[TBD]	8E3E0000002B80372E8B968E01107B (1C7C000000FFBF0FF)	0	0	0	0	France, Standard Location Test Encoded position (43.559, 1.482) in PDF-1 and PDF-2. Fixed Bit 107 in error Bits 107-110=0101 instead of 1101
MV6	France	406.064	[TBD]	8E3F00000AE2017508A9BE0F380330 (1C7E00003F81FE0)	0	0	0	0	France, National Location Test Protocol Encoded position (43.559, 1.482) in PDF-1 and PDF-2 Bit 109 in error. Bit 107-109= 111 instead of 110
Invalid Message Processing (IMP)									
IMP1	France	406.064	[TBD]	8E3E0780002B80372E8BB68E011E5C (PDF1: 1C7C0F000057006)	4	0	0	0	Transmission power 40 dBm France, Test User Four (4) bit errors at bits 46, 47,48 and 49 in PDF-1.
Location Protocol Processing (LP)									
LP1	France	406.064	[TBD]	8E3E0000007FDFFC77A37600003DD (1C7C000000FFBF0FF)	0	0	0	0	France, Standard Location Protocol Test coded beacon with default encoded position in PDF-1 and 0s in PDF-2.
		406.064		8E3E0000007FDFFC77A37600003DD	0	0	0	0	Same as above
		406.064		8E3E0000007FDFFC77A37600003DD	0	0	0	0	Same as above
		406.064		8E3E0000002B80372E8BB68E011E5C	0	0	0	0	Encoded position (43.559, 1.482) in PDF-1 and PDF-2
		406.064		8E3E0000002B80372E8BB68E011E5C	0	0	0	0	Same as above
		406.064		8E3E0000002B80372E8BB68E011E5C	0	0	0	0	Same as above

Test Code Sequence	Simulator	Transmit Frequency (MHz)	Date/Time (UTC)	Transmitted 30 Hex Transmitted Message (15 Hex Identifier, bits 26-85)	Number of Bit Errors				Comments
					PDF-1	BCH-1	PDF-2	BCH-2	
LP2	France	406.064	[TBD]	8E3F00000AA20175813BB60F380F6B (1C7E00003F81FE0)	0	0	0	0	Encoded position (42.559, 1.482) in PDF-1 and PDF-2
		406.064		8E3F00000AA20175813BB60F380F6B	0	0	0	0	Same as above
		406.064		8E3F00000AA20175813BB60F380F6B	0	0	0	0	Same as above
		406.064		8E3F00000AE2017508A9B60F380F6B	0	0	0	0	France, National Location Protocol Test coded beacon with encoded position (43.559, 1.482) in PDF-1 and PDF-2
		406.064		8E3F00000AE2017508A9B60F380F6B	0	0	0	0	Same as above
		406.064		8E3F00000AE2017508A9B60F380F6B	0	0	0	0	Same as above
LP3	USA	406.064	[TBD]	D6EE1F1E1E1E1E06A383EFE0FF0146 (ADDC3C3C3C3C3C0)	1	0	0	0	USA, User Test coded beacon with user default information in PDF-2. One (1) bit error at bit 48 in PDF-1
		406.064		D6EE1F1E1E1E1E06A383E4E14CD2BE	1	0	0	2	Updated user information in PDF-2. One (1) bit error in bit 48 in PDF-1 and two (2) bit errors at bits 141 and 143 in BCH-2.
		406.064		D6EE1F1E1E1E1E06A383E4E14CD2BE	1	0	0	2	One (1) bit error in bit 48 in PDF-1 and two (2) bit errors at bits 141 and 143 in BCH-2.
		406.064		D6EE1F1E1E1E1E06A383E4E14CD2B4	1	0	0	0	One (1) bit error in bit 48 in PDF-1.
LP4	USA	406.064	[TBD]	96EF000049C14CD260D5F608380389 (2DDE0000BF81FE0)	0	0	0	0	USA, National Location Protocol Test Coded beacon with encoded position (38.996, -76.851).
		406.064		96EF000049C14CD260D5F608380389	0	0	0	0	Same as above.
		406.064		96EF000049814CD2E947F608380389	0	0	0	0	Encoded position (37.996, -76.851) updated.
		406.064		96EF000049814CD2E947F60838038F	0	0	0	2	Two (2) bit errors in bits 142 and 143.
		406.064		96EF000049814CD2E947F6083803E9	0	0	0	2	Two (2) bit errors in bits 138 and 139.
Return Link (RL)									
RL1	France	406.064	[TBD]	8E3DC990004AE01ABB608866E0E91B (1C7B932000BFDFFF)	0	0	0	0	RLS Location protocol encoded position (43.558, 1.484) in PDF-1 and PDF-2. The message shall be transmitted 12 times with a repetition period of 50 seconds.
		406.064	[TBD]	8E3DC990004AE01ABB608A66E0E5DF (1C7B932000BFDFFF)	0	0	0	0	RLS Acknowledgment Message. The message shall be transmitted 12 times with a repetition period of 50 seconds.

C/S T.001 ELT(DT) Functional Validation Script

This script aims at validating specific management of ELT(DT) alerts at MEOLUT level.

The script is composed of one beacon transmitting the following sequence:

- 24 nominal bursts with 5 second repetition rate,
- 18 nominal bursts with 10 second repetition rate,
- 6 nominal bursts with 28.5 second repetition rate,
- 10 cancellation bursts with 10 second repetition rate,
- no transmission during 2 minutes,
- 24 nominal bursts with 5 second repetition rate,
- 18 nominal bursts with 10 second repetition rate,
- 6 nominal bursts with 28.5 second repetition rate.

The transmissions shall not use an operational channel of the 406 MHz bandwidth and shall be transmitted with a nominal power of 37 dBm. Beacon message should be encoded using normal mode and ELT(DT) Location Test protocol in bits 43-66.

The possible combinations of 15 Hex IDs are described in the table below, considering the possible combinations of bits 41-66, and the French country code and location bits 67-85 defaulted to the values specified in section A3.2 of document C/S T.001. Note that the location bits in PDF-1 and PDF-2 in the actual transmitted messages will change from burst to burst to simulate motion.

		Bits 43-66	
		All “0”	All “1”
Bits 41-42	00	1C520 00000 3FDFF	1C527 FFFFF BFDFFF
	01	1C528 00000 3FDFF	1C52F FFFFF BFDFFF
	10	1C530 00000 3FDFF	1C537 FFFFF BFDFFF

Additional beacon message definition:

- since the encoded location is encoded over PDF1 and PDF2 fields, both fields shall be constructed to provide a location that changes from burst to burst, consistent with horizontal motion at a speed of 1,200 km/h,
- the last three nominal bursts of the first activation sequence shall contain the same encoded location,
- the last three nominal bursts of the second activation sequence shall contain the default encoded location,
- the “means of activation” bits in PDF-2 should be set to ‘01’,
- the “encoded altitude” bits should be set to a constant value of ‘0010’,

- the “encoded location freshness” bits should be set to ‘11’.

The possible combinations of 15 Hex IDs of transmitted messages (using hexadecimal representation) of the simulated beacon for cancellation transmission is coded as follow, considering the possible combinations of bits 41-66, the French country code and the fixed bits for cancellation messages:

		Bits 43-66	
		All “0”	All “1”
Bits 41-42	00	1C520 00000 7EBFA	1C527 FFFFF FEBFA
	01	1C528 00000 7EBFA	1C52F FFFFF FEBFA
	10	1C530 00000 7EBFA	1C537 FFFFF FEBFA

Note: the fixed bits of PDF-2 for cancellation message shall be set according to the beacon cancellation message definition in document C/S T.001.

D.1.2 C/S T.001 Expected Processing

Test Code Sequence	Message to be Transmitted by MEOLUT	Encoded Location	Comments
BR1	96EEF9DA0A2BA9EB5F96F400000F19	n/a	MEOLUT sends a valid message to the MCC.
BV1	56EE0000000000037E540000000000	n/a	MEOLUT should correct two bit errors and transmit corrected message to the MCC.
BV2	D6E10E1A4324920458B9D555555555	n/a	MEOLUT should transmit orbitography beacon message without error correcting the long message.
BV3	D6EEAAAAAAAAAA2EA1A24E14CD2B4	39, -76.86667	MEOLUT should correct error at bit 138 and transmit alert to the MCC.
MV1	D6EE0000000000265F1424FFFFFFFFFF D6EE0000000000265F1424DB4CE3BF	n/a 38.8667, -76.933	For the first burst, MEOLUT corrects the beacon message (message is valid but not complete) and transmits the corrected message to the MCC with bits 113 to 144 all set to "1". For the second burst, MEOLUT corrects the beacon message (message is confirmed and complete) and transmits the corrected message to the MCC.
MV2	96EE0000002729A5E22BB61B842E0A 96EE00000029299B91383601261D93 96EE00000029299B913836FFFFFFFFFF	38.884, -76.931 40.996, 76.851 n/a	For the first burst, the MEOLUT sends a complete, confirmed message to the MCC and calculates DOA position. For the fourth burst the MEOLUT sends a complete, confirmed message to the MCC and calculates DOA position. For the fifth burst the MEOLUT sends a confirmed but incomplete message to the MCC and calculates DOA position.
MV5	8E3E0000002B80372E8BBFFFFFFFFF	n/a	MEOLUT sends a confirmed invalid message with an independent location to the MCC without bit correction in PDF1+BCH1 and with bits 107 to 144 set to "1".
MV6	8E3F00000AE2017508A9BFFFFFFFFF	n/a	MEOLUT sends a confirmed invalid message with an independent location to the MCC without bit correction in PDF1+BCH1 and with bits 107 to 144 set to "1".
IMP1	Case 1: no message transmitted Case 2: 8E3E0780002B80372E8BBFFFFFFFFF	n/a	Two outcomes are possible for this test: Case 1: If 2 or less matching invalid messages, MEOLUT shall filter out messages. Case 2: If 3 or more matching invalid messages, MEOLUT sends a confirmed invalid message with an independent location to the MCC without bit correction in PDF1+BCH1 and with bits 107 to 144 set to "1".
LP1	8E3E0000007FDFFC77A376000003DD 8E3E0000002B80372E8BB68E011E5C	Default location 43.559, 1.482	MEOLUT sends two confirmed messages with the update of the encoded position confirmed message for Standard Location Protocol beacon to MCC and calculates DOA position associated with both messages.

Test Code Sequence	Message to be Transmitted by MEOLUT	Encoded Location	Comments
LP2	8E3F0000AA20175813BB60F380F6B 8E3F0000AE2017508A9B60F380F6B	42.559, 1.482 43.559, 1.482	MEOLUT sends updated, confirmed message for National Location Protocol beacon to MCC and calculates DOA position.
LP3	1. D6EE1E1E1E1E1E06A383EFE0FF0146 2. and/or 3. D6EE1E1E1E1E06A383E4FFFFFF 4.D6EE1E1E1E1E06A383E4E14CD2B4	n/a	MEOLUT sends: From transmitted burst #1: a confirmed or unconfirmed complete message (depending on the number matching received messages). From transmitted bursts #2 or #3: a confirmed incomplete message with PDF-2 defaulted with bits 113 to 144 set to “1”. Which burst is sent depends on which message is confirmed. If no confirmation is achieved, then no message is sent. From transmitted bursts #4: a confirmed or unconfirmed complete message (depending on the number matching received messages) with updated user information in new PDF-2.
LP4	96EF000049C14CD260D5F608380389 96EF000049814CD2E947F608380389 96EF000049814CD2E947F6FFFFFF	38.996, -76.851 37.996, -76.851 n/a	MEOLUT sends complete, confirmed message with an independent location to the MCC and calculates DOA position. For the third burst MEOLUT sends complete, confirmed message to the MCC and calculates DOA position. For the fourth and fifth burst, the MEOLUT sends a confirmed but incomplete message to MCC depending on which message is confirmed and calculates DOA position.
RL1	8E3DC990004AE01ABB608866E0E91B 8E3DC990004AE01ABB608A66E0E5DF	43.558, 1.484	Forward Link message: MEOLUT sends at least one complete message to the MCC. Acknowledgment message: MEOLUT sends at least one complete acknowledgment message to the MCC.

C/S T.001 ELT(DT) Functional Validation Script

For the FGB ELT(DT) functional validation test, it should be verified that each received burst (as collected per Table E.3) results in an alert message sent to the associated MCC (as collected per Table E.5).

D.2 C/S T.018 Message Processing Testing

D.2.1 C/S T.018 Test Messages to be Transmitted

Test Code Sequence	Simulator	Transmit Frequency (MHz)	Date/Time (UTC)	Transmitted 63 Hex Transmitted Message (23 Hex Identifier)	Number of Bit Errors		Comments
					PDF	BCH	
Message Recovery (MR)							
MR1	[TBD]	406.05	[TBD]	3FFF1B0038C95C7BE00BD8CE0003A000400BFFF000004C00587A6ECF9F8EA1 (9C77FFF1B00F0001D000200)	0	0	Transmit bursts with normal mode PRN
		406.05	[TBD]	BFFF1B0038C95C7BE00BD8CE0003A000402BFFF000004C00583EE3B7F96E32 (9C77FFF1B00F0001D000201)	0	0	Transmit bursts with self-test mode PRN
MR2	[TBD]	406.047	[TBD]	3FFF1B0038C95C7BE00BD8CE0003A000404BFFF000004C0058F3743F524F87 (9C77FFF1B00F0001D000202)	0	0	Transmit 20 bursts at the lower limit of the processing bandwidth
		406.053	[TBD]	3FFF1B0038C95C7BE00BD8CE0003A000406BFFF000004C0058B7F94734AF14 (9C77FFF1B00F0001D000203)	0	0	Transmit 20 bursts at the upper limit of the processing bandwidth
Bit Verification (BV)							
BV1	[TBD]	406.05	[TBD]	3FFF1B0038C95C7BE00BD8CE0 <u>F0</u> 3A000440BFFF000004C00580CD87F19B6B1 (9C77FFF1B00F0781D000220)	4	2	Transmit bursts with 6 bit errors on PDF+BCH
Invalid Message Processing (IMP)							
IMP1	[TBD]	406.05	[TBD]	3FFF1B0038C95C7BE00BD8CE0 <u>F1</u> 3A000440BFFF000004C00580CD87F19B6B1 (9C77FFF1B00F0789D000220)	5	2	Transmit bursts with 7 bit errors on PDF+BCH
Message Association (MA)							
MA1	[TBD]	406.05	[TBD]	3FFF1B0038D95C7BE00BD8CE0003A0004607FFF000004C0059040FD1F52693 (9C77FFF1B00F0001D000230)	1	0	1 burst with rotating fields #0
		406.05	[TBD]	<u>0</u> FFF1B0038D95C7BE00BD8CE0003A0004607FFF1546004E340088F57A696090 (9C77FFF1B00F0001D000230)	2	0	1 burst with rotating fields #1
		406.05	[TBD]	3FFF1B0038D95 <u>2</u> 7BE00BD8CE0003A0004607FFF22020000000ACEC7AB6DDAA (9C77FFF1B00F0001D000230)	3	0	1 burst with rotating fields #2
		406.05	[TBD]	3FFF1B0038D95 <u>3</u> 7BE00BD8CE0003A0004607FFF300000000008C4D946E59D2 (9C77FFF1B00F0001D000230)	4	0	1 burst with rotating fields #3

Test Code Sequence	Simulator	Transmit Frequency (MHz)	Date/Time (UTC)	Transmitted 63 Hex Transmitted Message (23 Hex Identifier)	Number of Bit Errors		Comments	
					PDF	BCH		
		406.05	[TBD]	3FFF1B0038D953FBE00BD8CE0003A0004604000FFFFFFFFFF636F21C9D0F (9C77FFF1B00F0001D000230)	5	0	1 burst with rotating fields #15	
				Return Link (RL)				
RL1	France	406.05	[TBD]	3FFF1B0038D95C7BE00BD8CE0003A0004807FFF000004C0058477A9AD3ECE4 (9C77FFF1B00F0001D000240) 3FFF1B0038D95C7BE00BD8CE0003A0004807FFF220200000000EF99319017DD (9C77FFF1B00F0001D000240)	0	0	Each message shall be transmitted 6 times alternating (at 30 second intervals) between the two beacon messages resulting in 12 bursts in total.	
		406.05	[TBD]	3FFF1B0038D95C7BE00BD8CE0003A0004807FFF000004C0058477A9AD3ECE4 (9C77FFF1B00F0001D000240) 3FFF1B0038D95C7BE00BD8CE0003A0004807FFF220300000000D92177A63257 (9C77FFF1B00F0001D000240)	0	0	RLS Acknowledgment Message. Each message shall be transmitted 6 times alternating (at 30 second intervals) between the two beacon messages resulting in 12 bursts in total.	

C/S T.018 ELT(DT) Functional Validation Script

This script aims at validating specific management of ELT(DT) alerts at MEOLUT level.

The script is composed of one beacon transmitting the following sequence:

- 24 nominal bursts with 5 second repetition rate,
- 18 nominal bursts with 10 second repetition rate,
- 6 nominal bursts with 28.5 second repetition rate,
- 10 cancellation bursts with 10 second repetition rate,
- no transmission during 2 minutes,
- 24 nominal bursts with 5 second repetition rate,
- 18 nominal bursts with 10 second repetition rate,
- 6 nominal bursts with 28.5 second repetition rate.

The transmissions shall be done at 406.05 MHz.

The Hex ID of the simulated beacon for transmissions is coded as follow:

9C57 FFF0 D00F 000D B000 001

- 9C57: fixed value for all beacon events¹⁸ (this is an example using a French country code 226)

Additional beacon message definition:

- the encoded latitude/longitude in the main field of the message shall be constructed in the beacon message, consistent with horizontal beacon motion at 1,200 km/h,
- the last three nominal bursts of the first activation sequence shall contain the same encoded location,
- the first three nominal bursts of the cancellation sequence shall contain the same encoded location,
- the last three bursts of the cancellation sequence shall contain the default encoded location,
- the last three bursts of the second activation sequence shall contain the default encoded location,
- the rotating field shall be #1 with:
 - ‘Time of last encoded location’ should be all ones,
 - altitude of encoded location should be 0 m,
 - triggering event should be ‘1000’,
 - GNSS status should be 2D,
 - remaining battery capacity should be ‘11’.

¹⁸ In this document, the term “beacon event” is used to describe a beacon activation with its individual Hex ID and/or other characteristics (e.g., frequency, bitrate, etc.), being active for a period of time (i.e., from the activation until the completion of transmission of the last burst).

The script of this test shall implement beacon messages using the normal spreading sequence with the Test Protocol bit 43 set to 1. For cancellation transmissions, the rotating field shall be #15 and the “method of deactivation” field shall be set to ‘01’.

D.2.2 C/S T.018 Expected Processing

Test Code Sequence	Message to be Transmitted by MEOLUT	Encoded Location	Comments
MR1	3FFF1B0038C95C7BE00BD8CE0003A000400BFFF0000004C00587A6ECF9F8EA1	43.56049, 1.48083	MEOLUT sends message with normal mode PRN to the MCC and filters out self-test mode PRN.
MR2	3FFF1B0038C95C7BE00BD8CE0003A000404BFFF0000004C0058F3743F524F87 and 3FFF1B0038C95C7BE00BD8CE0003A000406BFFF0000004C0058B7F94734AF14	43.56049, 1.48083	MEOLUT records message and sends it to the MCC.
BV1	3FFF1B0038C95C7BE00BD8CE0003A000440BFFF0000004C00580CD87F19B6B2	43.56049, 1.48083	MEOLUT should correct 6 bit errors and transmit corrected message.
IMP1	Case 1: no message transmitted Case 2: 3FFF1B0038C95C7BE00BD8CE0F13A000440BFFF0000004C00580CD87F19B6B1	n/a	Two outcomes are possible for this test: Case 1: If 2 or less matching invalid messages, MEOLUT shall filter out messages. Case 2: If 3 or more matching invalid messages, MEOLUT calculates and sends a location solution with a confirmed invalid message to the MCC without bit correction in PDF+BCH. The 23 Hex ID of the alert message is "9C77FFF1B00F0789D000220".
MA1	3FFF1B0038D95C7BE00BD8CE0003A0004607FFF0000004C0058040FD1F52693 3FFF1B0038D95C7BE00BD8CE0003A0004607FFF1546004E340088F57A696090 3FFF1B0038D95C7BE00BD8CE0003A0004607FFF22020000000ACEC7AB6DDAA 3FFF1B0038D95C7BE00BD8CE0003A0004607FFF3000000000008C4D946E59D2 3FFF1B0038D95C7BE00BD8CE0003A0004604000FFFFFFFFFFF636F21C9D0F	43.56049, 1.48083	MEOLUT corrects beacon messages and transmits corrected message to MCC even if the EHE does not decrease. The 23 Hex ID of all alert messages is "9C77FFF1B00F0001D000230".
RL1	3FFF1B0038D95C7BE00BD8CE0003A0004807FFF0000004C0058477A9AD3ECE4 3FFF1B0038D95C7BE00BD8CE0003A0004807FFF22020000000EF99319017DD 3FFF1B0038D95C7BE00BD8CE0003A0004807FFF300000000D92177A63257	43.56049, 1.48083 43.56049, 1.48083	Forward Link message: MEOLUT sends at least one valid message for each rotating field (#0 and #2) to the MCC. Acknowledgment message: MEOLUT sends at least one valid acknowledgment message for each rotating field (#0 and #2) to the MCC. The 23 hex ID of all alert messages is "9C77FFF1B00F0001D000240".

C/S T.018 ELT(DT) Functional Validation Script

For the SGB ELT(DT) functional validation test, it should be verified that each received burst (as collected per Table E.3) results in an alert message sent to the associated MCC (as collected per Table E.5).

D.3 C/S T.001 Performance Testing

D.3.1 General Performance Script for C/S T.001 Beacons

This annex provides a description of the beacon signals that have to be transmitted in order to generate the statistics for performance requirements described in Annex C. The script is comprised of 25 beacon IDs simultaneously active and each transmitting 12 bursts. The transmissions shall only use an unallocated channel of the 406 MHz frequency bandwidth. No beacon bursts shall overlap in time, and each beacon ID shall transmit at a fixed repetition period of 50 seconds without randomization.

The 15 Hex IDs of beacon events are coded as follows: 9C9D0000YYD0037.

- 9C9D0: fixed value for all beacon events (this is an example using a French country code),
- YY: beacon event serial 01 to 25,
- D00: fixed value for all beacon events,
- 37: signifies nominal transmission power of 37 dBm,
- the transmitted frequency of each beacon event shall be $f_t = f_0 - 5450 + (YY - 1) * (2*5450)/(25-1)$ Hz (rounded to Hz), with f_0 being the center frequency of the beacon frequency channel used.

The first beacon (YY=01) shall transmit its first burst at time T_0 . The second beacon (YY=02) shall transmit its first burst at T_0+2 seconds, the third beacon (YY=03) shall transmit its first burst at T_0+4 seconds, and so on, with the 25th beacon (YY=25) transmitting its first burst at T_0+48 seconds. The first beacon (YY=01) shall transmit its second burst at T_0+50 seconds, and the script shall continue as such until the 25th beacon (YY=25) transmits its 12th burst at T_0+598 seconds. Hence, one execution of this script shall produce a total of 300 bursts.

The appropriate country code is to be coded within the 15 Hex ID to indicate which beacon simulator is transmitting the burst.

The script of this test shall implement beacon messages using the inverted frame synchroniser pattern.

D.3.2 Performance Evaluation Script for C/S T.001 ELT(DT)s

The script is comprised of 25 beacon IDs, each transmitting 63 bursts, with a fixed repetition rate of 28.5 seconds and beacon event separated by 1 s. The transmissions shall not use an operational channel of the 406 MHz bandwidth, but the transmission frequency shall be spread so that it covers a range of 10.9 kHz with a resolution of 412.5 Hz.

The script shall be repeated for a duration of at least 4 hours to allow various geometric configurations and tracking plan.

The 15 Hex IDs of beacon events are coded as follows: 1C538 0ZZYY 3FDFF,

- 1C538: fixed value for all beacon events (this is an example using a French country code 226),

- YY: beacon event serial 01 to 25,
- D: fixed value for all beacon events,
- ZZ: frequency shift factor between 0 and 27 (the transmitted frequency shall be $f_t = f_0 + ZZ \times 412.5$ Hz, with $f_0 = 406.058600$ MHz the nominal frequency). A correspondence between ZZ and YY is given in the table below,
- FF: 37, signifies nominal transmission power of 37 dBm.

The appropriate country code is to be coded within the 15 Hex ID to indicate which beacon simulator is transmitting the burst.

The script of this test shall implement beacon messages using the inverted frame synchronization pattern (self-test mode).

The following table gives additional guidance about the test script to be used:

15 Hex ID of Beacon	Time of Transmission T0 + XX s	Transmission Power (dBm)	Frequency ZZ
1C538 00001 3FDFF	0	37	0
1C538 01402 3FDFF	1	37	14
1C538 00703 3FDFF	2	37	7
1C538 02204 3FDFF	3	37	22
1C538 00105 3FDFF	4	37	1
1C538 01506 3FDFF	5	37	15
1C538 00807 3FDFF	6	37	8
1C538 02308 3FDFF	7	37	23
1C538 00209 3FDFF	8	37	2
1C538 01610 3FDFF	9	37	16
1C538 00911 3FDFF	10	37	9
1C538 02412 3FDFF	11	37	24
1C538 00313 3FDFF	12	37	3
1C538 01714 3FDFF	13	37	17
1C538 01015 3FDFF	14	37	10
1C538 02516 3FDFF	15	37	25
1C538 00417 3FDFF	16	37	4
1C538 01818 3FDFF	17	37	18
1C538 01119 3FDFF	18	37	11
1C538 02620 3FDFF	19	37	26
1C538 00521 3FDFF	20	37	5
1C538 01922 3FDFF	21	37	19
1C538 01223 3FDFF	22	37	12
1C538 02724 3FDFF	23	37	27
1C538 00625 3FDFF	24	37	6
1C538 00001 3FDFF	28.5	37	0
1C538 01402 3FDFF	29.5	37	14
...

D.4 C/S T.018 Performance Testing

D.4.1 General Performance Script for C/S T.018 Beacons

Performance scripts described in this section shall be transmitted in self-test mode to avoid any disruption of the operational System (except the Partially Overlapping Bursts Script, for which transmission using the normal mode is required).

D.4.1.1 Partially Overlapping Bursts Script

This is a script for four overlapping bursts to evaluate the associated detection performance.

This annex provides a description of the beacon signals that have to be transmitted in order to generate the statistics for performance requirements described in Annex C. The script is comprised of 4 beacon IDs, each transmitting 25 bursts with a repetition period of 30 seconds.

The 23 Hex IDs of beacon events are coded as follows: ADF7 FFF0 XXXF DNNF PP00 000

- ADF7: fixed value for all beacon events (this is an example using a USA country code)
- XXX: beacon event ID 1 to 4
- NN = total number of bursts (fixed value) to be transmitted for each beacon ID during each execution of the script (25),
- PP = the same transmit power to be used for each beacon ID, and using the same power level as for the other performance test scripts,

The appropriate country code is to be coded within the 23 Hex ID to indicate which beacon simulator is transmitting the burst.

The script of this test shall implement beacon messages using the Test Protocol bit set to “1”.

23 Hex ID of Beacon	Time of Transmission T0 + XX s	Frequency FF (Hz)
ADF7 FFF0 001F D25F PP00 000	0.0	406048350
ADF7 FFF0 002F D25F PP00 000	0.25	406048450
ADF7 FFF0 003F D25F PP00 000	0.50	406048600
ADF7 FFF0 004F D25F PP00 000	0.75	406048800
...		
ADF7 FFF0 001F D25F PP00 000	30.0	406048350
ADF7 FFF0 002F D25F PP00 000	30.25	406048450
ADF7 FFF0 003F D25F PP00 000	30.50	406048600
ADF7 FFF0 004F D25F PP00 000	30.75	406048800
...		
ADF7 FFF0 001F D25F PP00 000	60.0	406048350
ADF7 FFF0 002F D25F PP00 000	60.25	406048450
ADF7 FFF0 003F D25F PP00 000	60.50	406048600
ADF7 FFF0 004F D25F PP00 000	60.75	406048800
...		
ADF7 FFF0 001F D25F PP00 000	90.0	406048350
ADF7 FFF0 002F D25F PP00 000	90.25	406048450

ADF7 FFF0 003F D25F PP00 000	90.50	406048600
ADF7 FFF0 004F D25F PP00 000	90.75	406048800
...		

D.4.1.2 30-Second Script

This is a script for the first 30 seconds of beacon activation, to evaluate the detection and location performance for single burst and at 30 seconds from beacon activation.

This annex provides a description of the beacon signals that have to be transmitted in order to generate the statistics for performance requirements described in Annex C. The script is comprised of 4 beacon IDs, each transmitting 6 bursts with a repetition period of 5 seconds. The beacon IDs will increment from 1 to 100 in sets of 4 and then restart.

The 23 Hex IDs of beacon events are coded as follows: ADF7 FFF0 XXXF DNNF PP00 000

- ADF7: fixed value for all beacon events (this is an example using a USA country code),
- FFF0: TAC 65532 for beacon simulator, followed by the first 2 bits of the serial number set to 00,
- XXX: beacon event ID 1 to 4, 5 to 8, ..., 81 to 84, ..., 97 to 100, 1 to 4,,
- NN = total number of bursts (fixed value) to be transmitted for each beacon ID during each execution of the script (6),
- PP = transmitted power.

Additional beacon burst parameters (see table below):

- FF: transmitted frequency that shall be $f_t = f_0 - 1650 + (XXX - 1) * (2 * 1650) / (100 - 1)$ Hz, with $f_0 = 406.05$ MHz (rounded to Hz),
- CRA: Chip Rate Accuracy, shall be so that $CRA = 0.6 * \sin(\pi/2 * (XXX - 1))$ chips/s,
- CRV: Chip Rate Variation, shall be so that $CRV = 0.6 * \sin(\pi/2 * \text{INT}((XXX - 1) / 4))$ chips/s².

The appropriate country code is to be coded within the 23 Hex ID to indicate which beacon simulator is transmitting the burst.

The script of this test shall implement beacon messages using the Test Protocol bit set to “1”.

23 Hex ID of Beacon	Time of Transmission T0 + XX s	Transmission Power (dBm)	Frequency FF (Hz)	Chip rate accuracy CRA (chips/s)	Chip rate variation CRV (chips/s ²)
ADF7 FFF0 001F D06F PP00 000	0.0	PP	406048350	0	0
ADF7 FFF0 002F D06F PP00 000	1.1	PP	406048383	0.6	0
ADF7 FFF0 003F D06F PP00 000	2.2	PP	406048417	0	0
ADF7 FFF0 004F D06F PP00 000	3.3	PP	406048450	-0.6	0
ADF7 FFF0 001F D06F PP00 000	5.0	PP	406048350	0	0
ADF7 FFF0 002F D06F PP00 000	6.1	PP	406048383	0.6	0
ADF7 FFF0 003F D06F PP00 000	7.2	PP	406048417	0	0
ADF7 FFF0 004F D06F PP00 000	8.3	PP	406048450	-0.6	0

23 Hex ID of Beacon	Time of Transmission T0 + XX s	Transmission Power (dBm)	Frequency FF (Hz)	Chip rate accuracy CRA (chips/s)	Chip rate variation CRV (chips/s ²)
...
ADF7 FFF0 001F D06F PP00 000	25.0	PP	406048350	0	0
ADF7 FFF0 002F D06F PP00 000	26.1	PP	406048383	0.6	0
ADF7 FFF0 003F D06F PP00 000	27.2	PP	406048417	0	0
ADF7 FFF0 004F D06F PP00 000	28.3	PP	406048450	-0.6	0
ADF7 FFF0 005F D06F PP00 000	30.0	PP	406048483	0	0.6
ADF7 FFF0 006F D06F PP00 000	31.1	PP	406048517	0.6	0.6
ADF7 FFF0 007F D06F PP00 000	32.2	PP	406048550	0	0.6
ADF7 FFF0 008F D06F PP00 000	33.3	PP	406048583	-0.6	0.6
...
ADF7 FFF0 097F D06F PP00 000	745.0	PP	406051550	0	0.6
ADF7 FFF0 098F D06F PP00 000	746.1	PP	406051583	0.6	0.6
ADF7 FFF0 099F D06F PP00 000	747.2	PP	406051617	0	0.6
ADF7 FFF0 100F D06F PP00 000	748.3	PP	406051650	-0.6	0.6
ADF7 FFF0 001F D06F PP00 000	750.0	PP	406048350	0	0
ADF7 FFF0 002F D06F PP00 000	751.1	PP	406048383	0.6	0
ADF7 FFF0 003F D06F PP00 000	752.2	PP	406048417	0	0
ADF7 FFF0 004F D06F PP00 000	753.3	PP	406048450	-0.6	0
...

D.4.1.3 5-Minute Script

This is a script for the first 5 minutes of beacon activation, to evaluate the location performance for single burst and at 5 minutes.

This annex provides a description of the beacon signals that have to be transmitted in order to generate the statistics for performance requirements described in Annex C. The script is comprised of 4 beacon IDs each transmitting 6 bursts with a repetition period of 5 seconds followed by 9 bursts with a repetition period of 30 seconds. The beacon IDs will increment from 1 to 16 in sets of 4 and then restart.

The 23 Hex IDs of beacon events are coded as follows: ADF7 FFF0 XXXF DNNF PP00 000

- ADF7: fixed value for all beacon events (this is an example using a USA country code),
- FFF0: TAC 65532 for beacon simulator, followed by the first 2 bits of the serial number set to 00,
- XXX : beacon event ID, 1 to 4, 5 to 8, 9 to 12, 13 to 16, 1 to 4, ...,
- NN = total number of bursts (fixed value) to be transmitted for each beacon ID during each execution of the script (15),
- PP = transmitted power,

Additional beacon burst parameters (see table below):

- FF: transmitted frequency that shall be $f_t = f_0 - 1650 + (XXXX - 1) * (2*1650)/(16-1)$ Hz, with $f_0 = 406.05$ MHz (rounded to Hz),
- CRA: Chip Rate Accuracy, shall be so that $CRA = 0.6 * \sin(\pi/2 * (XXXX - 1))$ chips/s,

- CRV: Chip Rate Variation, shall be so that $CRV = 0.6 * \sin(\pi/2 * \text{INT}((XXXX-1)/4))$ chips/s².

The appropriate country code is to be coded within the 23 Hex ID to indicate which beacon simulator is transmitting the burst.

The script of this test shall implement beacon messages using the Test Protocol bit set to “1”.

23 Hex ID of Beacon	Time of Transmission T0 + XX s	Transmission Power (dBm)	Frequency FF (Hz)	Chip rate accuracy CRA (chips/s)	Chip rate variation CRV (chips/s ²)
ADF7 FFF0 001F D15F PP00 000	0.0	PP	406048350	0	0
ADF7 FFF0 002F D15F PP00 000	1.1	PP	406048570	0.6	0
ADF7 FFF0 003F D15F PP00 000	2.2	PP	406048790	0	0
ADF7 FFF0 004F D15F PP00 000	3.3	PP	406049010	-0.6	0
ADF7 FFF0 001F D15F PP00 000	5.0	PP	406048350	0	0
ADF7 FFF0 002F D15F PP00 000	6.1	PP	406048570	0.6	0
ADF7 FFF0 003F D15F PP00 000	7.2	PP	406048790	0	0
ADF7 FFF0 004F D15F PP00 000	8.3	PP	406049010	-0.6	0
...
ADF7 FFF0 001F D15F PP00 000	25.0	PP	406048350	0	0
ADF7 FFF0 002F D15F PP00 000	26.1	PP	406048570	0.6	0
ADF7 FFF0 003F D15F PP00 000	27.2	PP	406048790	0	0
ADF7 FFF0 004F D15F PP00 000	28.3	PP	406049010	-0.6	0
ADF7 FFF0 001F D15F PP00 000	55.0	PP	406048350	0	0
ADF7 FFF0 002F D15F PP00 000	56.1	PP	406048570	0.6	0
ADF7 FFF0 003F D15F PP00 000	57.2	PP	406048790	0	0
ADF7 FFF0 004F D15F PP00 000	58.3	PP	406049010	-0.6	0
ADF7 FFF0 001F D15F PP00 000	85.0	PP	406048350	0	0
ADF7 FFF0 002F D15F PP00 000	86.1	PP	406048570	0.6	0
ADF7 FFF0 003F D15F PP00 000	87.2	PP	406048790	0	0
ADF7 FFF0 004F D15F PP00 000	88.3	PP	406049010	-0.6	0
...
ADF7 FFF0 001F D15F PP00 000	295.0	PP	406048350	0	0
ADF7 FFF0 002F D15F PP00 000	296.1	PP	406048570	0.6	0
ADF7 FFF0 003F D15F PP00 000	297.2	PP	406048790	0	0
ADF7 FFF0 004F D15F PP00 000	298.3	PP	406049010	-0.6	0
ADF7 FFF0 005F D15F PP00 000	300.0	PP	406049230	0	0.6
ADF7 FFF0 006F D15F PP00 000	301.1	PP	406049450	0.6	0.6
ADF7 FFF0 007F D15F PP00 000	302.2	PP	406049670	0	0.6
ADF7 FFF0 008F D15F PP00 000	303.3	PP	406049890	-0.6	0.6
...
ADF7 FFF0 013F D15F PP00 000	1195.0	PP	406050990	0	-0.6
ADF7 FFF0 014F D15F PP00 000	1196.1	PP	406051210	0.6	-0.6
ADF7 FFF0 015F D15F PP00 000	1197.2	PP	406051430	0	-0.6
ADF7 FFF0 016F D15F PP00 000	1198.3	PP	406051650	-0.6	-0.6
ADF7 FFF0 001F D15F PP00 000	1200.0	PP	406048350	0	0
ADF7 FFF0 002F D15F PP00 000	1201.1	PP	406048570	0.6	0
ADF7 FFF0 003F D15F PP00 000	1202.2	PP	406048790	0	0
ADF7 FFF0 004F D15F PP00 000	1203.3	PP	406049010	-0.6	0
...

D.4.1.4 30-Minute Script

This is a script for the first 30 minutes of beacon activation, to evaluate the location performance for single burst and at 30 minutes.

This annex provides a description of the beacon signals that have to be transmitted in order to generate the statistics for performance requirements described in Annex C. The script is comprised of 4 beacon IDs, each transmitting 6 bursts with a repetition period of 5 seconds followed by 59 bursts with a repetition period of 30 seconds. The beacon IDs will increment from 1 to 8 in sets of 4 and then restart to insure proper processing.

The 23 Hex IDs of beacon events are coded as follows: ADF7 FFF0 XXXF DNNF PP00 000

- ADF7: fixed value for all beacon events (this is an example using a USA country code),
- FFF0: TAC 65532 for beacon simulator, followed by the first 2 bits of the serial number set to 00,
- XXX: beacon event serial 1 to 4, 5 to 8, 1 to 4, ...,
- NN = total number of bursts (fixed value) to be transmitted for each beacon ID during each execution of the script (65),
- PP = transmitted power,

Additional beacon burst parameters (see table below):

- FF: transmitted frequency that shall be $f_t = f_0 - 1650 + (XXXX - 1) * (2*1650)/(8-1)$ Hz, with $f_0 = 406.05$ MHz (rounded to Hz),
- CRA: Chip Rate Accuracy, shall be so that $CRA = 0.6 * \sin(\pi/2 * (XXXX-1))$ chips/s,
- CRV: Chip Rate Variation, shall be so that $CRV = 0.6 * \sin(\pi/2 * \text{INT}((XXXX-1)/4))$ chips/s².

The appropriate country code is to be coded within the 23 Hex ID to indicate which beacon simulator is transmitting the burst.

The script of this test shall implement beacon messages using the Test Protocol bit set to “1”.

23 Hex ID of Beacon	Time of Transmission T0 + XX s	Transmission Power (dBm)	Frequency FF (Hz)	Chip rate accuracy CRA (chips/s)	Chip rate variation CRV (chips/s ²)
ADF7 FFF0 001F D65F PP00 000	0.0	PP	406048350	0	0
ADF7 FFF0 002F D65F PP00 000	1.1	PP	406048821	0.6	0
ADF7 FFF0 003F D65F PP00 000	2.2	PP	406049293	0	0
ADF7 FFF0 004F D65F PP00 000	3.3	PP	406049764	-0.6	0
ADF7 FFF0 001F D65F PP00 000	5.0	PP	406048350	0	0
ADF7 FFF0 002F D65F PP00 000	6.1	PP	406048821	0.6	0
ADF7 FFF0 003F D65F PP00 000	7.2	PP	406049293	0	0
ADF7 FFF0 004F D65F PP00 000	8.3	PP	406049764	-0.6	0
...
ADF7 FFF0 001F D65F PP00 000	25.0	PP	406048350	0	0
ADF7 FFF0 002F D65F PP00 000	26.1	PP	406048821	0.6	0
ADF7 FFF0 003F D65F PP00 000	27.2	PP	406049293	0	0

23 Hex ID of Beacon	Time of Transmission T0 + XX s	Transmission Power (dBm)	Frequency FF (Hz)	Chip rate accuracy CRA (chips/s)	Chip rate variation CRV (chips/s ²)
ADF7 FFF0 004F D65F PP00 000	28.3	PP	406049764	-0.6	0
ADF7 FFF0 001F D65F PP00 000	55.0	PP	406048350	0	0
ADF7 FFF0 002F D65F PP00 000	56.1	PP	406048821	0.6	0
ADF7 FFF0 003F D65F PP00 000	57.2	PP	406049293	0	0
ADF7 FFF0 004F D65F PP00 000	58.3	PP	406049764	-0.6	0
ADF7 FFF0 001F D65F PP00 000	85.0	PP	406048350	0	0
ADF7 FFF0 002F D65F PP00 000	86.1	PP	406048821	0.6	0
ADF7 FFF0 003F D65F PP00 000	87.2	PP	406049293	0	0
ADF7 FFF0 004F D65F PP00 000	88.3	PP	406049764	-0.6	0
...
ADF7 FFF0 001F D65F PP00 000	1795.0	PP	406048350	0	0
ADF7 FFF0 002F D65F PP00 000	1796.1	PP	406048821	0.6	0
ADF7 FFF0 003F D65F PP00 000	1797.2	PP	406049293	0	0
ADF7 FFF0 004F D65F PP00 000	1798.3	PP	406049764	-0.6	0
ADF7 FFF0 005F D65F PP00 000	1800.0	PP	406050236	0	0.6
ADF7 FFF0 006F D65F PP00 000	1801.1	PP	406050707	0.6	0.6
ADF7 FFF0 007F D65F PP00 000	1802.2	PP	406051179	0	0.6
ADF7 FFF0 008F D65F PP00 000	1803.3	PP	406051650	-0.6	0.6
...
ADF7 FFF0 005F D65F PP00 000	3595.0	PP	406050236	0	0.6
ADF7 FFF0 006F D65F PP00 000	3596.1	PP	406050707	0.6	0.6
ADF7 FFF0 007F D65F PP00 000	3597.2	PP	406051179	0	0.6
ADF7 FFF0 008F D65F PP00 000	3598.3	PP	406051650	-0.6	0.6
ADF7 FFF0 001F D65F PP00 000	3600.0	PP	406048350	0	0
ADF7 FFF0 002F D65F PP00 000	3601.1	PP	406048821	0.6	0
ADF7 FFF0 003F D65F PP00 000	3602.2	PP	406049293	0	0
ADF7 FFF0 004F D65F PP00 000	3603.3	PP	406049764	-0.6	0
...

D.4.1.5 After 30-Minute Script

This is a script for transmission as after the 30 first minutes of beacon activation, to evaluate the location performance for single burst and after 30 minutes.

This annex provides a description of the beacon signals that have to be transmitted in order to generate the statistics for performance requirements described in Annex C. The script is comprised of 15 beacon IDs, each transmitting 15 bursts with a repetition period of 120 seconds. The beacon IDs will increment from 1 to 30 in sets of 15 and then restart.

The 23 Hex IDs of beacon events are coded as follows: ADF7 FFF0 XXXF DNNF PP00 000

- ADF7: fixed value for all beacon events (this is an example using a USA country code),
- FFF0: TAC 65532 for beacon simulator, followed by the first 2 bits of the serial number set to 00,
- XXX: beacon event serial 1 to 15, 16 to 30, 1 to 15, ...,

- NN = total number of bursts (fixed value) to be transmitted for each beacon ID during each execution of the script (15),
- PP = transmitted power,

Additional beacon burst parameters (see table below):

- FF: transmitted frequency that shall be $f_t = f_0 - 1650 + (XXXX - 1) * (2*1650)/(30-1)$ Hz, with $f_0 = 406.05$ MHz (rounded to Hz),
- CRA: Chip Rate Accuracy, shall be so that $CRA = 0.6 * \sin(\pi/2 * (XXXX-1))$ chips/s,
- CRV: Chip Rate Variation, shall be so that $CRV = 0.6 * \sin(\pi/2 * \text{INT}((XXXX-1)/4))$ chips/s².

The appropriate country code is to be coded within the 23 Hex ID to indicate which beacon simulator is transmitting the burst.

The script of this test shall implement beacon messages using the Test Protocol bit set to “1”.

23 Hex ID of Beacon	Time of Transmission T0 + XX s	Transmission Power (dBm)	Frequency FF (Hz)	Chip rate accuracy CRA (chips/s)	Chip rate variation CRV (chips/s ²)
ADF7 FFF0 001F D15F PP00 000	0	PP	406048350	0	0
ADF7 FFF0 002F D15F PP00 000	2	PP	406048464	0.6	0
ADF7 FFF0 003F D15F PP00 000	4	PP	406048578	0	0
...
ADF7 FFF0 015F D15F PP00 000	28	PP	406049943	0	-0.6
ADF7 FFF0 001F D15F PP00 000	120	PP	406048350	0	0
...
ADF7 FFF0 015F D15F PP00 000	680	PP	406048350	0	0
...
ADF7 FFF0 015F D15F PP00 000	1798	PP	406049943	0	-0.6
ADF7 FFF0 016F D15F PP00 000	1800	PP	406050057	-0.6	-0.6
...
ADF7 FFF0 030F D15F PP00 000	1828	PP	406051650	0	-0.6
...
ADF7 FFF0 030F D15F PP00 000	3508	PP	406051650	0	-0.6
ADF7 FFF0 001F D15F PP00 000	3600	PP	406048350	0	0
...

D.4.2 Performance Evaluation Script for C/S T.018 ELT(DT)s

Performance script described in this section shall be transmitted in self-test mode to avoid any disruption of the operational system.

The script is comprised of 25 beacon IDs, each transmitting 63 bursts, with a fixed repetition rate of 28.5 seconds and beacon events are separated by 1 second. The transmission frequency shall be spread around 406.05 MHz so that it covers a range of 3.3 kHz with a resolution of 412.5 Hz.

The script shall be repeated for a duration of at least 4 hours to allow various geometric configurations and tracking plan.

The 23 Hex IDs of beacons events are coded as follows: 9C54 FFF0 0YYF DNNF PP00 0ZZ

- 9C54: fixed value for all beacon events (this is an example using a French country code 226),
- FFF0: TAC 65532 for beacon simulator, followed by the first 2 bits of the serial number set to 00,
- YY : beacon event serial 01 to 25,
- D: fixed value for all beacon events,
- NN: total number of transmitted burst (fixed value) to be transmitted for each beacon ID during each execution of the script (63),
- PP: transmitted power,
- ZZ: frequency shift factor, between 0 and 8 (the transmitted frequency shall be $f_t = f_0 - 1650 + ZZ \times 412.5 \text{ Hz}$, with $f_0 = 406.05 \text{ MHz}$). A correspondence between ZZ and YY is given in the table below.

The appropriate country code is to be coded within the 23 Hex ID to indicate which beacon simulator is transmitting the burst.

The script of this test shall implement beacon messages encoded with the Test Protocol bit 43 set to 1.

The following table give additional guidance about the test script to be used:

23 Hex ID	Time of Transmission T0 + XX s	Transmission Power (dBm)	Frequency ZZ
9C54 FFF0 001F D63F PP00 001	0	PP	0
9C54 FFF0 002F D63F PP00 008	1		8
9C54 FFF0 003F D63F PP00 001	2		1
9C54 FFF0 004F D63F PP00 007	3		7
9C54 FFF0 005F D63F PP00 002	4		2
9C54 FFF0 006F D63F PP00 006	5		6
9C54 FFF0 007F D63F PP00 003	6		3
9C54 FFF0 008F D63F PP00 005	7		5
9C54 FFF0 009F D63F PP00 000	8		0
9C54 FFF0 010F D63F PP00 008	9		8
9C54 FFF0 011F D63F PP00 001	10		1
9C54 FFF0 012F D63F PP00 007	11		7

9C54 FFFF 013F D63F PP00 002	12		2
9C54 FFFF 014F D63F PP00 006	13		6
9C54 FFFF 015F D63F PP00 003	14		3
9C54 FFFF 016F D63F PP00 005	15		5
9C54 FFFF 017F D63F PP00 000	16		0
9C54 FFFF 018F D63F PP00 008	17		8
9C54 FFFF 019F D63F PP00 001	18		1
9C54 FFFF 020F D63F PP00 007	19		7
9C54 FFFF 021F D63F PP00 002	20		2
9C54 FFFF 022F D63F PP00 006	21		6
9C54 FFFF 023F D63F PP00 003	22		3
9C54 FFFF 024F D63F PP00 005	23		5
9C54 FFFF 025F D63F PP00 004	24		4
9C54 FFFF 001F D63F PP00 000	28.5		0
9C54 FFFF 002F D63F PP00 008	29.5		8
...

- END OF ANNEX D -

ANNEX E**DATA FORMAT****E.1 General**

This annex describes the data format to be provided in electronic files using ASCII format to the Cospas-Sarsat Secretariat when commissioning a MEOLUT. The data is to be provided in a comma separated value (csv) format, and each field shall include an entry. If there is no data for any given field, then the field can be empty. All solution data used in the commissioning testing shall be provided.

Data file shall use the suffix “_Ex.csv” (e.g., 2019-01-01_E2.csv for a MEOLUT satellite tracking file).

A description of the fields is provided below:

Field	Relative position of the data
Description	Description of the information provided
Detailed Format	Guidance on how the data should be provided
Type	C - Character, N - Numeric and L - Logical
Width	The total number of characters for the field
Dec	The total number of digits after the decimal point
MF#	Message Field as described in document C/S A.002 (SID)
Comments	

Table E.1: Description of the Fields

E.2 MEOLUT Satellite Tracking

The satellites tracked by the MEOLUT during the commissioning test period shall be documented using the following format.

Field	Description	Detailed Format	Type	Width	Dec	MF#	Comments
1	LUT ID	xxxx	N	4		11	
2	Antenna ID	xx	N	2		71	Note 1
3	Satellite ID	xxx	N	3		6	
4	AOS_Time (Acquisition of Signal) (UTC)	yyyy-mm-dd hh:mm:ss.xxx	C	23			
5	LOS_Time (Loss of Signal) (UTC)	yyyy-mm-dd hh:mm:ss.xxx	C	23			

Table E.2:MEOLUT Satellite Tracking

Note:

- 1 The antenna may be either:
 - a. a traditional parabolic antenna that tracks a single satellite, or
 - b. an antenna that may track multiple satellites simultaneously (e.g., a phased array).

In either case, an antenna ID shall be provided.

E.3 Beacon Message Data

All beacon valid messages produced by the LUT for C/S T.001 and C/S T.018 beacons during the commissioning test period will be documented using the following format.

Field	Description		Detailed Format	Type	Width	Dec	MF#	Comments
1	Packet/record number (as collected)			N				
2	Raw/Full message (36 Hex) for C/S T.001 beacon, or raw/full message (63 Hex) for C/S T.018 beacon		h...h	C	36, or 63		77 for C/S T.001 beacons	Note 1
3	Beacon ID 15 Hex for C/S T.001 beacon, or 23 Hex for C/S T.018 beacon		h..h	C	15, or 23		22 for C/S T.001 beacons, or 92 for C/S T.018 beacons	
4	Time of packet received (UTC)		yyyy-mm-dd hh:mm:ss.xxx	C	23	3		Note 2
5	FOA (Hz)		nnnnnnnnnn.nnn	N	13	3	68	Note 3
6	Frequency Offset (Hz)		snnnnnnnn.nnn	N	10	3	70	Note 3
7	TOA (UTC)		yyyy-mm-dd hh:mm:ss.xxxxxxxxxx	C	29		67	Note 3
8	Time Offset (s)		n.nnnnnnnnn	N	11	9	69	Note 3
9	C/N ₀ (dB.Hz)		nn.n	N	4	2	72	
10	Bit rate (bps)		nnn.nnn	N	7	3	73	
11	LUT ID - Antenna ID		nnnnnn	N	6		2-71	Note 4
12	Spacecraft ID		nnn	N	3		6	
13	Satellite position (km)	X	snnnnnnnn.nnnn	N	11	4	75	Note 5
14		Y	snnnnnnnn.nnnn	N	11	4		
15		Z	snnnnnnnn.nnnn	N	11	4		
16	Satellite velocity (km/s)	X	snnn.nnnnnnn	N	11	6	76	Note 6
17		Y	snnn.nnnnnnn	N	11	6		
18		Z	snnn.nnnnnnn	N	11	6		
19	BCH-1/BCH errors		n	1	1		91	Note 7
20	BCH-2 errors		n	1	1			Note 8

Table E.3: Beacon Message Data

Notes:

- 1 For C/S T.018 beacons, field 2 is composed of the 250-bit C/S T.018 raw/full message, which shall be left padded (to form a 63 Hex character) with the following two bits:
 - bit 1: self-test indicator based on PRN sequence detected by the MEOLUT (0 = normal mode, 1 = self-test mode), followed by
 - bit 2: 0.
- 2 The time of packet received (UTC) is the logged time at which the packet is received at MEOLUT.
- 3 The values of TOA, FOA, TOA offset and FOA offset shall be provided after MEOLUT-internal calibration, if any.
- 4 The LUT ID followed by the antenna ID to form a 6-digit field. The antenna may be a traditional parabolic antenna that tracks a single satellite or an antenna that may track multiple satellites simultaneously (e.g., a phased array). In either case, an antenna ID shall be included.
- 5 Associated satellite position data and associated reference frame (preferably Earth-Centered Earth-Fixed frame) may be provided or optionally disclosed.
- 6 Associated satellite velocity data and associated reference frame (preferably Earth-Centered Earth-Fixed frame) may be provided or optionally disclosed.
- 7 For C/S T.001 beacons, this field gives the number of corrected errors by BCH-1. The number of errors is comprised between 0 and 3. For C/S T.018 beacons, this field gives the number of corrected errors by the BCH error correcting code. The number of errors is comprised between 0 and 6.
- 8 For C/S T.001 beacons, this field gives the number of corrected errors by BCH-2. The number of errors is comprised between 0 and 2. If not applicable (because of a short message or a protocol that do not use BCH-2), this field shall be left empty. For C/S T.018 beacons, this field shall be left empty.

E.4 LUT Database for Solution Data

All the location solutions produced by the LUT for the beacon IDs reported in the commissioning report during the commissioning test period shall be documented according to the format defined.

Field	Description	Detailed Format	Type	Width	Dec	MF#	Comments
1	Solution ID		N				Note 1
2	LUTID	nnnn	N	4		2	
3	Time stamp of 1 st burst used for location (UTC)	yyyy-mm-dd hh:mm:ss.xxx	C	23		14a	
4	Time stamp of last burst used for location (UTC)	yyyy-mm-dd hh:mm:ss.xxx	C	23		14b	
5	Time of location computation or time solution sent (UTC)	yyyy-mm-dd hh:mm:ss.xxx	C	23		3	
6	Beacon ID 15 Hex for C/S T.001 beacon, or 23 Hex for C/S T.018 beacon	h..h	C	15, or 23		22, or 92	

Field	Description	Detailed Format	Type	Width	Dec	MF#	Comments
7	Estimated Transmission Frequency	406.nnnnnnnn	N	12	8		Note 2
8	Full message 36 Hex for C/S T.001 beacon, or 63 Hex for C/S T.018 beacon	h...h	C	36, or 63		77, or [90]	[note for MF#90]
9	Number of bursts used	nn	N	2		21	Note 3
10	Data used T/F/D	a	C	1			Note 4
11	LUT ID - Antenna IDs	nnnnnn ... nnnnnn	N			2-71	Note 5
12	Number of packets used to derive the solution	nnn	N	2		88	Note 6
13	Number of satellites used to derive the solution	nnn	N	3		Derived from MF#83	
14	Satellite IDs	nnn ... nnn	N			83	Note 7
15	JDOP	nn.nn	N	5	2		
16	Expected horizontal error	nnn.nn	N	7	3	89	
17	Location methodology	a - a	C	1			Note 8
18	Latitude(degree)	snn.nnnnn	M	9	5	25	Note 9
19	Longitude (degree)	snnn.nnnnn	N	10	5	26	Note 10
20	Altitude (km)	nn.nnnnnn	N	9	6	82	
21	Location error (km)	nnnn.nnn	N	8	3		Note 11
22	Course (degrees)	nnn	N	3	0		Note 12
23	Horizontal speed magnitude (m/s)	nnn.n	N	5	1		
24	Vertical speed magnitude (m/s)	snnn.n	N	6	1		Note 13
25	TOA residual standard deviation (s)	n.nnnnnnnnn	N	11	9		
26	FOA residual standard deviation (Hz)	nn.nnn	N	6	3		Note 13
27	Comment		C				

Table E.4: MEOLUT Solution Data

Notes:

- 1 This number has not to be generated by the LUT.
- 2 This value is an estimation of the beacon transmission frequency calculated as part of the location process.
- 3 Number of bursts used in location computation.
- 4 T – TDOA only, F – FDOA only, D – TDOA/FDOA.
- 5 A list of LUT ID - Antenna ID (field 11 of Table E.3) separated by spaces.
- 6 A packet is a burst received from a specific satellite/antenna combination (channel) with an associated TOA/FOA. A single transmitted burst can result in many packets received at a MEOLUT dependent on the number of available satellite data channels.
- 7 A list of satellite IDs separated by spaces. The satellites shall be listed in the same sequence as the LUT ID - Antenna ID specified in field 11.
- 8 Location methodology in the format “overall method – multi-burst method” where:

- “overall method” describes the type of location algorithm used.
For example:
 - P2Dd: position only in 2D with default altitude value,
 - P2Dm: position only in 2D with altitude data obtained from a Digital Elevation Model,
 - P3D: position only with altitude estimation,
 - P2D/V3D: position in 2D and velocity in 3D,
 - P3D/V3D: position in 3D and velocity in 3D,
- “multi-burst method” describes the type of multi-burst accumulation used.
For example:
 - Global: use all TOA/FOA data available from multiple bursts to calculate a single location,
 - Average: an average of successive single-burst locations.

9 Latitude to be provided in decimal and \pm format (i.e., without North or South indication).

10 Longitude to be provided in decimal and \pm format (i.e., without East or West indication).

11 Can be empty.

12 Velocity estimation, when available, shall be with respect to the estimate location and may be provided or optionally disclosed. If not provided, leave it empty.

13 Can be set to 0 or to a default value if the number of measurements is equal to the number of unknowns, and may be provided or optionally disclosed. If not provided, leave it empty.

E.5 MCC Message Log Table

All the location and detection solutions produced by the LUT and intended to be sent to the MCC during the commissioning test period shall be documented according to the same format provided in section E.4. If no location is available, the location fields (e.g., latitude, longitude, DOP etc.) would be empty.

SIT messages listed in Table 3.1 of document C/S T.019 shall be collected and provided as part of the data package.

E.6 Beacon Database Description

Field	Description	Detailed Format	Type	Width	Dec	Comments
1	Beacon Number	nn	N	2		
2	Location		C	11		
3	Beacon ID 15 Hex for C/S T.001 beacon, or 23 Hex for C/S T.018 beacon	h..h	C	15, or 23		
4	Beacon latitude	snn.nnnnn	N	9	5	
5	Beacon longitude	snnnn.nnnnn	N	10	5	
6	Beacon altitude (km)	snn.nnn	N	7		
7	Type of Beacon		C	4		

Field	Description	Detailed Format	Type	Width	Dec	Comments
8	Country Code		C	3		
9	Activation Time	yyyy-mm-dd hh:mm:ss.xxx	N	23		
10	Deactivation Time	yyyy-mm-dd hh:mm:ss.xxx	N	23		
11	Actual Time “On”	yyyy-mm-dd hh:mm:ss.xxx	N	23		
12	Actual Time “Off”	yyyy-mm-dd hh:mm:ss.xxx	N	23		
13	Comments		C			

Table E.6: Beacon Database Description

E.7 Beacon Test Script Log

All the beacon test scripts used during the LUT commissioning test period shall be documented using the format in Table E.7. For tests involving moving beacons, the reference trajectory shall be provided as per requirements of section 5.1.1.

Field	Description	Detailed Format	Type	Width	Dec	Comments
1	Transmission Time (UTC)	yyyy-mm-dd hh:mm:ssxxxxxxxx	N	29		
2	Beacon ID 15 Hex for C/S T.001 beacon, or 23 Hex for C/S T.018 beacon	h.h	C	15, or 23		
3	Full message 36 Hex for C/S T.001 beacon, or 63 Hex for C/S T.018 beacon	h...h	C	36, or 63		Note 1
4	Transmitted power (dBm)	nn	N	2		
5	Transmitted frequency (MHz)	nnn.nnnnnn	N	10		
6	Beacon latitude (deg)	snn.nnnnn	N	9	5	
7	Beacon longitude (deg)	snnn.nnnnn	N	10	5	
8	Beacon altitude (m)	nnnn	N	4		
9	Course (degrees)	nnn	N	3	0	Note 2
10	Horizontal speed magnitude (m/s)	nnn.n	N	5	1	
11	Vertical speed magnitude (m/s)	snnn.n	N	6	1	
12	Chip rate accuracy (chips/s)	sn.n	N	4	1	Note 3
13	Chip rate variation (chips/s ²)	sn.n	N	4	1	
14	Comments		C			

Table E.7: Beacon Test Script Log

Notes:

- 1 For C/S T.018 beacons, field 3 is composed of the 250-bit C/S T.018 raw/full message, which shall be left padded (to form a 63 Hex character) with the following two bits:
 - bit 1: self-test indicator based on PRN sequence transmitted in the beacon script (0 = normal mode, 1 = self-test mode), followed by
 - bit 2: 0.
- 2 These fields can be left empty if the beacon velocity is not known.
- 3 Only for SGB bursts. If the information is not available in the beacon simulator log, the beacon simulator script can be provided instead.

- END OF ANNEX E -

ANNEX F

MEOLUT COMMISSIONING - PRINCIPLES AND POLICIES

F.1 References

The Cospas-Sarsat Council approved the general principles of its commissioning policy for MEOLUTs, provided hereunder in sections F.2, F.3 and F.4.

F.2 General

The following principles govern the commissioning of Cospas-Sarsat Ground Segment equipment:

- F.2.1** A State which has notified its association with the Cospas-Sarsat Programme as a Ground Segment Provider assumes the responsibility "to adhere to the technical specifications and operating procedures set by the Council for the purpose of ensuring adequate System performance" and "to provide, as agreed with the Council, appropriate performance data in order to confirm compatibility of its Ground Segment equipment with the System" (section 3.1 of the Letter of Notification).
- F.2.2** Cospas-Sarsat performance specification and design guidelines for MEOLUTs and MCCs are defined in documents C/S T.019 and C/S A.005, respectively.
- F.2.3** Cospas-Sarsat criteria and test methods for verifying that MEOLUTs and MCCs meet these standards are defined in documents C/S T.020 and C/S A.006, respectively.
- F.2.4** The responsible Agency or Administration installing and planning to operate a new MEOLUT or MCC shall plan and conduct appropriate tests, in accordance with the applicable Cospas-Sarsat standards, which may form part of its own acceptance testing.
- F.2.5** A commissioning report, including the results of the commissioning tests defined by Cospas-Sarsat, shall be submitted to the Cospas-Sarsat Secretariat, for review by the Joint Committee. The commissioning report must be submitted six weeks prior to the Joint Committee meeting. Reports submitted less than six weeks in advance will be considered at the subsequent Joint Committee meeting.
- F.2.6** After review of the commissioning report, the Joint Committee makes appropriate recommendations to the Cospas-Sarsat Council. Formal commissioning is recorded at the subsequent Council meeting, after approval of the Joint Committee recommendation by the Council.
- F.2.7** This commissioning and reporting procedure shall be implemented by all Cospas-Sarsat Ground Segment Providers, including Parties to the International Cospas-Sarsat Programme

Agreement, for commissioning new MEOLUTs and MCCs or new equipment or functions which have a significant impact on the Cospas-Sarsat Ground Segment operation.

- F.2.8** The cost of implementing the commissioning procedure and reporting to the Cospas-Sarsat Joint Committee is borne by the operating Agency or Administration installing the equipment to be commissioned.
- F.2.9** Ground Segment equipment will be commissioned into the Cospas-Sarsat System only if the formal association of the MEOLUT and MCC operator with the Cospas-Sarsat Programme has been notified in accordance with the standard procedure, unless otherwise agreed by the Council.

F.3 LUT Commissioning

The following principles govern the implementation of the Cospas-Sarsat MEOLUT Commissioning Standard (C/S T.020):

- F.3.1** The implementation of the commissioning procedure defined in document C/S T.020 is the responsibility of the operating Agency or Administration.
- F.3.2** The operating Agency or Administration will be responsible for equipment which may be required for performing the commissioning tests.
- F.3.3** A MEOLUT may be commissioned as a stand-alone system, independent of an MCC. However, MEOLUT commissioning may take place at the same time that the associated MCC is being commissioned.
- F.3.4** The MEOLUT/MCC interface is part of the MEOLUT commissioning. Therefore, it shall be tested as part of the MEOLUT commissioning procedure.
- F.3.5** If the test results in the commissioning report submitted by the operating Agency or Administration do not demonstrate full compliance document C/S T.019, corrective action shall be taken by the operating Agency or Administration.
- F.3.6** If the test results in the commissioning report submitted by the operating Agency or Administration do demonstrate full compliance with document C/S T.019, the alert data derived from the new MEOLUT can be immediately used by the associated MCC for distribution in accordance with document C/S A.001.
- F.3.7** Once the alert data derived from the new MEOLUT begins to be used by the associated MCC, a change of System status shall be notified to all MCCs by the associated MCC, in accordance with the procedure of document C/S A.001.
- F.3.8** The Joint Committee shall, at its following meeting, review the commissioning report and recommend to the Cospas-Sarsat Council, as appropriate, formal commissioning of the MEOLUT.

F.4 Status of the Cospas-Sarsat Ground Segment

F.4.8 After their commissioning, MEOLUTs are listed and described as appropriate in the applicable System documents and the “Cospas-Sarsat System Data” document.

F.4.8 The Cospas-Sarsat MEOLUTs commissioned in the Cospas-Sarsat System shall be listed on the Cospas-Sarsat website www.cospas-sarsat.int.

- END OF ANNEX F -

ANNEX G

GUIDELINES FOR INTEGRATION OF NEW MEOLUTS IN THE COSPAS-SARSAT SYSTEM

The introduction of new MEOLUTs in the Cospas-Sarsat System is supervised by the Technical Working Group (TWG) of the Cospas-Sarsat Joint Committee whose objectives include:

- a) the improvement of the overall performance of the Cospas-Sarsat Ground Segment; and
- c) the technical control of the development of the Cospas-Sarsat LUTs.

The guidelines hereunder, and Figure G.1, provide procedures for integrating a new MEOLUT into the Cospas-Sarsat Ground Segment.

1. Installation of New Equipment - The new MEOLUT(s) equipment should be sited to allow the widest possible horizon and to maximize coverage of national SRRs as well as the entire Cospas-Sarsat System. The location of the MEOLUT(s) should also allow for reliable communications with the associated MCC.
2. Ground Segment Description and MEOLUT Coverage - The national Administration should ensure that a description of the new MEOLUT(s) along with (1) coordinates, (2) address, (3) frequencies and (4) MEOLUT antenna masks are provided to the Cospas-Sarsat Secretariat.

The national Administration should also ensure that their MEOLUT(s) are properly registered with the International Telecommunications Union (ITU). The forms provided in Annex H to this document should be completed and forwarded to ITU through the appropriate national authorities.

3. Commissioning Test - For new Ground Segment Providers, the MEOLUT Commissioning tests may be scheduled to coincide with the MCC commissioning tests. In any case, the MEOLUT should be connected to the MCC and tested in its operational configuration, including optional capabilities, if used. However, statistics for optional capabilities shall be collected separately.

The MEOLUT Operator should ensure that test beacon(s) capable of transmitting the test code sequences contained in Annex D is (are) available for the commissioning test, or the MEOLUT Operator should coordinate with beacon simulator providers in the USA or France for the transmission of such code sequences. If test beacons/simulators cannot be used during the commissioning test, the MEOLUT Operator should ensure that an alternative method of confirming compliance is identified.

The relevant sections of this document describe the operational, functional and processing, and performance requirements to be tested. During the test, the data from the MEOLUT(s) should be transmitted to the associated MCC, however, the data should be suppressed by the MCC and not transmitted within the Cospas-Sarsat System.

4. Preparation of Commissioning Report - The results of the tests, along with the proper declarations and verifications for items not specifically tested, should be documented in a commissioning report. Annex A to this document contains the format of the commissioning report.


The commissioning report should include as a minimum the information requested in this document and in the format contained in Annex A. In addition, information to explain or clarify results should also be included in the commissioning report.

Any anomaly, or failure to meet a requirement, observed during the commissioning test should be corrected and the requirement re-tested. After the MEOLUT satisfies the requirements of document C/S T.019, the completed commissioning report should be submitted by the national Administration to the Cospas-Sarsat Secretariat.

5. **Initial Operational Capability (IOC)** - If the commissioning test has been completed successfully, and the commissioning report has been forwarded to the Cospas-Sarsat Secretariat, the MEOLUT may begin operations in an IOC status. However, the MEOLUT cannot reach IOC status prior to the MCC IOC date if the associated MCC is also in the commissioning process. The national Administration, through its associated MCC, should notify all Ground Segment Operators of a MEOLUT's IOC status via a System Status message.

The IOC phase allows a thorough review of the MEOLUT performance. However a MEOLUT shall not remain in an IOC phase for more than one year. MEOLUTs that have not reached FOC within one year will be considered not operational, and documented as "Under Development". To regain IOC status the MEOLUT will require a retest of the elements which prevented it from reaching FOC. The MEOLUT then must operate again in an IOC phase prior to reaching FOC. All Cospas-Sarsat Ground Segment Operators should monitor the data from new MEOLUTs for any significant anomalies that could impact Cospas-Sarsat operations.

6. **Full Operational Capability (FOC)** - If after 90 days of operation in an IOC state no anomalies are detected in the performance of the MEOLUT, the MEOLUT should be declared at FOC by the appropriate nodal MCC. The transition of a MEOLUT from an IOC status to a FOC status ensures that the MEOLUT performs to Cospas-Sarsat standards and does not negatively impact System operations.
7. **Formal Commissioning** - The Joint Committee reviews the commissioning report and, pending additional details or explanations, submits the report to the Cospas-Sarsat Council. The Council accepts the commissioning report and the MEOLUT is formally commissioned in the Cospas-Sarsat Ground Segment.

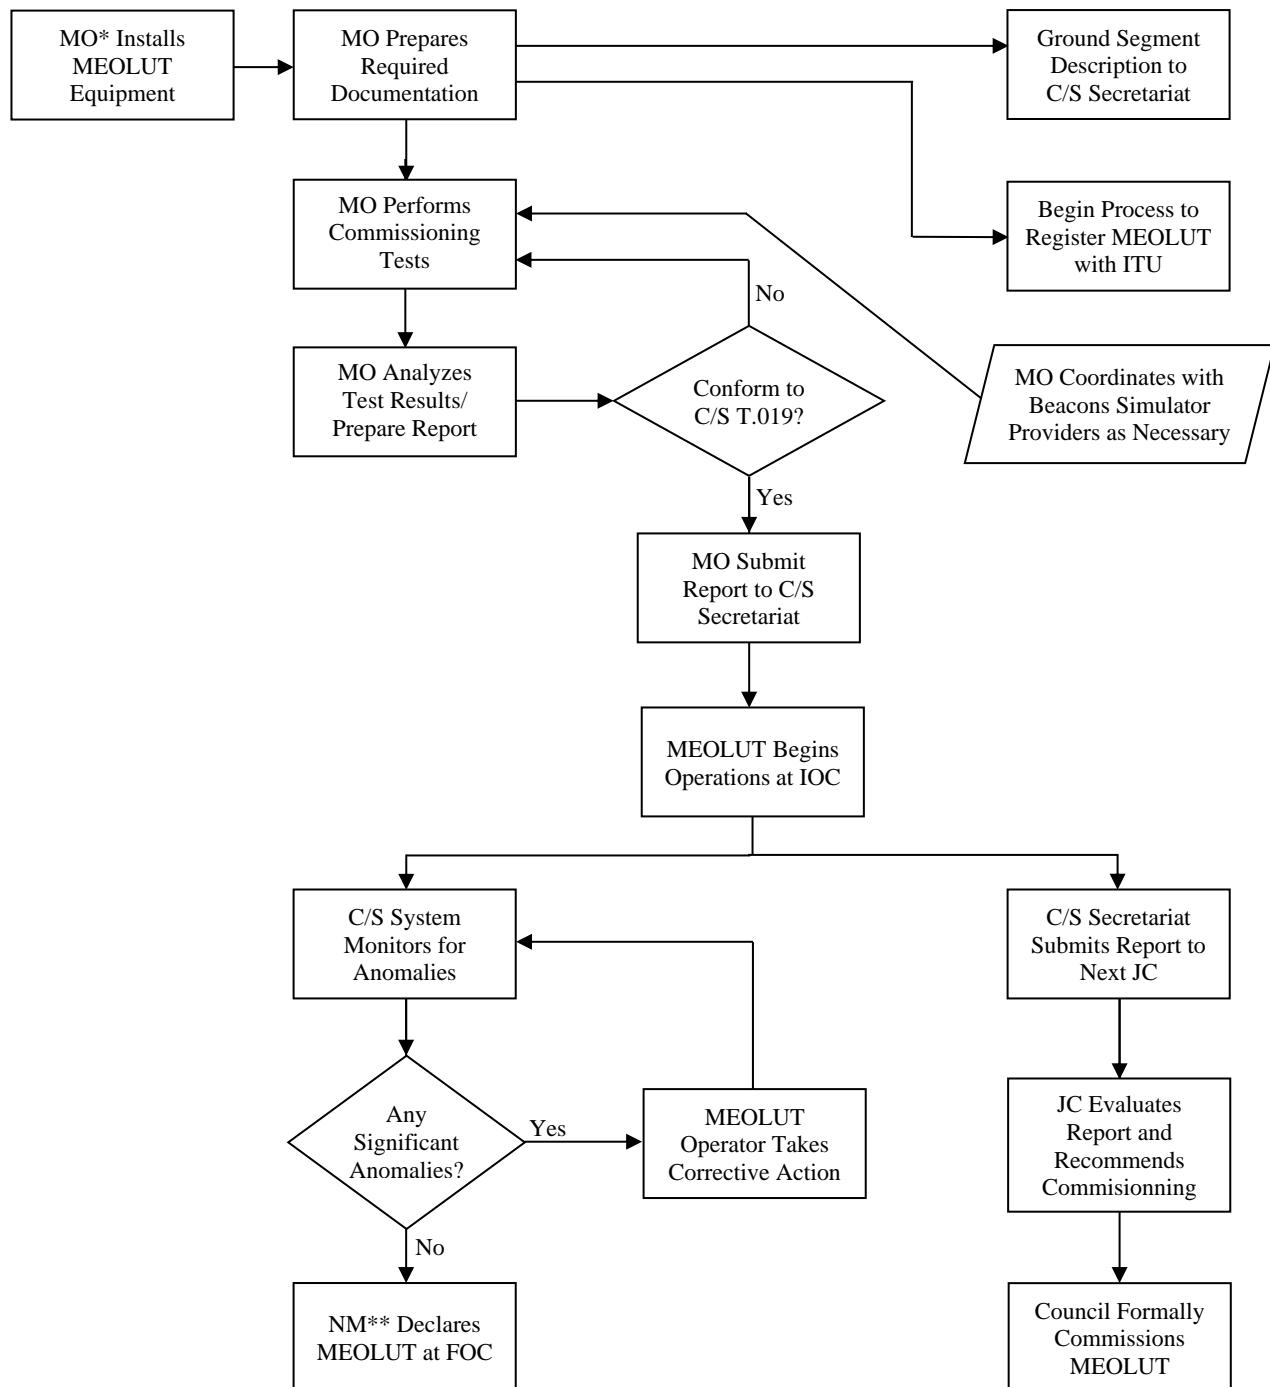Figure G.1: Overview of MEOLUT Integration

* MO: MEOLUT operator

** NM: Nodal MCC

ANNEX H**GUIDELINES FOR REGISTRATION OF NEW MEOLUTS WITH ITU**

[This Annex shall be taken from the corresponding Annex of document C/S T.005 (LEOLUT Commissioning Standard) or document C/S T.010 (GEOLUT Commissioning Standard), with the appropriate changes made to ensure that all references to LEOLUTs or GEOLUTs are changed to MEOLUTs.]

- END OF ANNEX H -

- END OF DOCUMENT -

Cospas-Sarsat Secretariat
1250 Boul. René-Lévesque West, Suite 4215, Montreal (Quebec) H3B 4W8 Canada
Telephone: +1 514 500 7999 / Fax: +1 514 500 7996
Email: mail@cospas-sarsat.int
Website: www.cospas-sarsat.int
